

Acer ICONIA Tab W500

SERVICEGUIDE

acer

Revision History

Refer to the table below for the updates made to this ICONIA Tab W500 service guide.

Date	Chapter	Updates

Service guide files and updates are available on the ACER/CSD Website. For more information, go to <http://csd.acer.com.tw>.

Disclaimer

The information in this guide is subject to change without notice.

There are no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties of merchantability or fitness for any particular purpose. The software described in this manual is sold or licensed "as is". Should the programs prove defective following their purchase, the buyer (not the manufacturer, distributor, or its dealer) assumes the entire cost of all necessary servicing, repair, and any incidental or consequential damages resulting from any defect in the software.

Copyright

© 2011 by Acer Incorporated. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of Acer Incorporated.

Conventions

The following conventions are used in this manual:

▲ WARNING:

Indicates a potential for personal injury.

▲ CAUTION:

Indicates a potential loss of data or damage to equipment.

+ IMPORTANT:

Indicates information that is important to know for the proper completion of a procedure, choice of an option, or completing a task.

The following typographical conventions are used in this document:

- Book titles, directory names, file names, path names, and program/process names are shown in *italics*.

Example:

the DRS5 User's Guide

/usr/local/bin/fd

the `/TPH15spool_M` program

- Computer output (text that represents information displayed on a computer screen, such as menus, prompts, responses to input, and error messages) are shown in constant width.

Example:

```
[01] The server has been stopped
```

- User input (text that represents information entered by a computer user, such as command names, option letters, and words) are shown in constant width bold.

Variables contained within user input are shown in angle brackets (< >).

Example:

At the prompt, type run `<file name> -m`

- Keyboard keys are shown in ***bold italics***.

Example:

After entering the data, press ***Enter***.

General information

Before using this information and the product it supports, read the following general information.

This service guide provides you with all technical information relating to the basic configuration for Acer's global product offering. To better fit local market requirements and enhance product competitiveness, your regional office may have decided to extend the functionality of a machine (such as add-on cards, modems, or extra memory capabilities). These localized features are not covered in this generic service guide. In such cases, contact your regional offices or the responsible personnel/channel to provide you with further technical details.

When ordering FRU parts: Check the most up-to-date information available on your regional Web or channel. If, for whatever reason, a part number change is made, it may not be noted in this printed service guide.

Acer-authorized Service Providers: Your Acer office may have a different part number code than those given in the FRU list in this service guide. You must use the list provided by your regional Acer office to order FRU parts for repair and service of customer machines.

CHAPTER 1

Hardware Specifications

Features	1-1
Operating System	1-1
Platform	1-1
System Memory	1-1
Display	1-1
Graphics	1-1
Storage Subsystem	1-1
Audio Subsystem	1-2
Communication	1-2
Dimensions and Weight	1-2
Power Adapter and Battery	1-2
Special Keys and Controls	1-3
I/O Ports	1-3
Optional Items	1-3
Software	1-3
Environment	1-5
Tablet PC Tour	1-6
Front View	1-6
Back View	1-7
Top View	1-7
Bottom View	1-8
Left View	1-8
Right View	1-9
Dock Station/Keyboard Top View	1-10
Dock Station/Keyboard Front View	1-10
Dock Station/Keyboard Left View	1-11
Dock Station/Keyboard Right View	1-11
Indicators	1-12
Using the Keyboard	1-12
Lock Keys	1-13
Windows Keys	

1-14

Hotkeys.....

1-15

Specification Tables

1-18

Computer specifications	1-18
Processor	1-20
Processor Specifications	1-21
System Fan True Value Table	1-21
System Memory	1-21
Memory Combinations	1-22
Graphics Controller	1-22
Video Interface	1-22
BIOS	1-22
LAN Interface	1-23
Keyboard	1-23
Hard Disk Drive (AVL components)	1-24
Super-Multi Drive Interface	1-24
BD Drive Interface	1-25
LED 10.1"	1-25
Display Supported Resolution (LCD Supported Resolution)	1-26
Graphics Controller	1-26
Display Supported Resolution (GPU Supported Resolution)	1-26
Display Supported Resolution (LCD panel Supported Resolution)	1-27
Bluetooth Interface	1-27
Bluetooth module	1-28
Mini Card	1-28
3G Card	1-28
Audio Codec and Amplifier	1-28
Audio Interface	1-30
Battery	1-30
VRAM	1-30
USB Port	1-30
AC Adapter	1-32
System Power Management	1-32
Card Reader	1-32
System DMA Specification	1-33

Hardware Specifications and Configurations

Features

The following is a brief summary of the computer's many features:

Operating System

- Microsoft Genuine Windows® 7 Home Premium 64-bit
- Microsoft Genuine Windows® 7 Home Premium 32-bit

Platform

- AMD® Brazos T50/C50
- AMD® HUDSON M1 Chipset

System Memory

- 2GB onboard DDR3 SDRAM

Display

- 10.1" LED backlight 1280 x 800 resolution, TFT LCD

Graphics

- APU intergrated

Storage Subsystem

Hard disk drive

- mSATA SSD 32/64GB Data Transfer Rates up to 3.0 Gb/s

2-in-1 card reader, supporting:

- Secure Digital (SD)
- MultiMediaCard (MMC)

Audio Subsystem

Realtek ALC271X-VB3-GR

Communication

Webcam

- 1.3M Pixle UVC Camera

Wireless and networking

- WLAN: Supporting IEEE 802.11 b/g/n
- WPAN: Bluetooth 2.1 EDR
- LAN: 10/100/1000 Ethernet support (need dock station)

Dimensions and Weight

Dimensions

- 275 (W) x 190 (D) x 15.95 (H) mm (10.8 x 7.5 x 0.6 inches)

Weight

- 940g with 3-cell battery
- Dock station 608g

Power Adapter and Battery

Power adapter

- 40 W AC adapter:
 - 93.2 (W) x 42.5 (D) x 32.2 (H) mm (3.67 x 1.67 x 1.27 inches)
 - 180 g (0.4lbs.) with 2500 mm DC cable

Battery

- 35.5W 11.1V 3280 mAh 3-cell Li-ion Battery
- Battery life: about 6 hours

Special Keys and Controls

Control keys

- Volume Key
- Windows Key/Power status indicator

I/O Ports

- 2-in-1 card reader (SD™, MMC)
- Two USB 2.0 ports
- HDMI® 1.4 port with HDCP support
- Headphone/Microphone jack
- DC-in jack for AC adapter
- Dock connector
- SIM card slot

Optional Items

- Dock station with 2 USB 2.0 ports ,a RJ25 LAN port and keyboard module

Software

Productivity

- Adobe Reader v9.1 for Tablet
- Barnes & Noble Desktop Reader
- NOOK for PC
- KOBO for Tablet
- Office 2010 x86
- Silverlight
- Windows Live Essentials 2011 for Tablet
- Acer Backup Manager for Tablet
- NY Times Reader
- Norton Online Backup

Security

- McAfee AntiVirus Plus for Tablet
- McAfee Virus Definitions

Multimedia

- Touch Application Suite
- clear.fi v1.0
- clear.fi v1.0 Client
- Acer Crystal Eye Webcam for Tablet
- Social Networks
- clear.fi patch
- MS Touch Pack

Entertainment / Game

- Wild Tangent Tablet WW Acer Edition

Communication and ISP

- VCM
- Skype for Tablet

Internet

- AUPEO for Tablet
- Adobe Flash Player
- Bing Bar
- BingSetup

Web links and utilities

- OOBE Offer Acer Edition
- Welcome Center
- Device Control
- XT9 Trace
- Acer Accessory Store
- Netflix Shortcut
- eBay Shortcut 2009

Support

- Acer Identity Card
- Acer Registration
- Acer Updater

Environment

- Temperature:
 - Operating: 5 °C to 35 °C
 - Non-operating: -20 °C to 65 °C
- Humidity (non-condensing):
 - Operating: 20% to 80%
 - Non-operating: 20% to 80%

Tablet PC Tour

This section provides an overview of the features and functions of the tablet PC.

Front View



Figure 1-1. Front View

Table 1-1. Top View

No	Item	Description
1	Latch	Secures the tablet to the docking station / keyboard when closed
2	Intergrated Webcam	Web camera for video communication.
3	Windows key/power status indicator	Press once to open the Start menu. Press power button while holding the Windows key to perform the <Ctrl> + <Alt> + function.

Back View



Figure 1-2. Back View

Table 1-2. Back View

No	Item	Description
1	Intergrated camara	Web camera for video communication.
2	SIM card slot	Accepts a 3G SIM card.
3	Speaker	Delivers audio output.

Top View



Figure 1-3. Top View

Table 1-3. Top View

No	Item	Description
1	Ventilation slot	Provides adequate air flow to maintain a safe operating temperature

Bottom View

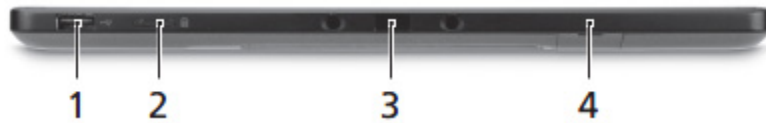



Figure 1-4. Bottom View

Table 1-4. Bottom View

No	Icon	Item	Description
1		USB 2.0 port	Connect to USB 2.0 devices (e.g., USB mouse, USB camera).
2		Lock switch	Locks the screen orientation. Note: Display orientation may be fixed when applications designed for a specific orientation are running. These include games, video calls, and other full-screen applications.
3		Dock connector/ USB 2.0 port	Connects to the supplied keyboard / docking station. USB port may also be used as a standard USB port.
4		SIM card slot	Accepts a 3G SIM card.

Left View

Left view

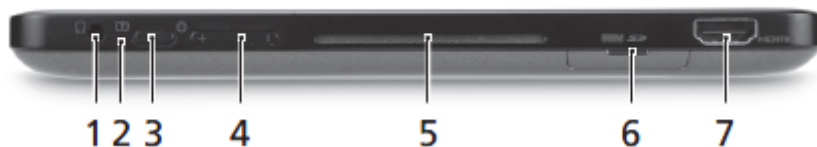







Figure 1-5. Left View

Table 1-5. Left View


No	Icon	Item	Description
1		Headphone jack	Connects to audio devices (e.g., speakers, headphones).
2		Battery LED	Indicates the computer's battery status. 1. Charging: Amber. 2. Fully charged: Blue when plugged in
3		Power button	Press to turn the tablet on; press again to place the tablet in Sleep mode. Press and hold to turn the tablet off
4		Volume key	Press to increase or decrease volume
5		Ventilation slot	Provides adequate air flow to maintain a safe operating temperature
6		2-in-1 card reader	Accepts Secure Digital (SD), MultiMediaCard (MMC). Note: Push to remove/install the card. Only one card can operate at any time.
7		HDMI Port	Supports high-definition digital video connections.

Right View



Figure 1-6. Right View

Table 1-6. Right View

No	Icon	Item	Description
1		DC in jack	Connects to an AC adapter

Dock Station/Keyboard Top View



Figure 1-7. Dock Station/Keyboard top View

Table 1-7. Dock Station/Keyboard top view

No	Item	Description
1	Dock connector	Connects to the tablet.
2	Keyboard	A standard keyboard with full-size keys.
3	Acer FineTrack pointing device	Pointing device to control cursor movement.
4	Latch	Secures the tablet to the docking station / keyboard when closed.
5	Left and right buttons	Function like the left and right mouse buttons.

Dock Station/Keyboard Front View



Figure 1-8. Dock Station/Keyboard front View

Table 1-8. Dock Station/Keyboard front View



No	Item	Description
1	Latch	Secures the tablet to the docking station / keyboard when closed.

Dock Station/Keyboard Left View



Figure 1-9. Dock Station/Keyboard left view

Table 1-9. Dock Station/Keyboard left view


No	Icon	Item	Description
1		Ethernet (RJ-45) port	Connects to an Ethernet 10/100/1000-based network.
2		USB 2.0 port	Connect to USB 2.0 devices (e.g., USB mouse, USB camera).

Dock Station/Keyboard Right View



Figure 1-10. Dock Station/Keyboard right view

Table 1-10. Dock Station/Keyboard right view

No	Icon	Item	Description
2		USB 2.0 port	Connect to USB 2.0 devices (e.g., USB mouse, USB camera).

Indicators

The computer has several easy-to-read status indicators. The following indicators are visible even when the computer cover is closed.

Table 1-11. Indicators

LED	State	Color	Description
Windows Home (Power)	Steady On	Blue	Power on
Windows Home (Power)	Steady On	Amber	System standby
Windows Home (Power)	Flashing	Amber	System is entering hibernation
Windows Home (Power)	Off	N/A	Power off
Battery	Steady On	Amber	Charging battery
Battery	Steady On	Blue	Full charge (Stop charging)
Battery	Off	N/A	No adapter in

Using the Keyboard

The keyboard contains an embedded numeric keypad, a separate cursor, windows key, lock function keys, special and full sized keys.



Figure 1-11. Keyboard Lock Keys

Lock Keys

The keyboard has three lock keys which the user can toggle on and off.

Table 1-12. Lock Keys

Lock key	Description
Caps Lock	When on, all alphabetic characters are in uppercase.
Num Lock	<p>Off by default. When On, internal keyboard acts as numeric key padlock. If an external keyboard or keypad is present, the Num Lock will have the following definitions:</p> <ul style="list-style-type: none"> • When On, the system boots with external keyboard/keypad Num Lock status On. Internal keyboard overlay numeric keys are disabled. • The key can be turned on/off via the internal keyboard (Fn+F11) or the external keyboard/keypad. Num Lock affects the external keyboard/keypad only. • Shift state is NOT used for the cursor movement by the numeric keys. • The state of the Num Lock is not changed by the attachment/removal (hot plug) of the external keyboard/keypad.
Scroll Lock	When On, the screen moves one line up or down when pressing up or down arrow keys. Scroll Lock is not applicable for all applications.

Windows Keys

The keyboard has two keys that perform Windows-specific functions.


















-  Windows Logo key
-  Application key

Table 1-13. Windows Keys

Key	Description
Windows Logo key	<p>Pressed alone, this key has the same effect as clicking on the Windows Start button; it launches the Start menu. It can also be used with other keys to provide a variety of functions.</p> <p>Functions supported by Windows XP, Windows Vista, and Windows 7:</p> <p><>: Open or close the Start menu</p> <p><> + <R>: Open the Run dialog box</p> <p><> + <M>: Minimizes all windows</p> <p><SHIFT> + <> + M: Undo minimize all windows</p> <p><> + <F1>: Show the help window</p> <p><> + <E>: Open Windows Explorer</p> <p><> + <F>: Search for a file or folder</p> <p><> + <D>: Show the desktop</p> <p><CTRL> + <> + <F>: Search for computers (search in network)</p> <p><> + <L>: Lock computer (if connected to a network domain), or switch users (if not connected to a network domain)</p> <p><CTRL> + <> + <TAB>: Moves focus from Start menu, to the Quick Launch toolbar, to the system tray (use RIGHT ARROW or LEFT ARROW to move focus to items on the Quick Launch toolbar and the system tray)</p> <p><> + <TAB>: Cycle through programs on the taskbar</p> <p><> + <BREAK>: Display the System Properties dialog box</p>
Application key	This key has the same effect as clicking the right mouse button; opening the application's context menu.

Hotkeys

The computer uses hotkeys or key combinations to access most computer controls.

To activate hotkeys, press and hold the **<Fn>** key before pressing the key in the combination.



Figure 1-12. Keyboard Hotkeys

Table 1-14. Hotkeys











Hotkey	Icon	Function	Description
<Fn> + <F3>		Communication Device On/Off	Toggles WiFi, and Bluetooth On and Off using a pop-up window.
<Fn> + <F4>		Hibernation	Puts the computer in Sleep mode.
<Fn> + <F5>		Display toggle	Switches display output between the display screen, external monitor (if connected) and both.
<Fn> + <F6>		Backlight On/Off	Turns Off the LCD back light
<Fn> + <F7>		Track point On/Off	Turns On/Off the Track point
<Fn> + <F8>		Mute switch	Turns the speakers On and Off.
<Fn> + <Page Up>		Home	Page home
<Fn> + <Page Down>		End	Page End
<Fn> + <Up>		Volume up	Increases the volume

Table 1-14. Hotkeys (Continued)

Hotkey	Icon	Function	Description
<Fn> + <Down>		Volume down	Decreases the volume
<Fn> + <Left>		Brightness up	Increases the brightness of LCD
<Fn> + <Right>		Brightness down	Decreases the brightness of LC

System Block Diagram

Armani EAB00 AMD Brazos Platform Rev.2.0 BLOCK DIAGRAM

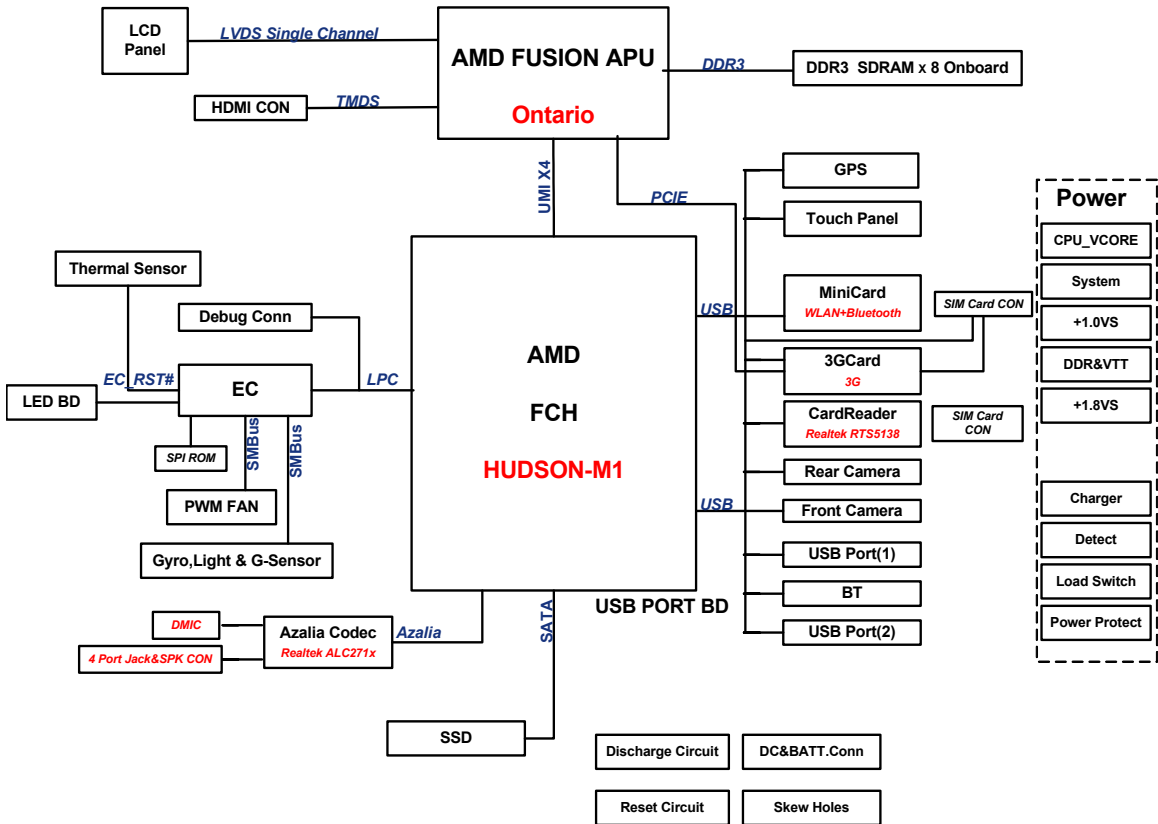


Figure 1-13. System Block Diagram

Specification Tables

Computer specifications

Item	Metric	Imperial
Dimensions		
Length	275mm	10.8 inches
Width	190mm	7.5 inches
Height (front to rear)	15.95mm	0.6 inches
Weight (equipped with battery)	940g	2.07 lbs
Input power		

Item	Metric	Imperial
Operating voltage	19V at 2.15A Max for 40W	
Operating current	2.15A(Max)	
Temperature		
Operating	5°C to 35°C	41°F to 95°F
Nonoperating	-20°C to 65°C	-4°F to 149°F
Relative humidity		
Operating	20% - 80%	
Nonoperating	20% - 80%	
Maximum altitude (unpressurized)		
Operating	N/A	
Nonoperating	N/A	
Shock		
Operating	105 g, 2 ms, half-sine	
Nonoperating	220 g, 2 ms, half-sine	
Random vibration		
Operating	0.6 Grms, 5Hz to 500 Hz , Random Wave	
Nonoperating	1.5 Grms, 5Hz to 500 Hz , Random Wave	
⇒ NOTE: Applicable product safety standards specify thermal limits for plastic surfaces. The computer operates within this range of temperatures.		

System Board Major Chips

Item	Specification
Core logic	AMD HUDSON M1
LAN	ASIX AX88772B (Integrated in dock)
USB 2.0	AMD HUDSON M1
VGA	Integrated Graphics
Embedded controller	NUVOTON NPCE795LA0DX
Bluetooth	FOXCONN T77H196.00 (Atheros AR3011)
Wireless	FOXCONN T77H196.00 / FOXCONN T77H121.01 FOXCONN T77H194 / Liteon WN6606LH-AA
PCMCIA	N/A
Audio codec	Realtek ALC271X-VB3-GR
Card Reader	Realtek RTS5138

Processor

Item	Specification
APU	AMD Brazos T50/C50
Processor frequency	1000 MHz
Package	413-pin micro BGA
Supply voltage:	Core: 1.2V IO: 1.05V
Function feature	Compatible with Existing 32-Bit x86 and 64-bit AMD64 Code Base AMD64 Technology Dual-core Architecture 512-Kbyte 16-Way Associative ECC-Protected L2 Cache 64-bit floating-point unit (FPU) Temperature Sensor Interface (SB-TSI) 40-nm process for decreased power consumption AMD PowerNow Technology PCIe Technology x8 lane PCIeR Gen 1.0 and PCIe Gen 2.0 technology supported x4 Unified Media Interface PCIe link Integrated Memory Controller

Item	Specification
Graphics Features	Dedicated graphics memory controller AMD PowerPlay power management technology Vari-Bright technology DirectX 11 compliant, including full speed 32-bit floating point per component operations Motion Video Acceleration Supports DVD and SDTV/HDTV content playback with low CPU usage Motion video process acceleration technology

Processor Specifications

Item	CPU Speed (GHz)	Cores	Bus Speed(FSB/DMI/QBI)	Mfg Tech	L2 Cache	Package	Core Voltage
AMD Brazos T50	1.0	2	1066MT/S	40nm	512 KB	mBGA 413pin	1.2V
AMD Brazos C50	1.0	2	1066MT/S	40nm	512 KB	mBGA 413pin	1.2V

System Fan True Value Table

CPU Temperature	Fan Speed (RPM)	SPL Spec (dBA)
62	2750	22
66	4000	25
70	4400	28
75	4800	31
Throttling 20%: On= 78 °C; OFF=70 °C		
OS shut down at 87°C; H/W shut down at 97 °C		

System Memory

Item	Specification
Memory controller	APU embedded
Memory size	Onboard 2GB DDR3 RAM
DIMM socket number	N/A
Supports memory size per socket	N/A
Supports maximum memory size	N/A
Supports DIMM type	N/A

Item	Specification
Supports DIMM Speed	N/A
Support DIMM voltage	N/A
Supports DIMM package	N/A

Memory Combinations

Slot 1 (MB)	Slot 2 (MB)	Slot 3(MB)	Slot 4(MB)	Total Memory (MB)
There is no DIMM slot on ICONIA Tab W500				

Graphics Controller

Item	Specification
VGA Chip	APU embedded
Supports	Yes

Video Interface

Item	Specification
Chipset	APU embedded
Package	N/A
Interface	LVDS
Compatibility	36bpp
Sampling rate	60MHz

BIOS

Item	Specification
BIOS vendor	Insyde
BIOS ROM type	SPI
BIOS ROM size	16MB

Item	Specification
Features	Insyde code base Flash ROM 16 MB Support multi-boot Suspend to RAM (S3)/Disk (S4) Various hotkeys for system control Support SMBIOS 2.4 ,PCI2.3. DMI utility for BIOS serial number configurable/asset tag- Support PXE Support WinFlash System information Wake on LAN from S3 Wake on LAN from S5 in AC mode HDD password Crisis disk

LAN Interface

Item	Specification
LAN Chipset	ASIX AX88772B (Integarted in dock)
LAN connector type	RJ45
LAN connector location	RJ45 at the dock station left side
Features	Supports 10/100/1000

Keyboard

Item	Specification
Type	Chiclet Keyboard
Total number of keypads	84
Windows logo key	Yes
Internal & external keyboard work simultaneously	Plug USB keyboard to the USB port directly: Yes

Hard Disk Drive (AVL components)

Item	Specification
Vendor & Model Name	Sandisk SDSA4DH-032G Sandisk SDSA4DH-064G
Capacity (GB)	32 / 64
Bytes per sector	N/A
Data heads	N/A
Drive Format	
Disks	
Spindle speed (RPM)	N/A
Performance Specifications	
Buffer size	N/A
Interface	mSATA
Max. fast data transfer rate (MB/s)	Sequential read 160 Sequential write 100
Max. media data transfer rate (MB/s)	Sequential read 160 Sequential write 100
DC Power Requirements	
Voltage tolerance	3.3V+/-5%

⇒ NOTE:

No Hard disk drive available on ICONIA Tab W500, the table above is referring to SSD.

Super-Multi Drive Interface

Item	Specification
Vendor & Model name	No Super-Multi Drive available on ICONIA Tab W500
Performance Specification	
Transfer rate (KB/sec)	
Buffer Memory	
Interface	
Applicable disc format	
Loading mechanism	

Item	Specification
Power Requirement	
Input Voltage	

BD Drive Interface

Items	Specifications
Vendor & Model name	No BD Drive available on ICONIA Tab W500
Performance Specification	
Transfer rate	
Buffer Memory	
Interface	
Applicable disc format	
Loading mechanism	
Power Requirement	
Input Voltage	

LED 10.1”

Item	Specification
Vendor/model name	AUO/ B101EW05
Dimension with out bracket(mm)	229.46(H) × 149.2(V)
Display resolution (pixels)	1280 X 800
Pixel Pitch (mm)	0.1695 × 0.1695
Typical White Luminance (cd/m ²) also called Brightness	350 typ.300 min
Contrast Ratio	1300 typ 1000 min
Response Time (Optical Rise Time/Fall Time) msec	25 typ / 35 Max
Typical Power Consumption (watt)	3.4 max (Include Logic and Blu power)
Weight (without inverter)	355g max
Electrical Interface	LVDS

Item	Specification
Viewing Angle (degree) Horizontal (Right) CR = 10 (Left) Vertical (Upper) CR = 10 (Lower)	89 (left & right typ.) 85 (left & right min.) 89 (upper & lower typ.) 85 (upper & lower min.)

Display Supported Resolution (LCD Supported Resolution)

Resolution	16 bits	32 bits	Intel	NVIDIA	ATI
640X480 60Hz	Y	Y			
800X600 60Hz	Y	Y			
1024X600 60Hz	Y	Y			
1024X720 60Hz	Y	Y			
1280X720 60Hz	Y	Y			
1280X768 60Hz	Y	Y			
1280X800 60Hz	Y	Y			

Graphics Controller

Item	Specification
VGA Chip	APU embedded
Supports	Yes

Display Supported Resolution (GPU Supported Resolution)

Resolution	16 bits	32 bits
640×480 60Hz Single LVDS	Y	Y
800×480 60Hz Single LVDS	Y	Y
800×600 60Hz Single LVDS	Y	Y
1024×768 60Hz Single LVDS	Y	Y
1152×864 60Hz Single LVDS	Y	Y
1280×720 60Hz Single LVDS	Y	Y
1280×768 60Hz Single LVDS	Y	Y
1280×800 60Hz Single LVDS	Y	Y
1280×1024 60Hz Single LVDS	Y	Y
1366×768 60Hz Single LVDS	Y	Y
1440×900 60Hz Single LVDS	Y	Y
1400×1050 60Hz Single LVDS	Y	Y
640×480 60Hz HDMI TMDS	Y	Y

Resolution	16 bits	32 bits
720×348 60Hz HDMI TMDS	Y	Y
720×350 60Hz HDMI TMDS	Y	Y
800×480 60Hz HDMI TMDS	Y	Y
800×600 60Hz HDMI TMDS	Y	Y
854×480 60Hz HDMI TMDS	Y	Y
1024×768 60Hz HDMI TMDS	Y	Y
1152×864 60Hz HDMI TMDS	Y	Y
1280×768 60Hz HDMI TMDS	Y	Y
1280×1024 60Hz HDMI TMDS	Y	Y
1366×768 60Hz HDMI TMDS	Y	Y
1440×900 60Hz HDMI TMDS	Y	Y
1400×1050 60Hz HDMI TMDS	Y	Y
1600×1024 60Hz HDMI TMDS	Y	Y
1600×1200 60Hz HDMI TMDS	Y	Y
1920×1080 60Hz HDMI TMDS	Y	Y

Display Supported Resolution (LCD panel Supported Resolution)

Resolution	16 bits	32 bits
640×480 60Hz	Y	Y
800×480 60Hz	Y	Y
800×600 60Hz	Y	Y
1024×768 60Hz	Y	Y
1152×864 60Hz	Y	Y
1280×600 60Hz	Y	Y
1280×720 60Hz	Y	Y
1280×768 60Hz	Y	Y
1280×800 60Hz	Y	Y

Bluetooth Interface

Item	Specification
Chipset	ATH AR3011
Data throughput	<ul style="list-style-type: none"> ● TX 1.2Mbps/sec ● RX 1.2Mbps/sec
Protocol	3.0+HS

Item	Specification
Interface	USB 2.0
Connector type	<ul style="list-style-type: none"> • SM08B-SURS-TF/JST • SM06B-XSRK-ETB/SM08B-SURS-TF
Supported protocol	A2DP

Bluetooth module

Item	Specifications
Controller	AR3011
Features	<ul style="list-style-type: none"> • Mini USB module with built-in antenna • Bluetooth 3.0

Camera

Item	Specification
Vendor and Model	LITEON 10P2SF205
Type	1.3M

Mini Card

Item	Specification
Number supported	N/A
Features	No mini card slot available on ICONIA Tab W500

3G Card

Item	Specification
Features	No 3G function on ICONIA Tab W500

Audio Codec and Amplifier

Item	Specification
Audio Controller	Realtek ALC271X-VB3-GR

Item	Specification
Features	<ul style="list-style-type: none"> ● Four channels stereo ADC support 16/20/24-bit PCM format ● All DAC/ ADC support independent 44.1k/ 48k/ 96k/ 192 kHz sample rate ● All analog jack ports except MONO, BEEP-IN and HP-OUT are stereo input and output re-tasking ● Supports analog PCBEEP input, and a digital BEEP generator is integrated ● Headphone amplifier on port-I (HP-OUT) is designed to drive output without external DC blocking capacitors ● Software selectable 2.5V and 3.2V reference output for microphone bias ● Software selectable boost gain (+10/+20/+30dB) for analog microphone input ● Two jack detection pins: each supports detection of up to 4 jacks ● Supports two GPIO pins ● Supports EAPD (external amplifier power down) control for external amplifier ● Supports anti-pop mode when analog power AVDD is on and digital power is off ● Support 1.5V~3.3V scalable I/O for HD Audio link ● 48-pin LQFP 'Green' package ● Jack detection function is supported when device is in power down mode (D3)
Amplifier	Realtek ALC271X-VB3-GR embedded

Audio Interface

Item	Specification
Audio Controller	Realtek ALC271X-VB3-GR
Audio onboard or optional	On board
Mono or Stereo	Stereo
Resolution	Support 16/20/24bit PCM
Compatibility	HD audio Interface
Sampling rate	Sample rate up to 192Khz resolution VSR (Variable Sampling Rate)

Wireless Module 802.11 b/g/n

Item	Specification
Chipset	FOXCONN T77H196.00/FOXCONN T77H121.01 FOXCONN T77H194/Liteon WN6606LH-AA
Data throughput	11~54 Mbps, up to 150 Mbps (Physical Rate)
Protocol	802.11 b/g/n
Interface	PCIE bus

Battery

Item	Specification
Vendor	SANYO
Battery Type	Li-ion
Pack capacity	3240mAH
Number of battery cell	3
Package configuration	3S1P

VRAM

Item	Specification
Chipset	MICRON MT41J256M8HX
Memory size	256M*8
Interface	DDR3

USB Port

Item	Specification
USB compliance level	USB 2.0
Number of USB port(s)	2 USB 2.0 port at PAD, 2 USB 2.0 ports at dock station

Item	Specification
Location	2 at PAD bottom, 2 at dock left and right side
Output Current	1.0A for each connector

HDMI Port

Item	Specification
Compliance level	HDMI1.4a
Data throughput	Up to 16.7 million colors
Number of HDMI port(s)	1
Location	PAD left side

AC Adapter

Item	Specification
Vendor	Delta / Leader
Input rating	AC 100-240V, 50~60Hz
Maximum output AC current	40W:2.15A at 19V

System Power Management

Item	Specification
Mech. Off (G3)	All devices in the system are turned off completely.
Soft Off (G2/S5)	OS initiated shutdown. All devices in the system are turned off completely.
Working (G0/S0)	Individual devices like CPU and hard disc can be power managed.
Suspend to RAM (S3)	CPU set power down, VGA Suspend, PCMCIA SuspendAudio, Power Down, Hard Disk Power Down, CD-ROM Power Down, Super I/O Low Power mode.
Save to Disk (S4)	Also called Hibernation Mode. System saves all system states and data onto the disc prior to power off the whole system.

Card Reader

Item	Specification
Chipset	Realtek RTS5138
Features	Supports SD and MMC

System LED Indicator

Item	Specification
Lock	N/A
HDD access state	N/A
Wireless state	N/A
Windows HOME (Power)	<ul style="list-style-type: none">• Amber: Standby• Flash (Breath,amber): System is entering hibernation• Off: System is Off mode
Battery state	<ul style="list-style-type: none">• Blue : Full charge• Amber: Charging

System DMA Specification

Hardware DMA	System Function
DMA0	Not applicable
DMA1	Not applicable
DMA2	Not applicable
DMA3	Not applicable
DMA4	Direct memory access controller
DMA5	Not applicable
DMA6	Not Assigned
DMA7	Not Assigned

System Interrupt Specification

Hardware IRQ	System function
IRQ0	High precision event timer
IRQ1	PS/2 Standard Keyboard
IRQ08	High precision event timer
IRQ13	Numeric data processor
IRQ 81-190	Microsoft APCI-Compliant System
IRQ16	High definition Audio controller
IRQ17	Standard Enhanced PCI to USB Host controller
IRQ18	Standard OpenHCD USB Host Controller
IRQ19	High definition Audio controller/Standard AHCI 1.0 Serial ATA Controller

System IO Address Map

I/O address (hex)	System Function (shipping configuration)
000 - 01F	Direct memory access controller
000 - CF7	PCI bus
010 - 01F	Motherboard resources
020 - 021	Programmable interrupt controller
02E - 02F	Motherboard resources
040 - 043	System Timer
060 - 060	PS/2 Standard Keyboard
061 - 061	System Speaker
062 - 062	Microsoft ACPI-Compliant Embedded Controller
064 - 064	PS/2 Standard Keyboard
066 - 066	Microsoft ACPI-Compliant Embedded Controller
070 - 071	System CMOS/real time clock
072 - 073	Motherboard resources
080 - 080	Motherboard resources
081 - 08F	Direct memory access controller
092 - 092	Motherboard resources
0A0 - 0A1	Programmable interrupt controller
0B0 - 0B1	Motherboard resources
0C0 - 0DF	Direct memory access controller
0F0 - 0FE	Numeric data processor
3B0 - 3BB	AMD Radeon HD 6250 Graphics
3C0 - 3DF	AMD Radeon HD 6250 Graphics
400 - 4CF	Motherboard resources
4D0 - 4D1	Motherboard resources
4D6 - 4D6	Motherboard resources
680 - 6FF	Motherboard resources
77A - 77A	Motherboard resources
C00 - C01	Motherboard resources
C14 - C14	Motherboard resources
C50 - C52	Motherboard resources
C6C - C6C	Motherboard resources
C6F - C6F	Motherboard resources

I/O address (hex)	System Function (shipping configuration)
CD0 - CDB	Motherboard resources
D00 - FFFF	PCI bus
2000 - 20FF	AMD Radeon HD 6250 Graphics
2100 - 210F	Standard AHCI 1.0 Serial ATA Controller
2110 - 2117	Standard AHCI 1.0 Serial ATA Controller
2118 - 211F	Standard AHCI 1.0 Serial ATA Controller
2120 - 2123	Standard AHCI 1.0 Serial ATA Controller
2124 - 2127	Standard AHCI 1.0 Serial ATA Controller

CHAPTER 2

System Utilities

BIOS Setup Utility	2-1
Navigating the BIOS Utility	2-1
BIOS	2-2
Information	2-2
Main	2-4
Boot	2-6
Exit	2-7
BIOS Flash Utilities	2-8
DOS Flash Utility	2-9
WinFlash Utility	2-11
LAN EEPROM Utility:	2-12
DMI Utility	2-14

System Utilities

BIOS Setup Utility

A hardware configuration program built into a computer's BIOS (Basic Input/Output System). Preconfigured and optimized so users do not need to run this utility. If configuration problems occur, users may need to run Setup. Refer to Chapter 4, Troubleshooting when problem arises.

To activate the BIOS Utility, press **F2** during POST when prompted at the bottom of screen.

The setup feature of WT1 is categorized into 4 menus described in next few sections.

Navigating the BIOS Utility

Five menu options are:

- Information
- Main
- Boot
- Exit

To navigate through the following:

- Menu - use the left and right arrow keys
- Item - use the up and down arrow keys
- Change parameter value - press **F5** or **F6**.
- Entry Sub-Menu - Press **Enter**.
- Exit - Press **Esc**
- Load default settings - press **F9**. Press **F10** to save changes and exit BIOS Setup Utility

⇒ NOTE:

Parameter values can be changed if enclosed in square brackets []. Navigation keys appear at the bottom of the screen. Read parameter help carefully when making changes to parameter values. Parameter help is found in the Item Specific Help area of the screen. System information is subject to specific models.

BIOS

The following is a description of the tabs found on the InsydeH20 Setup Utility screen:

⇒ **NOTE:**

The screens provided are for reference only. Actual values may differ by model.

Information

This tab shows a summary of computer hardware information.

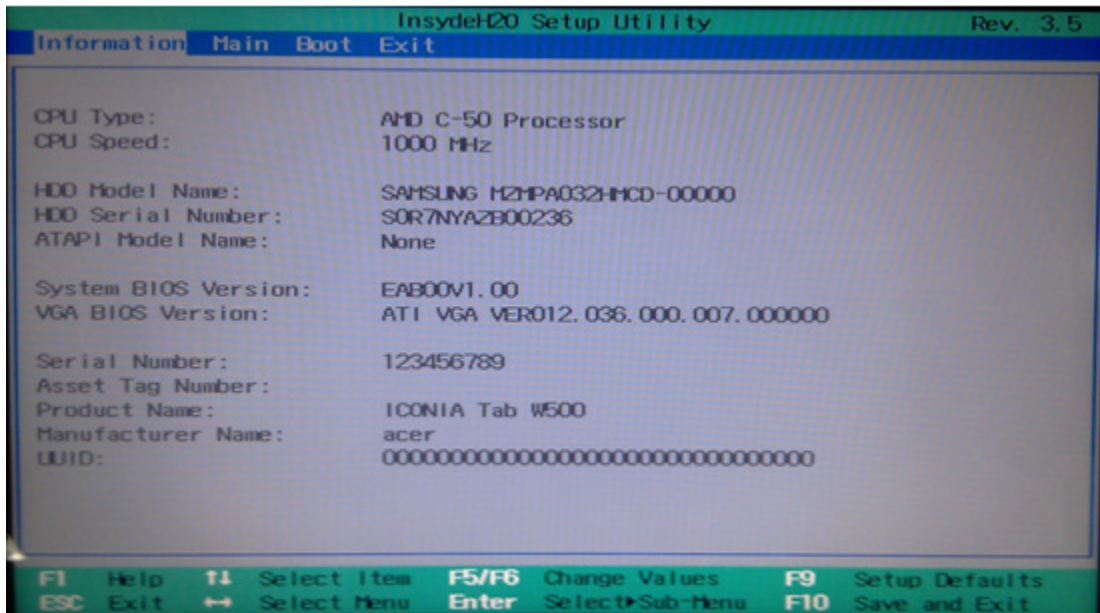


Figure 2-1. BIOS Information

Table 2-1 describes the parameters shown in Figure 2-1

Table 2-1. Parameters

Parameter	Description
CPU Type	The CPU type and speed of the system.
CPU Speed	The speed of the CPU.
HDD Model Name	The model name of HDD installed on primary IDE master.
HDD Serial Number	The serial number of HDD installed on primary IDE master.
ATAPI Model Name	The model name of the installed ODD drive.
System BIOS Version	Displays system BIOS version.
VGA BIOS Version	The VGA firmware version of the system.
Serial Number	The serial number of this unit.
Asset Tag Number	The asset tag number of the system.
Product Name	The product name of the system.
Manufacturer Name	The manufacturer name of the system.
UUID Number	Universally Unique Identifier (UUID) is an identifier standard used in software construction, standardized by the Open Software Foundation (OSF) as part of the Distributed Computing Environment (DCE).

Main

This tab allows the user to set system time and date, enable or disable boot option and enable or disable recovery.

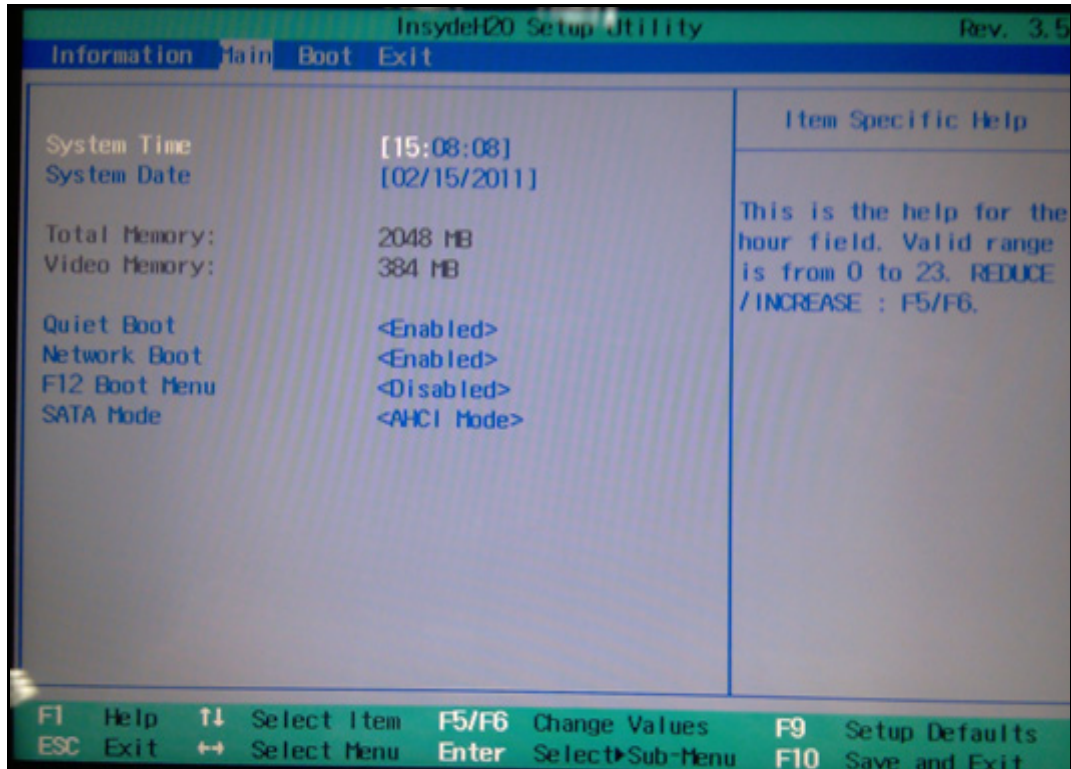


Figure 2-2. BIOS Main

Table 2-2 describes the parameters shown in Figure 2-2.

Table 2-2. BIOS Main

Parameter	Description	Format/Option
System Time	Sets the system time. The hours are shown with 24-hour format.	Format: HH:MM:SS (hour:minute:second)
System Date	Sets the system date.	Format MM/DD/YYYY (month/day/year)
Total Memory	Shows the total memory available.	N/A
Video Memory	Shows the available memory for Video.	N/A

Table 2-2. (Continued)BIOS Main

Parameter	Description	Format/Option
Quiet Boot	The notebook shows an illustration called the OEM screen during system boot instead of the traditional POST screen that shows the normal diagnostic messages.	Enabled or Disabled
Network Boot	Enables, disables the system boot from LAN (remote server).	Enabled or Disabled
F12 Boot Menu	Enables, disables Boot Menu during POST.	Enabled or Disabled
SATA Mode	Control the mode in which the SATA controller should operate.	AHCI or IDE

Boot

This tab allows changes to the order of boot devices used to load the operating system. In this menu users can decide the boot sequence, as long as the device with highest boot priority exists, system BIOS will boot from it, device boot priority is adjusted by pressing “F6”, “F5” or Enter key on the selected (highlighted) item. 6 bootable devices are listed in this menu (BIOS default boot sequence):

Use ↑ and ↓ keys to select a device and press <F5> or <F6> to move it up or down the list.

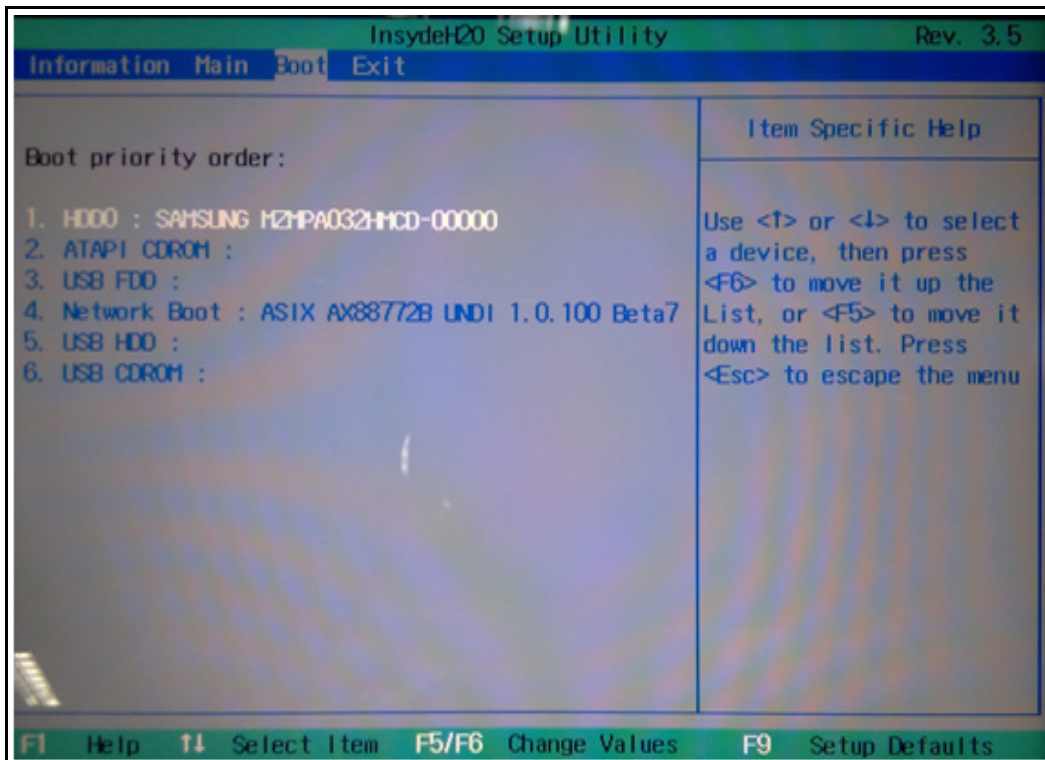


Figure 2-3. BIOS Boot

Exit

The Exit tab allows users to save or discard changes and quit the BIOS Utility.

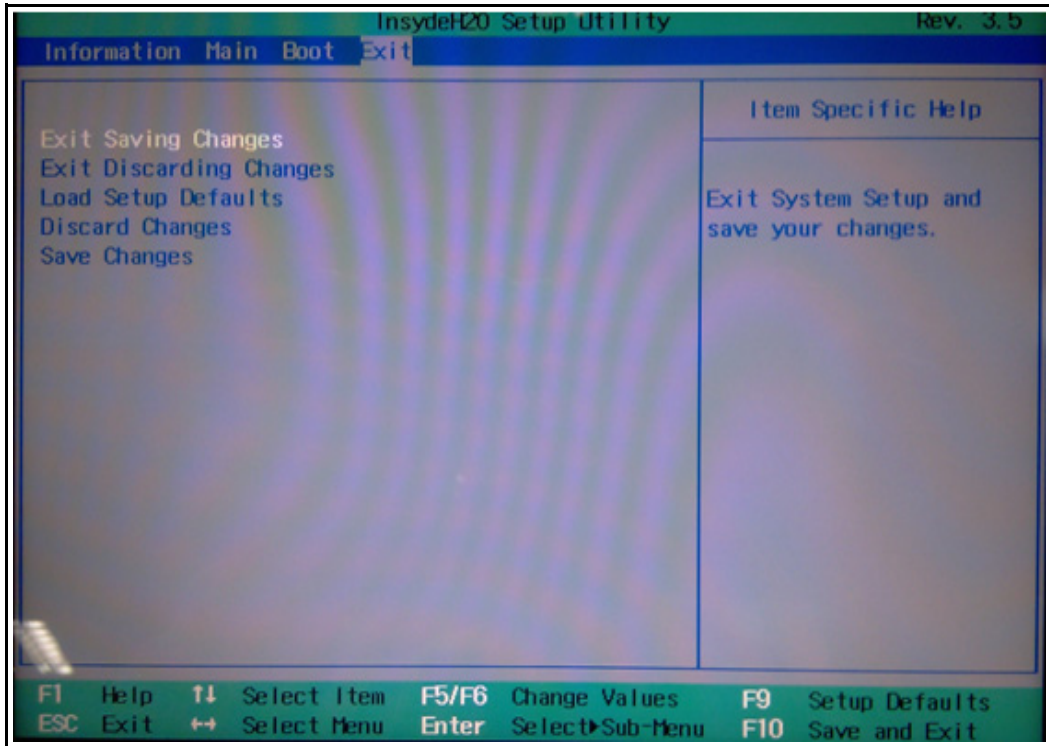


Figure 2-4. BIOS Exit

Table 2-4 describes the parameters in Figure 2-11.

Table 2-3. Exit Parameters

Parameter	Description
Exit Saving Changes	Exit System Setup and save changes to the system.
Exit Discarding Changes	Exit utility without saving setup data to.
Load Setup Default	Load default values for all setup item.
Discard Changes	Load previous values all setup items.
Save Changes	Save setup data.

BIOS Flash Utilities

BIOS Flash memory updates are required for the following conditions:

- New versions of system programs
- New features or options
- Restore a BIOS when it becomes corrupted.

Use the Flash utility to update the system BIOS Flash ROM.

⇒ **NOTE:**

Create a Crisis Recovery Disc, if one is not available, before the Flash utility is used.

⇒ **NOTE:**

Do not install memory related drivers (XMS, EMS, DPMS) when the Flash is used.

⇒ **NOTE:**

Use the AC adaptor power supply when running the Flash utility. If battery pack does not contain power to finish loading of the BIOS Flash, do not boot the system.

Perform the following to run the Flash:

1. Prepare a bootable diskette.
2. Copy the Flash utilities to the bootable diskette.
3. Boot the system from the bootable diskette.

⇒ **NOTE:**

The Flash utility has auto execution function.

DOS Flash Utility

Perform the following to use the DOS Flash Utility:

1. System shutdown
2. Then keep press Quick Button always.



3. Press Power Button.



4. Press **F2** during Boot, then enter Setup Menu.

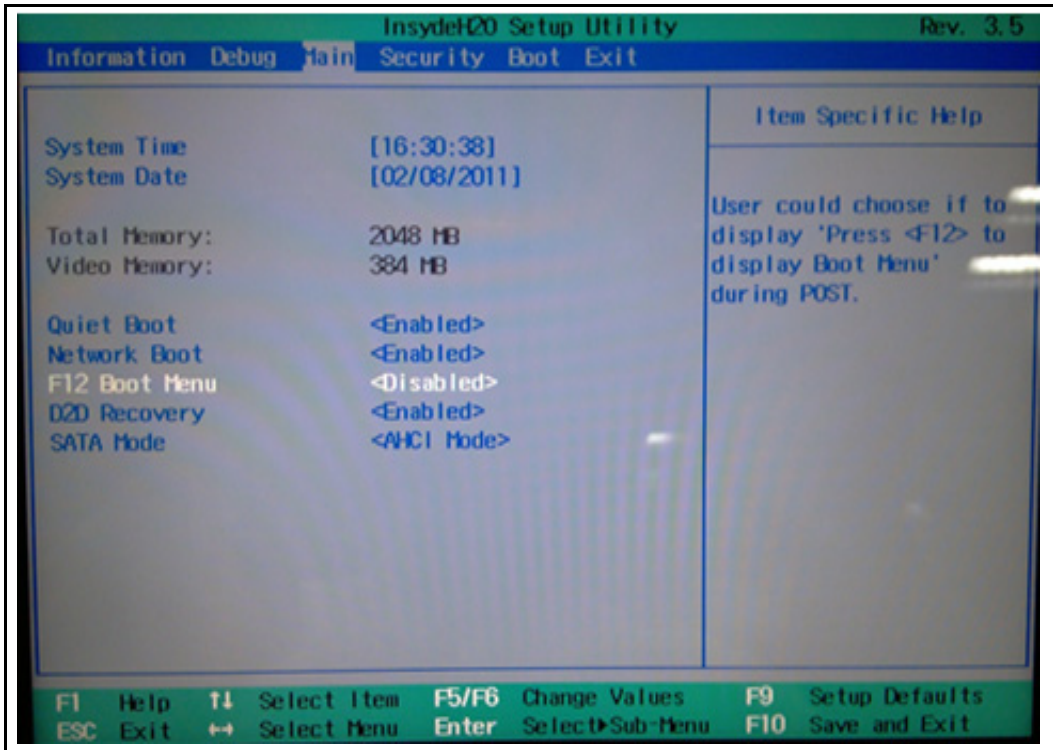
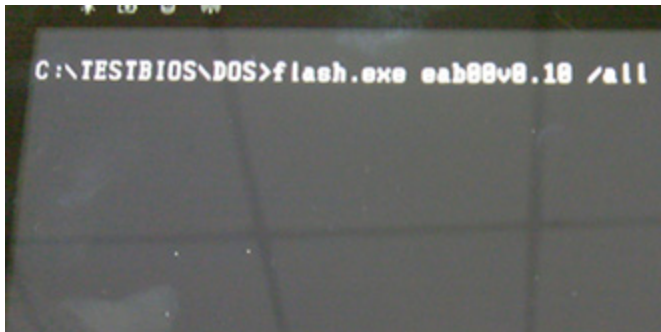


Figure 2-5. BIOS Boot

5. Enter Main Tab, Enabled “F12 Boot Menu”, then save and Exit.
6. During Reboot, press Quick Button, then press F12 when you see logo, select USB HDD Boot, enter Dos.



7. Please use [flashit.exe] to update BIOS, command is as below:
flash.exe XXXX.XX[BIOS Bin File Name]/all

Note :

Press Quick Button when Boot, to close BIOS quick start function. Then can select F2 to enter Setup Menu or press F12 and select Boot Device.
Keep AC power on, to avoid sudden power outages during update.
Please make sure correct BIOS version, can support this platform

WinFlash Utility

Perform the following to use the WinFlash Utility:

1. Double click the WinFlash executable.
2. Click **OK** to begin the update. A progress screen is shown (Figure 2-16).



Figure 2-6. InsydeFlash

LAN EEPROM Utility:

Lan Mac Change:

Please use Tool - ASIXSROM.exe to follow below steps:

Button #	Button Name	Description
1	Program	Start programming the EEPROM.
2	Save	Save the EEPROM content and the SROM tool configuration setting into the SROM.DAT and EEPROM.DAT files respectively.
3	Load	Load the SROM tool configuration setting from the EEPROM.DAT file.
4	Load SROM	Load the EEPROM content from the selected SROM data file (e.g. SROM.DAT).
5	Dump	Dump the EEPROM content to the message window and save into the SROM.DAT file.
6	Preview	Preview the coming programmed EEPROM content.
7	Convert	Convert the SROM data file (SROM.DAT) to binary file (SROM.BIN) for universal programmer
8	Help	Display Help messages.
9	Exit	Quit this program.

ASIX AX88x72A / 772B / 760 / 772 / 178 SROM Tool 1.24.0

Device Sel. AX88772B without BOTM SRAM Size (byte) : 256 512

Mac Address
 Current 1234567890AC Increase by
 Maximum FFFFFFFF 1

Serial Number
 Current 000004 Increase by 1
 Maximum FFFFFF Base on Mac Address

String
 Manufacture ASIX Elec. Corp.
 Product AX88772B

ID
 Vendor 0B95
 Product 772B
 Ext Phy
 ID None
 e[0x17] FFFF

Max Power
 High Speed 200 mA
 Full Speed 200 mA

Characteristics
 Bus Power
 Remote Wakeup Enable
 AutoDetach
 Fiber Mode

Reload Eeprom Bar-Code
 Reload Enable

Safety Setting
 Disable Setting

Programmed Mac Address
 12 34 56 78 90 AB

Program Save Load Load SROM Dump Preview

Convert Help Exit

```

15 5A EC 75 20 12 29 27 12 34 56 78 90 AB 09 04
60 22 71 12 19 0E 3D 04 3D 04 3D 04 3D 04 80 05
00 06 10 E0 42 24 40 12 49 27 FF FF 00 00 FF FF
C0 09 0E 03 30 00 30 00 30 00 30 00 30 00 33 00
12 01 00 02 FF FF 00 40 95 0B 2B 77 01 00 01 02
03 01 09 02 27 00 01 01 04 A0 64 09 04 00 00 03
FF FF 00 07 07 05 81 03 08 00 0B 07 05 82 02 00
02 00 07 05 03 02 00 02 00 FF 04 03 30 00 FF FF
12 01 00 02 FF FF 00 08 95 0B 2B 77 01 00 01 02
03 01 09 02 27 00 01 01 04 A0 64 09 04 00 00 03
FF FF 00 07 07 05 81 03 08 00 A0 07 05 82 02 40
00 00 07 05 03 02 40 00 00 DD FF FF AA AA BB BB
22 03 41 00 53 00 49 00 58 00 20 00 45 00 6C 00
65 00 63 00 2E 00 20 00 43 00 6F 00 72 00 70 00
2E 00 12 03 41 00 58 00 38 00 38 00 37 00 37 00
32 00 42 00 FF FF FF FF FF FF FF FF FF FF FF FF
  
```

EEPROM write OK.

Result

Note :

Before use this tool, please remove original Driver from OS, and need install tool which vender attached.

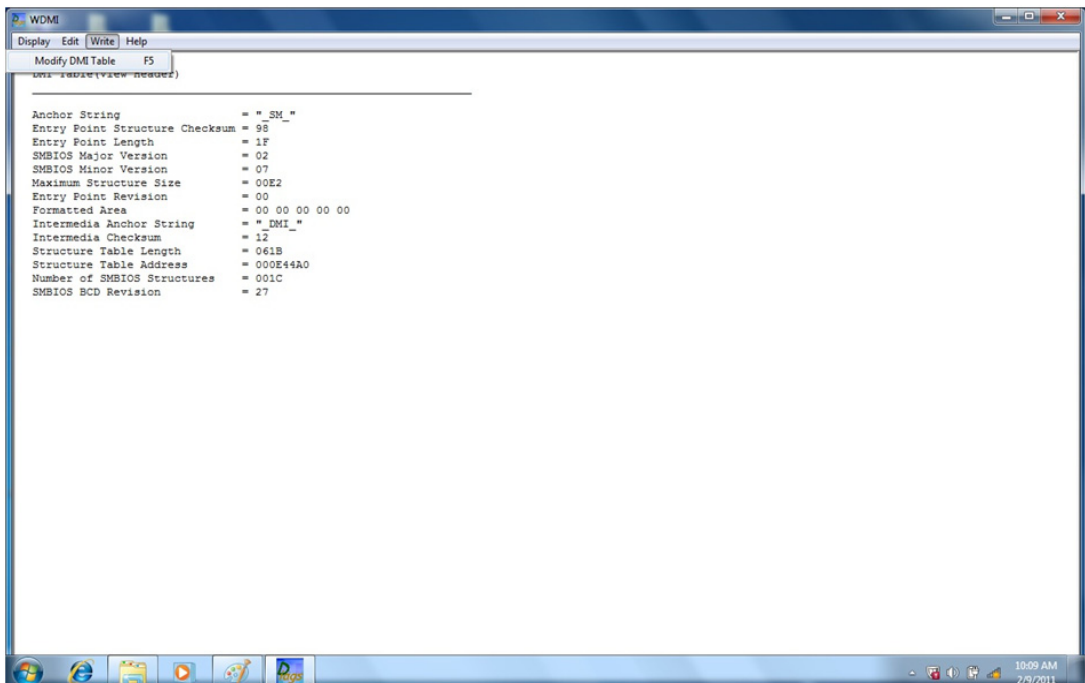
This MAC change only phase in Docking LAN.

DMI Utility

BIOS DMI Tools:

- (1). Use Pegatron DMI Tools – WDMI.exe
- (2). Operating steps :

Step 1 – Run WDMI.exe, Select Write->Modify DMI Table



Step 2 – Change information in DMI Table , confirm and click “OK to Update BIOS”

Step 3 –Manual Restart, and finish.

Modify DMI Table

Type 1: System

Manufacturer: acer

Product Name: ICONIA Tab W500

Version: EAB00V0.09.DebugPage

Serial Number: 123456789

UUID(Byte 1~16): 00|00|00|00 | 00|00|00|00 | 00|00|00|00 | 00|00|00|00

Type2: Base Board

Manufacturer: acer

Product Name: Hake

Version: Base Board Version

Serial Number: Base Board Serial Number

Type3 Enclosure or Chassis

Manufacturer: Chassis Manufacturer

Version: Chassis Version

Serial Number: Chassis Serial Number

Asset Tag Number:

OK to Update BIOS Cancel

Note :

According to customer Spec definition, BIOS will be set by Type1: Manufacture's information, to Switch their Logo.

CHAPTER 3

Machine Maintenance

Recommended Equipment	3-1
Replacement Requirements	3-1
Pre-disassembly Instructions	3-2
Disassembly Process	3-3
Main Unit Disassembly Process	3-4
Main Unit Disassembly Flowchart	3-5
Removing the Pad Cover	3-6
Removing the Battery Pack	3-7
Removing the Mini Card	3-8
Removing the 3G Module	3-11
Removing SSD Card Module	3-12
Removing the Thermal Module	3-13
Removing the Camera Module (on Pad Cover side)	3-14
Removing the Motherboard Module	3-15
Removing the LCD Bracket Module	3-16
Removing the Camera Module (on pad bezel side)	3-17
Docking Module Disassembly Process	3-18
Docking Module Disassembly Flowchart	3-18
Removing the Top case	3-19
Removing the USB Cable	3-20
Removing the LAN Board	3-21
Removing the USB Board	3-22
Removing the K/B Bracket	3-23
Removing Button Board & Keyboard	3-24
Removing the Connector Board	3-25
Main Unit Reassembly Procedure	3-26
Replacing the Camera Module(on Pad Bezel side)	3-26
Replacing the LCD Bracket Module	3-27
Replacing the Mother Board Module	3-28
Replacing the Camera Module (on Pad Cover side)	3-29
Replacing the Thermal Module	3-30
Replacing SSD Card Module	3-31
Replacing 3G Module	3-32
Replacing Mini Card Module	3-33
Replacing the Battery Module	3-36
Replacing the Pad Cover Module	3-37
Docking Module Reassembly Process	3-38
Replacing the Connector Board	3-38
Replacing Button Board & Keyboard	3-40
Replacing the K/B Bracket	3-41

Replacing the USB Board	3-42
Replacing the LAN Board	3-43
Replacing the USB Cable	3-44
Replacing the Top Case Module	3-45

Machine Disassembly and Replacement

This chapter contains step-by-step procedures on how to disassemble the notebook computer for maintenance and troubleshooting.

Cable paths and positioning may not represent the actual model. During the removal and installation of the components, ensure all available cable channels and clips are used and that the cables are replaced in the same position.

The screws for the different components vary in size. During the disassembly process, group the screws with the corresponding components to avoid mismatch when putting back the components.

The product previews seen in the disassembly procedures may not represent the final product color or configuration.

Recommended Equipment

To disassemble the computer, the following tools are suggested:

- Wrist grounding strap and conductive mat for preventing electrostatic discharge
- Flat screwdriver
- Phillips screwdriver
- Plastic flat screwdriver
- Plastic tweezers
- Cyanoacrylate glue

Replacement Requirements

⇒ NOTE:

Cabling and components require adhesive to be applied during the replacement and reassembly process.

Pre-disassembly Instructions

Before proceeding with the disassembly procedure, make sure to do the following:

1. Turn off the power to the system and all peripherals.
2. Unplug the AC adapter and all power and signal cables from the system.



Figure 3-1. AC Adapter

3. Place the system on a flat, stable surface.




Disassembly Process

The disassembly process is divided into the following sections:

- Main unit disassembly
- Docking module disassembly

The flowcharts provided in the succeeding disassembly sections illustrate the entire disassembly sequence. Observe the order of the sequence to avoid damage to any of the hardware components.

Table 3-1. Main Screw List

Screw	Quantity	Acer Part Number	Screw Type.
M2*3L (K) B-ZN #1 NY	12	86.L080U.001	
M2*4L (K) (?3.6)W-NI,NY	26	86.L080U.002	
M1.4*3L (K) B-ZN #0	9	86.L080U.003	

Main Unit Disassembly Process

Table 3-2. Screw List

Step	Screw	Quantity	Part No.
Mini Card Disassembly	M2*4L (K)	6	86.L080U.002
3G Card Disassembly	M2*4L (K)	1	86.L080U.002
SSD Card Disassembly	M2*4L (K)	1	86.L080U.002
Thermal Module Disassembly	M2*4L (K)	3	86.L080U.002
MotherBoard Disassembly	M2*4L (K)	7	86.L080U.002
LCD Panel Bracket Disassembly	M2*3L (K)	7	86.L080U.001
Camera (Bezel) Disassembly	M2*4L (K)	1	86.L080U.002

Main Unit Disassembly Flowchart

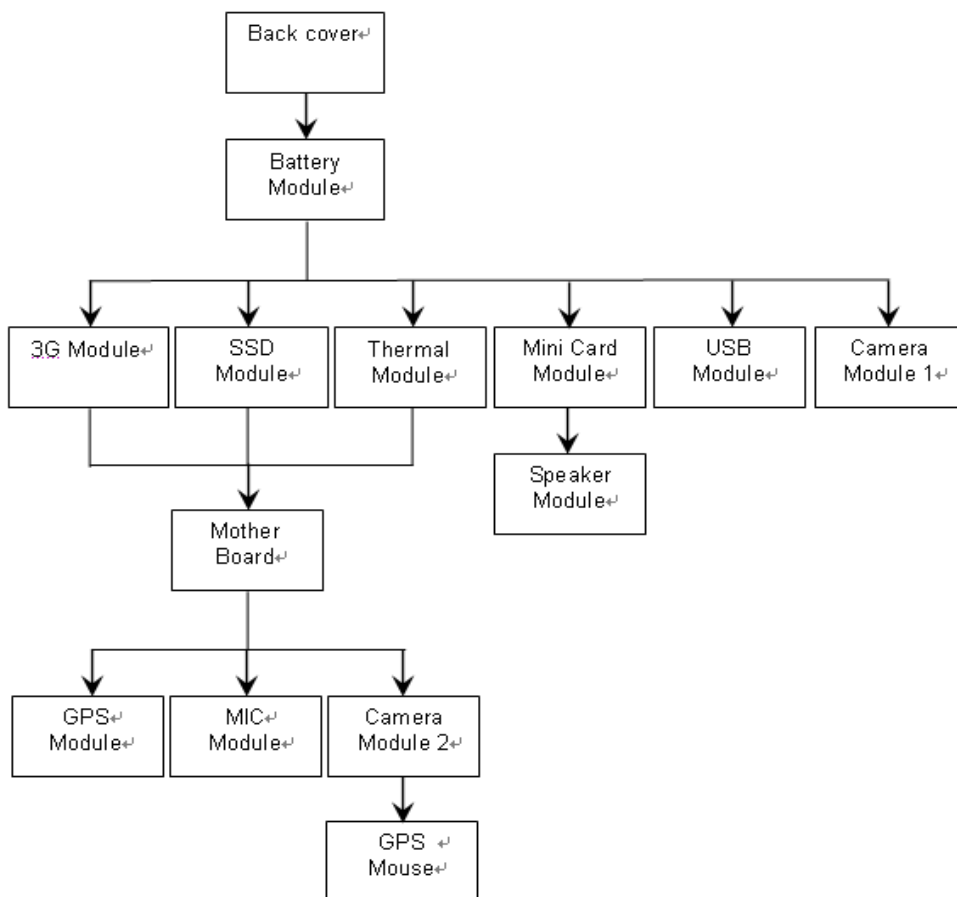


Figure 3-2. Main Unit Disassembly Flowchart

Removing the Pad Cover

1. Turn the computer over.
2. Disassembly should start on SD Card Slot and disassemble in this order. Remove the Pad cover away.



Figure 3-3. Pad Cover

Removing the Battery Pack

1. Disconnect the battery cable and remove the battery.



Figure 3-4. Battery Pack

Removing the Mini Card

1. Disconnect the **LVDS cable**, **Speaker Cable**, **USB BD Cable**, **DC-IN Cable** on MB. And take the LVDS Cable away

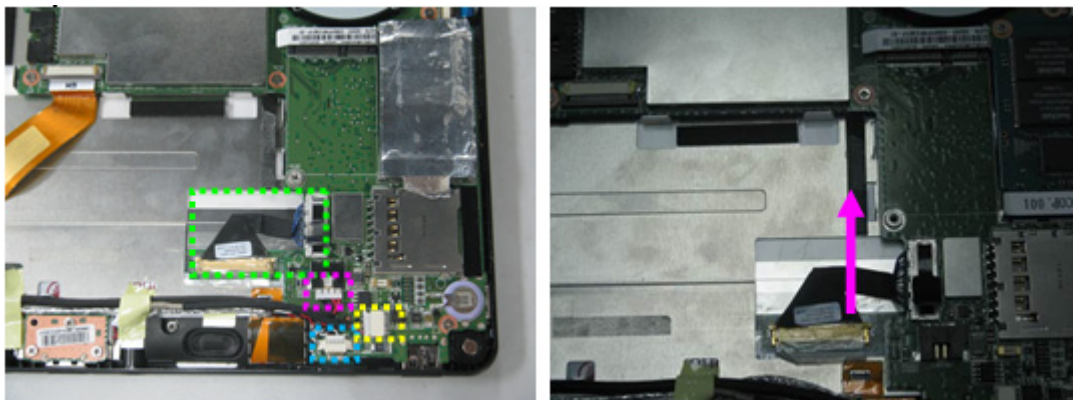


Figure 3-5. Mini Card

2. Tear the Paper on WLAN Board and Mylar on Mini Board, Remove **3 screws (M2*4L)**.

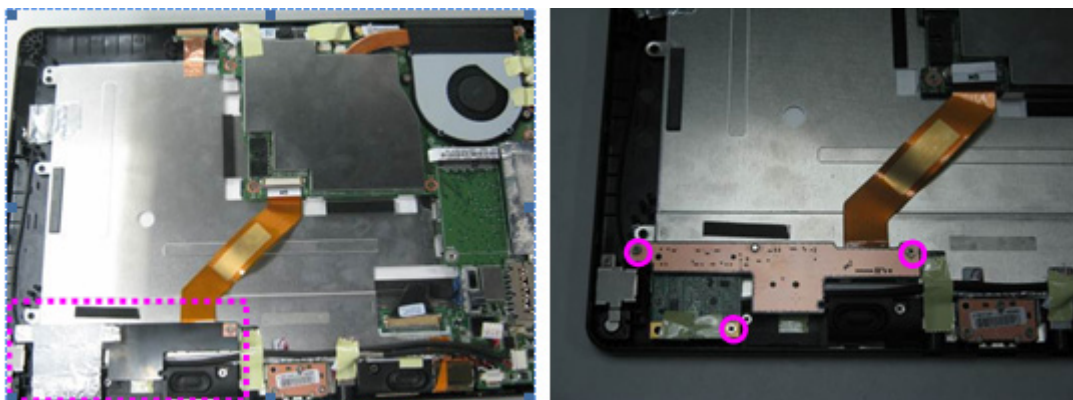


Figure 3-6. Mini Card

3. Disconnect the Mini Board Cable and take the Mini Card away.

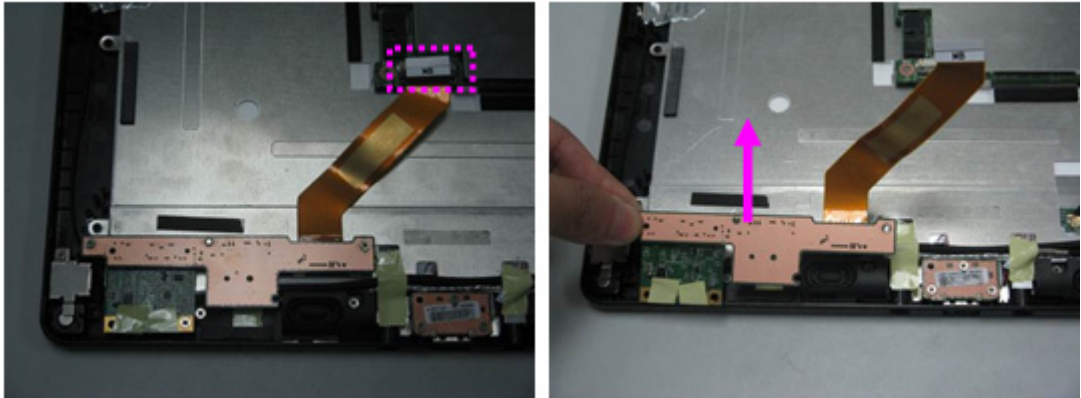


Figure 3-7. Mini Card

4. Disconnect the WLAN antennas and then pull out the card from its slot and take it away.



Figure 3-8. Mini Card

5. Remove 3 screws (M2*4L) on USB Board, take the Board and cable away.

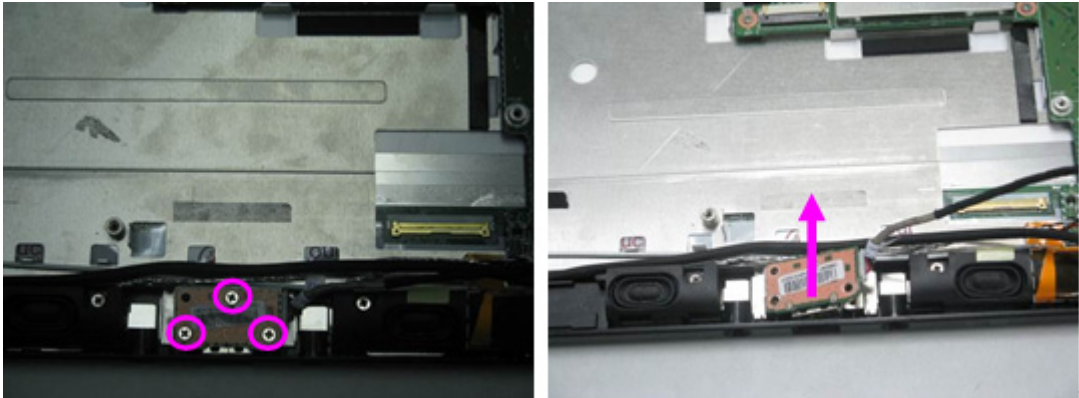


Figure 3-9. Mini Card

Table 3-3. Screw List

Step	Screw	Quantity	Part No.
Mini Card Disassembly	M2*4L (K)	6	86.L080U.002

Removing the 3G Module

1. Remove 1 screw (M2*4L) on 3G Card, unplug antennas, take the 3G Card away.

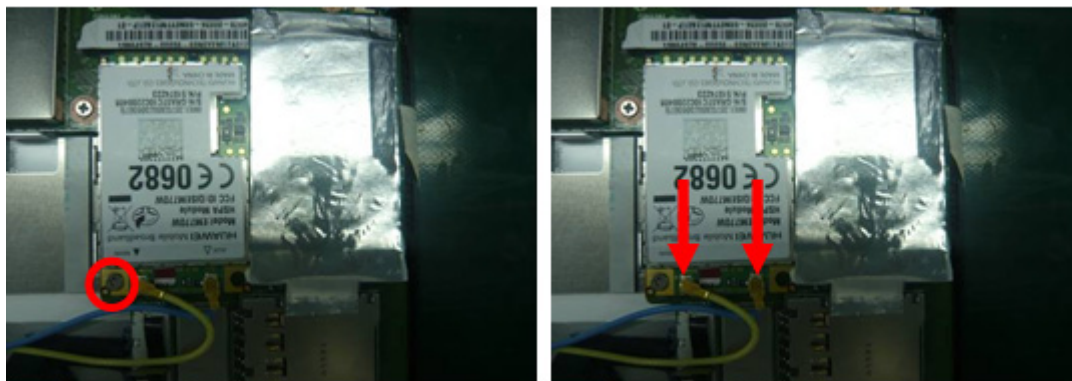


Figure 3-10. 3G Module

Table 3-4. Screw List

Step	Screw	Quantity	Part No.
3G Card Disassembly	M2*4L (K)	1	86.L080U.002

Removing SSD Card Module

1. Remove 1 screw (M2*4L) and take the SSD Card away.

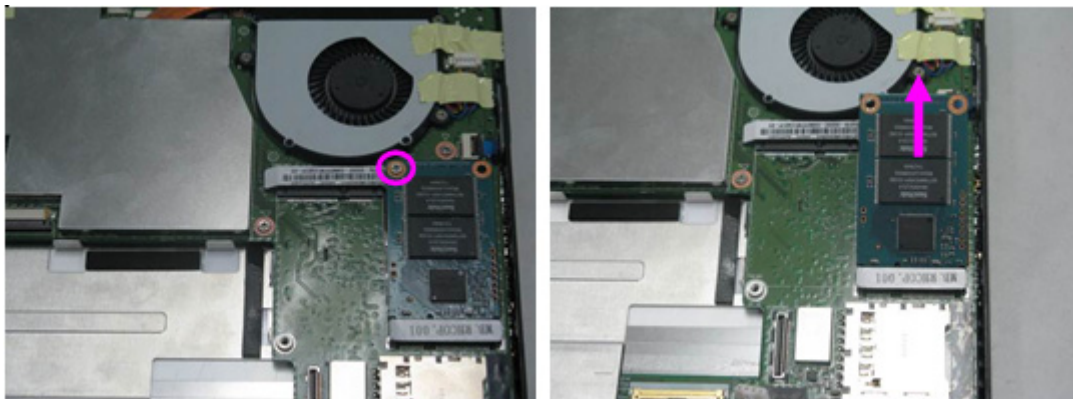


Figure 3-11. SSD Card Module

Table 3-5. Screw List

Step	Screw	Quantity	Part No.
SSD Card Disassembly	M2*4L (K)	1	86.L080U.002

Removing the Thermal Module

1. Remove **3 screws (M2*4L)**, Disconnect the Fan Cable on M/B CONN. And remove the CPU shielding.

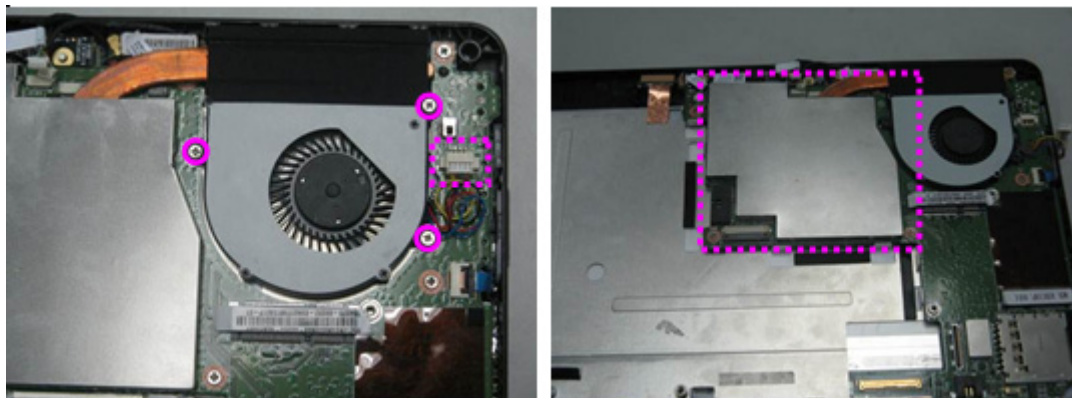


Figure 3-12. Thermal Module

2. Loosen the 3 captive screws. then take the thermal module away.

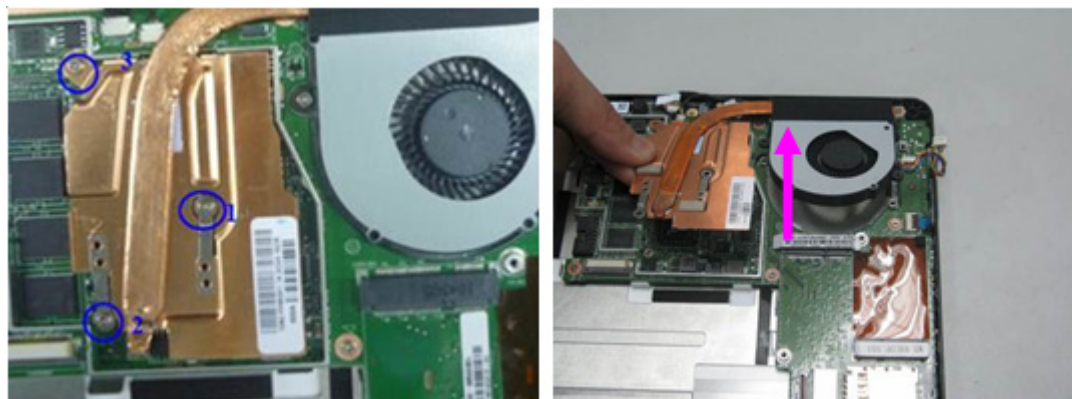


Figure 3-13. Thermal Module

Table 3-6. Screw List

Step	Screw	Quantity	Part No.
Thermal Module Disassembly	M2*4L (K)	3	86.L080U.002

Removing the Camera Module (on Pad Cover side)

1. Disconnect the **CCD Cable**, take the **Camera** and CCD cable way.

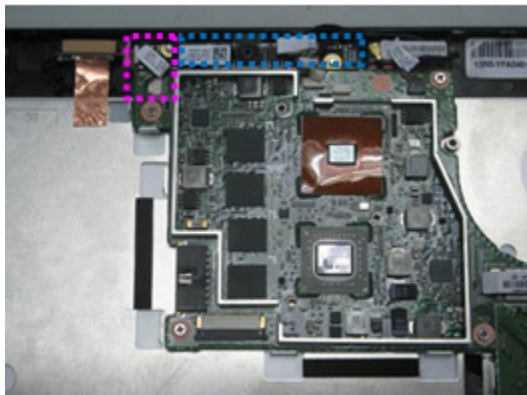


Figure 3-14. Camera Module

Removing the Motherboard Module

1. Disconnect the **CCD Cable**, **Mic Cable**, **GPS BD Cable**, **Touch BD FFC CONN.**



Figure 3-15. Motherboard Module

2. Remove **7 screws (M2*4L)** on motherboard, and then take the motherboard away.

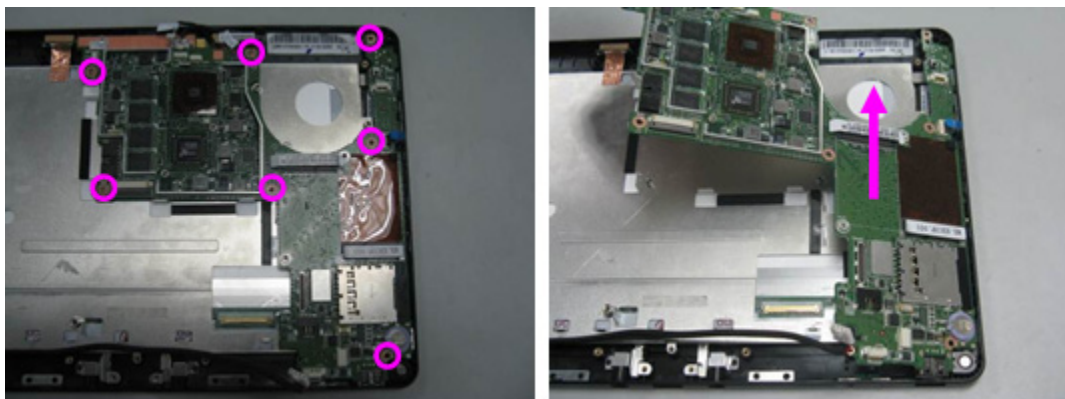


Figure 3-16. Motherboard Module

Table 3-7. Screw List

Step	Screw	Quantity	Part No.
MotherBoard Disassembly	M2*4L (K)	7	86.L080U.002

Removing the LCD Bracket Module

1. Remove **7 screws (M2*3L)** on LCD panel bracket. And take the LCD panel bracket away from LCD bezel.

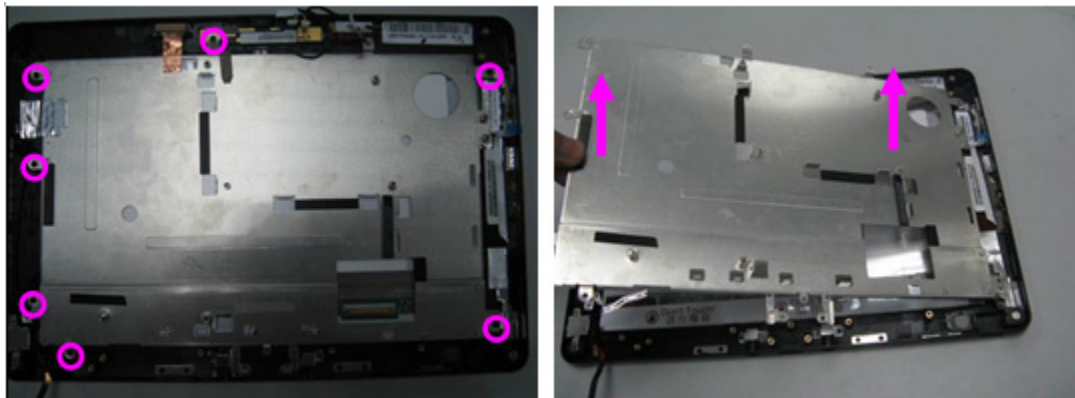


Figure 3-17. LCD Bracket Module

Step	Screw	Quantity	Part No.
LCD Panel Bracket Disassembly	M2*3L (K)	7	86.L080U.001

Removing the Camera Module (on pad bezel side)

1. Remove **1 screw (M2*4L)**, disconnect the CCD Cable and then take the camera away.



Figure 3-18. Camera Module

Table 3-8. Screw List

Step	Screw	Quantity	Part No.
Camera (Bezel) Disassembly	M2*4L (K)	1	86.L080U.002

Docking Module Disassembly Process

Docking Module Disassembly Flowchart

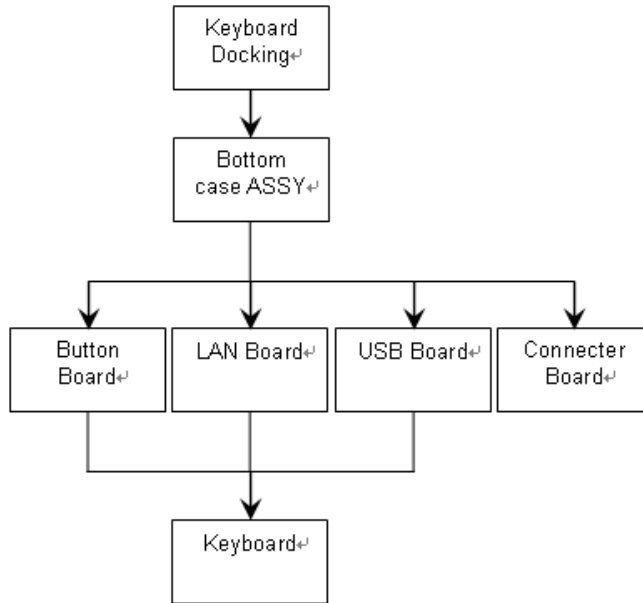


Figure 3-19. Main Unit Disassembly Flowchart

Table 3-9. Screws

Step	Screw	Quantity	Part No.
K/B Bracket Disassembly	M2*4L (K)	2	86.L080U.002
	M1.4*3L (K)	9	86.L080U.003
	M2*3L (K)	2	86.L080U.001
USB Board Disassembly	M2*4L (K)	2	86.L080U.002
LAN Board Disassembly	M2*4L (K)	1	86.L080U.002
Top Case Disassembly	M2*4L (K)	4	86.L080U.002
Connector BD Disassembly	M2*3L (K)	3	86.L080U.001

Removing the Top case

1. Open holder cover and remove **4 screws (M2*4L)**, unlock upside hooks first, unlock the right side and left side hooks, then unlock downside hooks. Take the top case away.



Figure 3-20. Screws on Lower Cover

Table 3-10. Screw List

Step	Screw	Quantity	Part No.
Top Case Disassembly	M2*4L (K)	4	86.L080U.002

Removing the USB Cable

1. Disconnect the **USB Cable CONN** and take the **USB Cable** away.

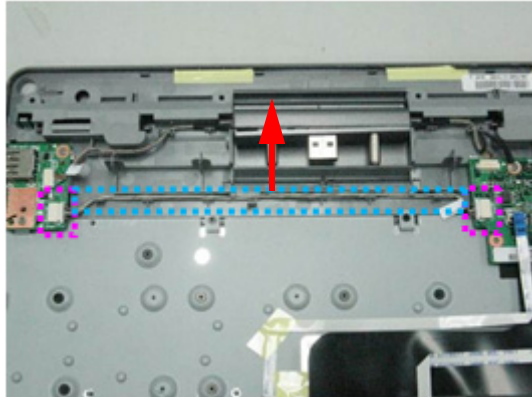


Figure 3-21. USB Cable

Removing the LAN Board

1. Disconnect the **K/B LED Board Cable**, **button Board Cable**, Disconnect the **Connector Cable** and remove **1 screw (M2*4L)**.



Figure 3-22. LAN Board

2. Tear up the tape, disconnect the K/B FFC and take the LAN Board away.

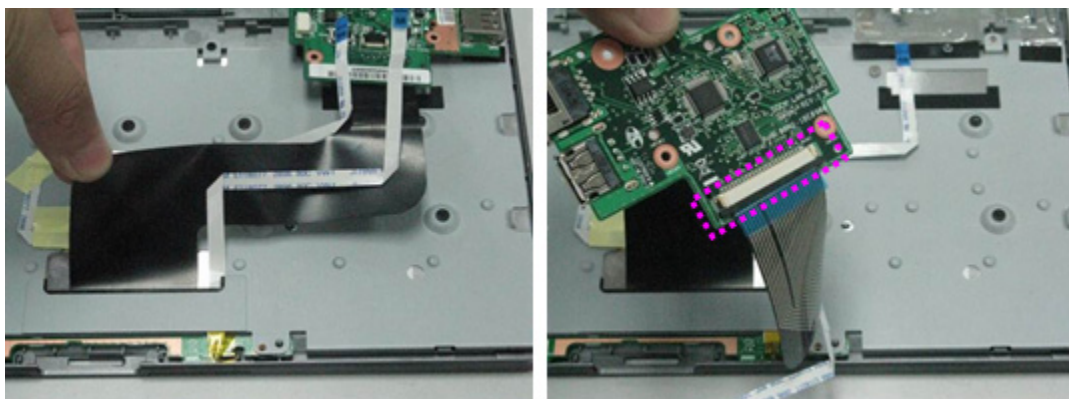


Figure 3-23. LAN Board

Table 3-11. Screw List

Step	Screw	Quantity	Part No.
LAN Board Disassembly	M2*4L (K)	1	86.L080U.002

Removing the USB Board

1. Disconnect the Connector Cable and remove **2 screws (M2*4L)**. Then take the USB Board away.

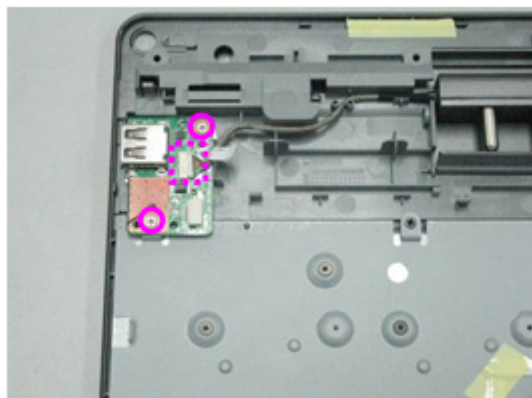


Figure 3-24. USB Board

Table 3-12. Screw List

Step	Screw	Quantity	Part No.
USB Board Disassembly	M2*4L (K)	2	86.L080U.002

Removing the K/B Bracket

1. Remove **2 screws (M2*3L) fixed button BD**, Remove **9 screws (M1.4*3L)** on K/B
2. Bracket.Remove **2 screws (M2*4L)** on upside of K/B Bracket and remove K/B Bracket.

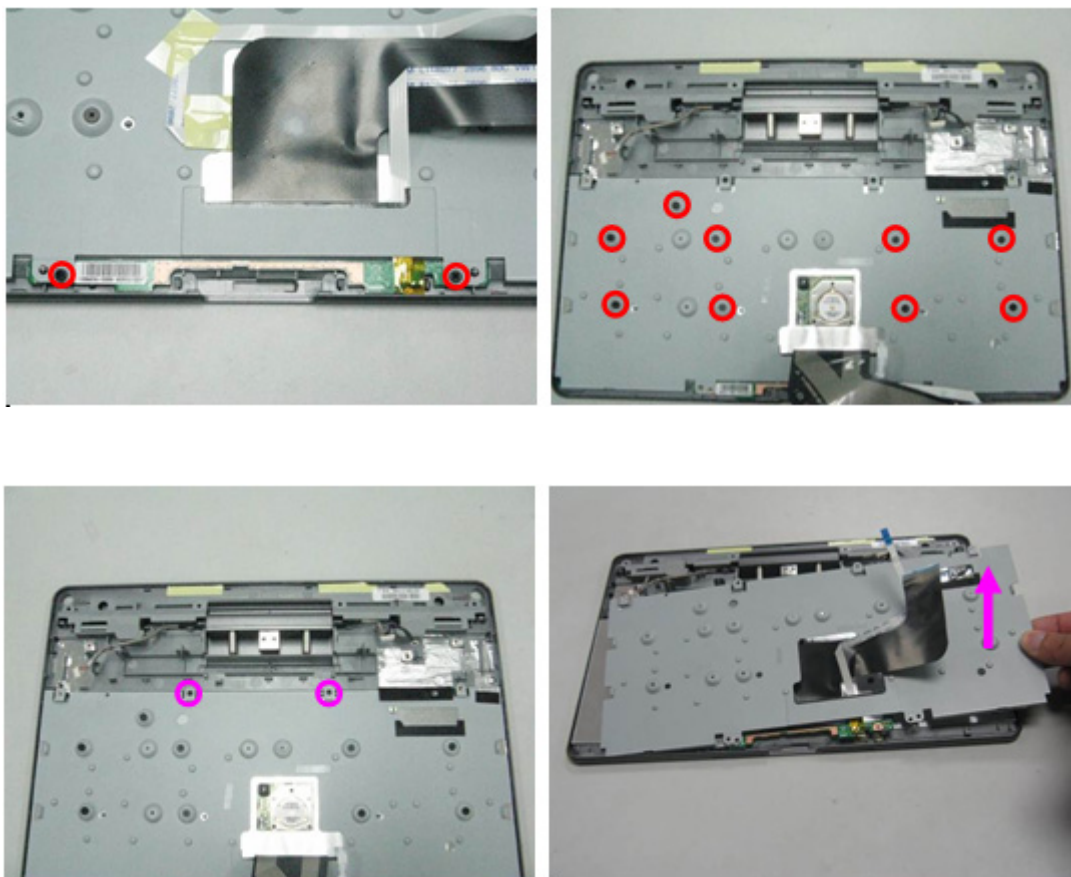


Figure 3-25. K/B Bracket

Table 3-13. Screw List

Step	Screw	Quantity	Part No.
K/B Bracket Disassembly	M2*4L (K)	2	86.L080U.002
K/B Bracket Disassembly	M2*3L (K)	2	86.L080U.001
K/B Bracket Disassembly	M1.4*3L (K)	9	86.L080U.003

Removing Button Board & Keyboard

1. Refer to [Removing the Top case](#).
2. Locate the front speaker cable on the mainboard.

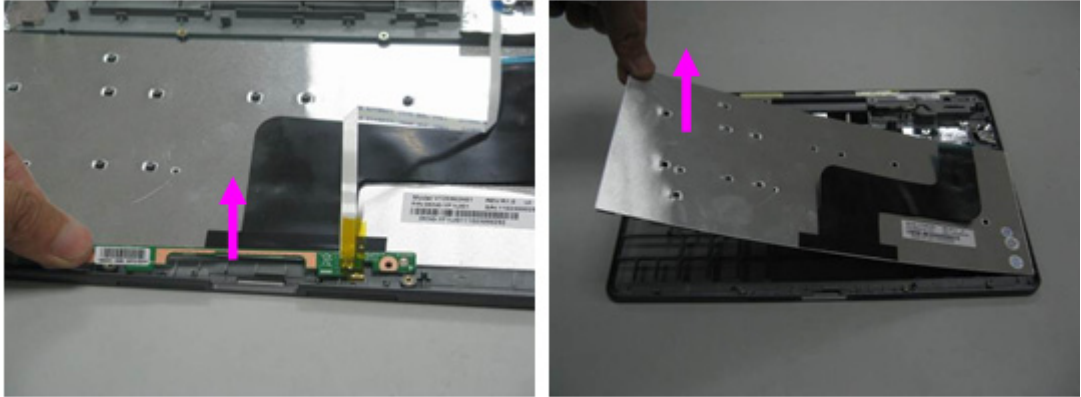


Figure 3-26. Button Board & Keyboard

Removing the Connector Board

1. Take the Connector Board Cover away and remove 3 screws (M2*3L) and Connector Board Bracket. Then you can find Connector Board.

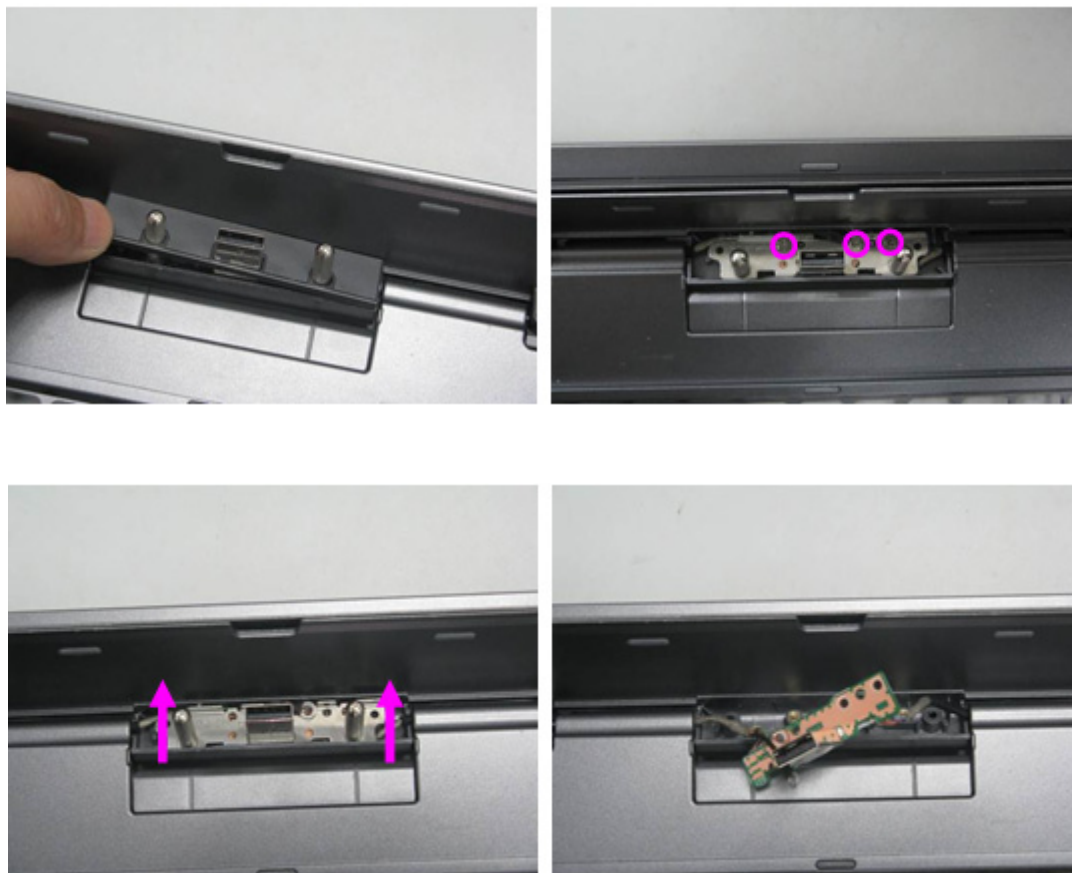


Figure 3-27. Connector Board

Table 3-14. Screw List

Step	Screw	Quantity	Part No.
Connector BD Disassembly	M2*3L (K)	3	86.L080U.001

Main Unit Reassembly Procedure

Replacing the Camera Module(on Pad Bezel side)

1. Stick the CCD Cable into the CCD CONN. Assemble the Camera into the Touch panel Bezel case Assy. Screw **1 screw (M2*4L)** to fix the Camera.



Figure 3-28. Camera Module

Table 3-15. Screw List

Step	Screw	Quantity	Part No.
Camera (Bezel) Disassembly	M2*4L (K)	1	86.L080U.002

Replacing the LCD Bracket Module

1. Install the panel bracket and secure **7 screws (M2*3L)** on two LCD bracket.

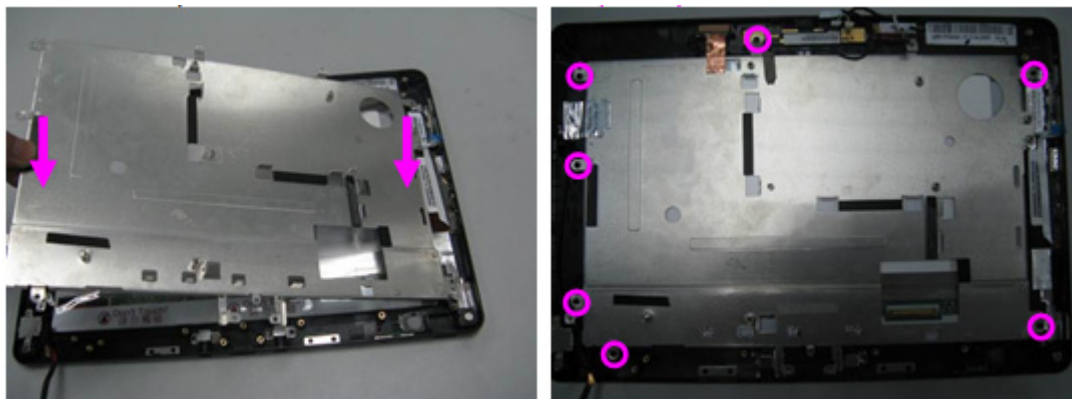


Figure 3-29. LCD Bracket Module

2. Cable and antenna should press in the line channel.

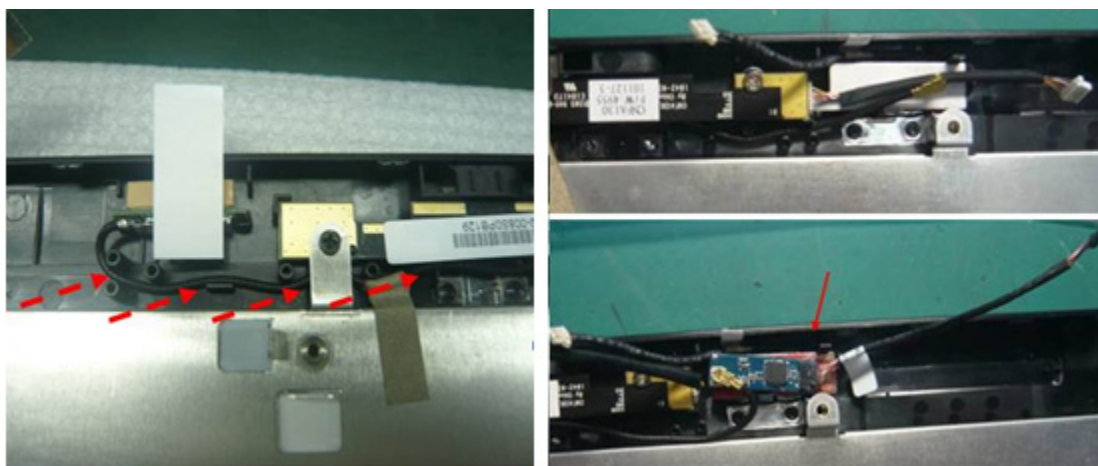


Figure 3-30. LCD Bracket Module

Table 3-16. Screw List

Step	Screw	Quantity	Part No.
LCD Panel Bracket Disassembly	M2*3L (K)	7	86.L080U.001

Replacing the Mother Board Module

1. Assemble MB into Pad Bezel in 30 angle on target to CONN of the Bezel, and make sure screw holes must be targeted to BOSS. And secure **7 screws (M2*4L)** on the Motherboard.

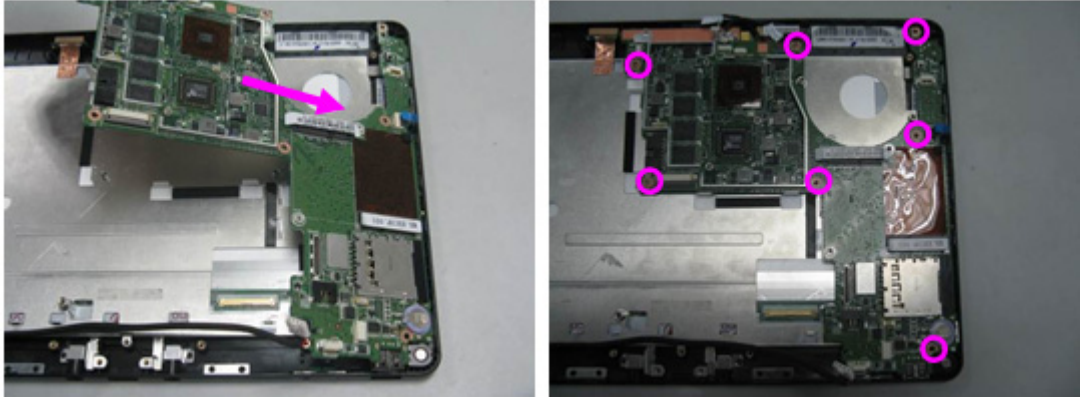


Figure 3-31. Mother Board Module

2. Connect the **CCD Cable**, **Mic Cable**, **GPS BD Cable**, **Touch BD FFC CONN**.



Figure 3-32. Mother Board Module

Table 3-17. Screw List

Step	Screw	Quantity	Part No.
MotherBoard Disassembly	M2*4L (K)	7	86.L080U.002

Replacing the Camera Module (on Pad Cover side)

1. Stick the **CCD Cable** into the CCD CONN. Assemble **the Camera** into the Touch panel Bezel case Assy.

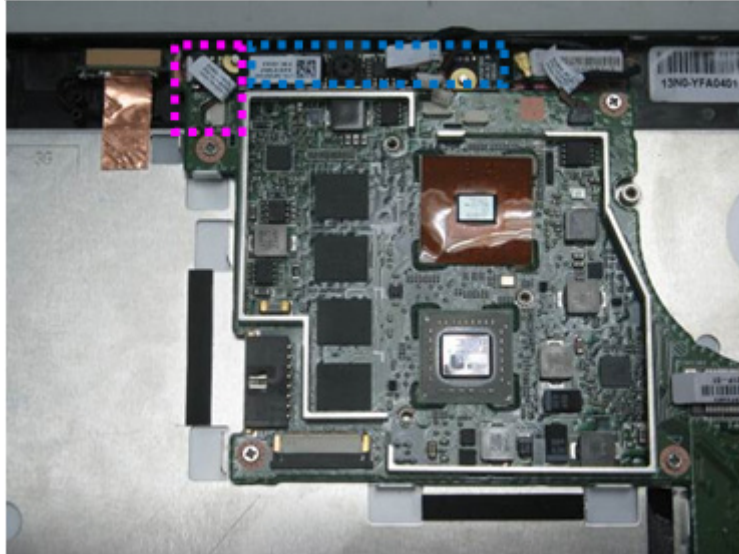


Figure 3-33. Camera Module

Replacing the Thermal Module

1. Assemble Fan Module into Bezel Assy. And secure **3 captive screws** to fix it.

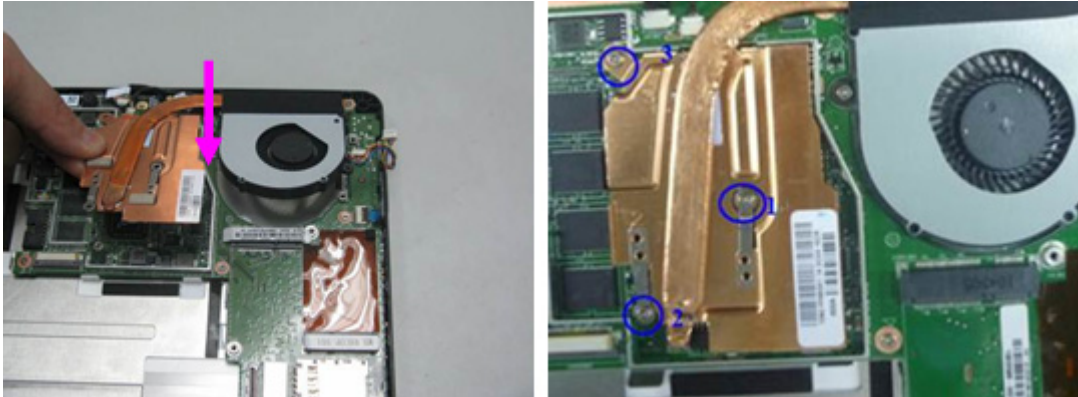


Figure 3-34. Thermal Module

2. Assemble the CPU shielding. Secure **3 screws (M2*4L)**, connect the Fan Cable on M/B CONN.

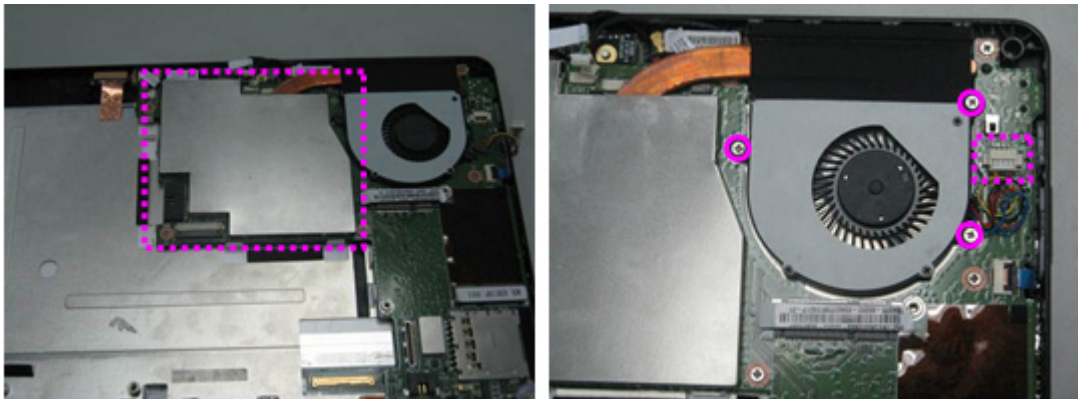


Figure 3-35. Thermal Module

Table 3-18. Screw List

Step	Screw	Quantity	Part No.
Thermal Module Disassembly	M2*4L (K)	3	86.L080U.002

Replacing SSD Card Module

1. Assemble SSD Card into the socket of M/B in 30 to 45 angle, Make sure it was assembled in correct position. Screw **1 screw (M2*4L)** to fix SSD Card into MB in sequence.

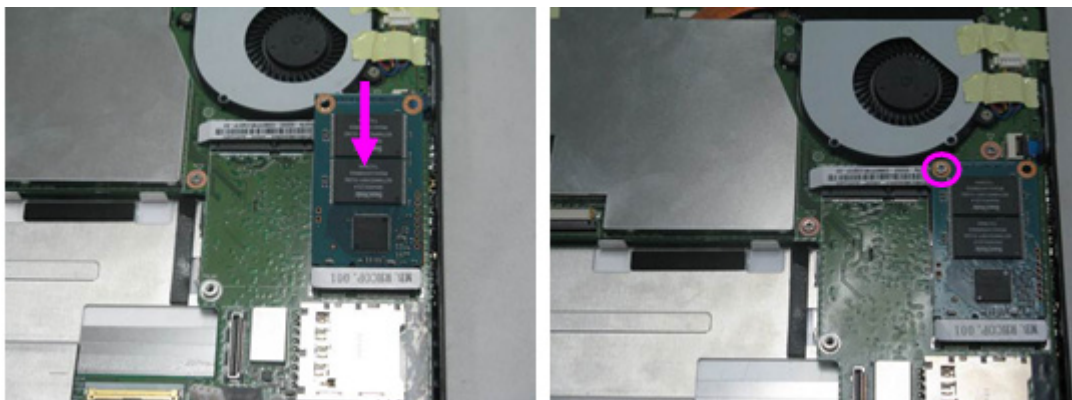


Figure 3-36. SSD Card Module

Table 3-19. Screw List

Step	Screw	Quantity	Part No.
SSD Card Disassembly	M2*4L (K)	1	86.L080U.002

Replacing 3G Module

1. Assemble 3G Card into the socket, plug antennas, screw **1 screw (M2*4L)** to fix SSD Card.



Figure 3-37. 3G Module

Table 3-20. Screw List

Step	Screw	Quantity	Part No.
3G Card Disassembly	M2*4L (K)	1	86.L080U.002

Replacing Mini Card Module

1. Assemble USB Card into Bezel Assy. And secure **3 screws (M2*4L)** to fix it.

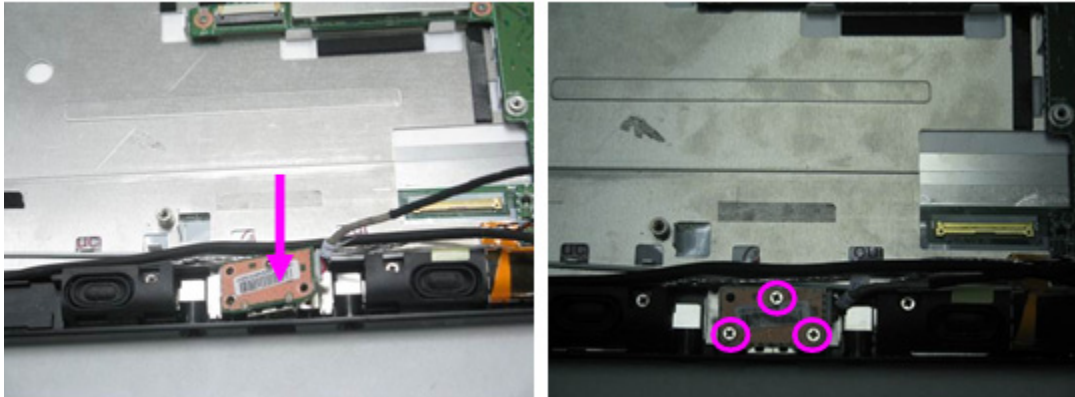


Figure 3-38. Mini Card Module

2. Plug WLAN antennas. Connect WLAN to LAN Board.

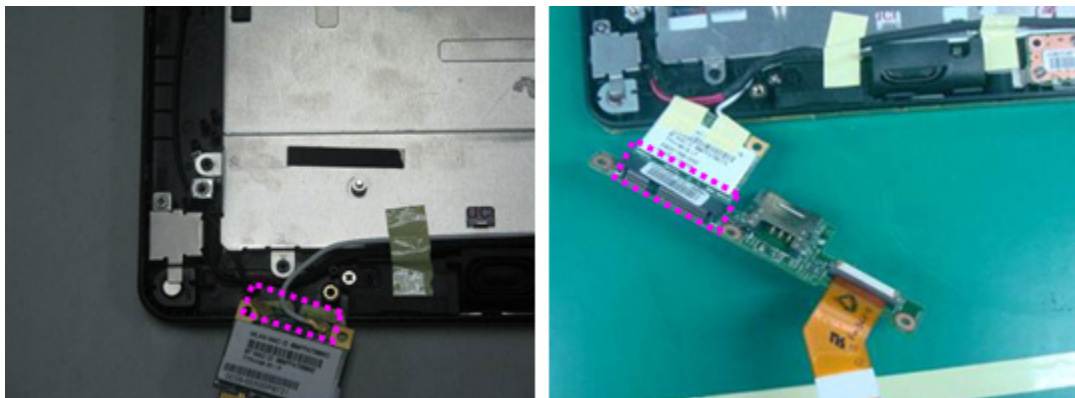


Figure 3-39. Mini Card Module

3. Assemble Mini Card into Bezel Assy connect the Mini Board Cable. And secure **3 screws (M2*4L)** to fix it.

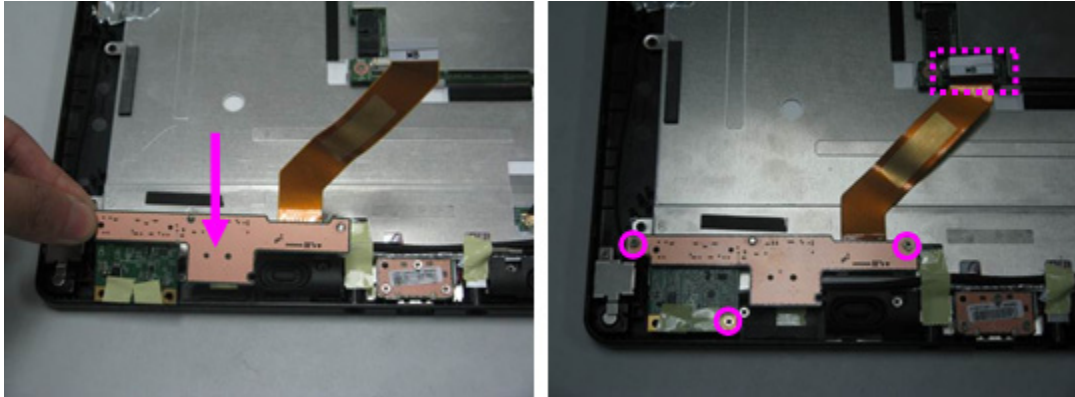


Figure 3-40. Mini Card Module

4. Bond the Mylar on the Mini Board.

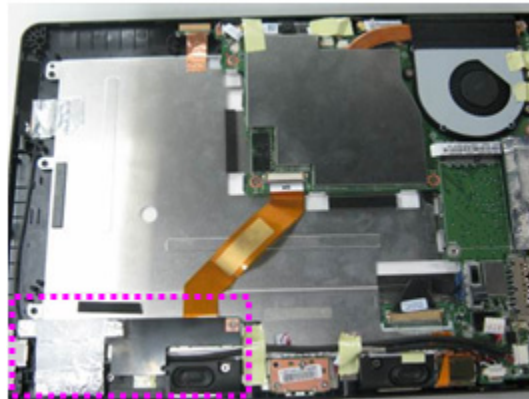


Figure 3-41. Mini Card Module

5. Connect the **LVDS cable**, **Speaker Cable**, **USB BD Cable**, **DC-IN Cable** to MB.

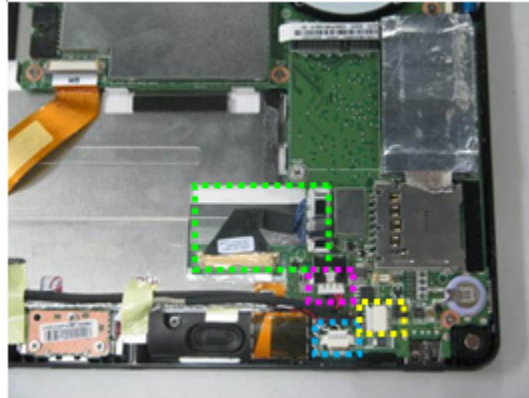


Figure 3-42. Mini Card Module

Table 3-21. Screw List

Step	Screw	Quantity	Part No.
Mini Card Disassembly	M2*4L (K)	6	86.L080U.002

Replacing the Battery Module

1. Insert the battery Cable CONN into the MB CONN. Assemble the battery into the bottom case as the picture show.



Figure 3-43. Battery Module

Replacing the Pad Cover Module

1. Take the Pad cover, Lock the hooks in the order.



Figure 3-44. Pad Cover Module

Docking Module Reassembly Process

Replacing the Connector Board

1. Put the CONNECTOR BD Cable and Ground Cable on the Top case..

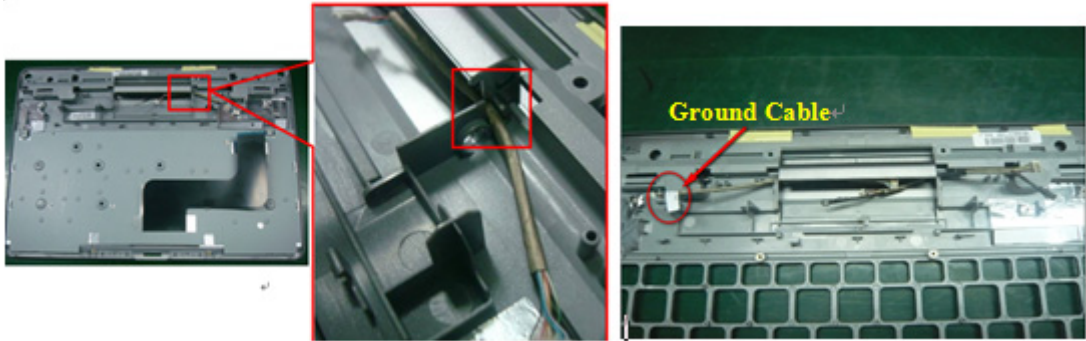


Figure 3-45. Connector Board

2. Connect the cables to CONNECTOR BD CONN. Assemble the Connector Board Bracket, and secure **3 screws (M2*3L)** to fix it. Assemble the Connector Board Cover.

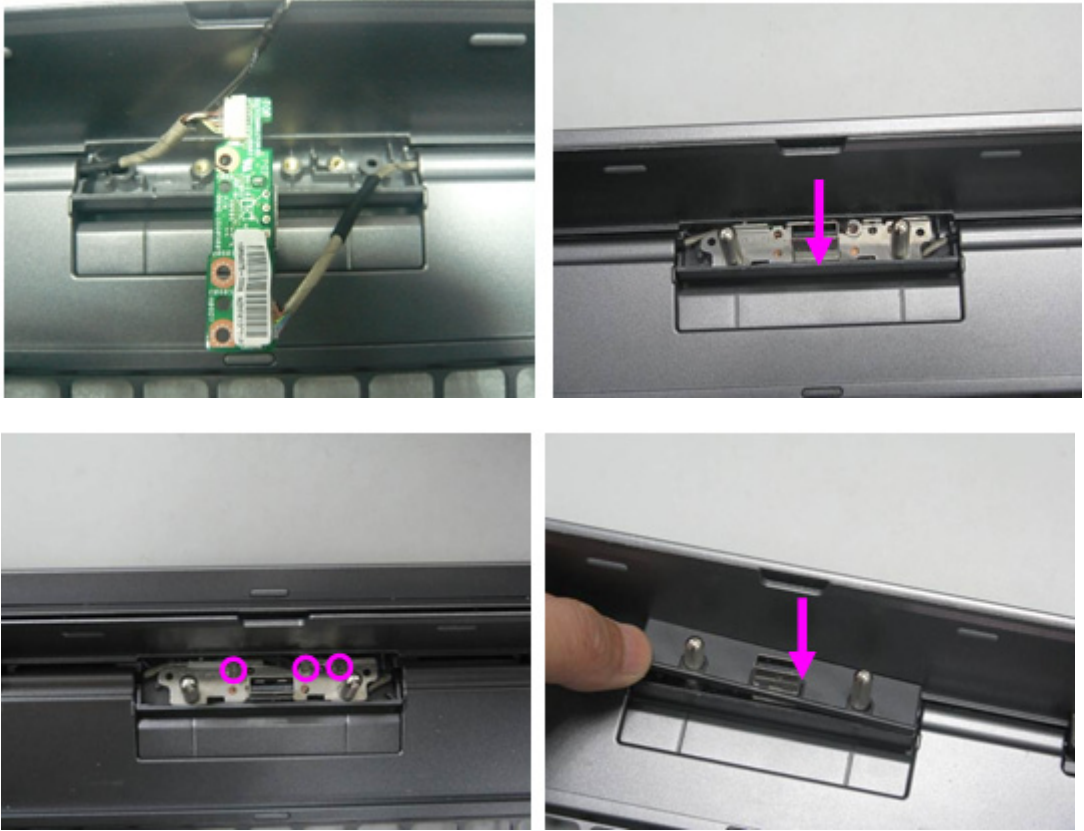


Figure 3-46. Connector Board

Table 3-22. Screw List

Step	Screw	Quantity	Part No.
Connector BD Disassembly	M2*3L (K)	3	86.L080U.001

Replacing Button Board & Keyboard

1. Assemble the Keyboard and Button Board.

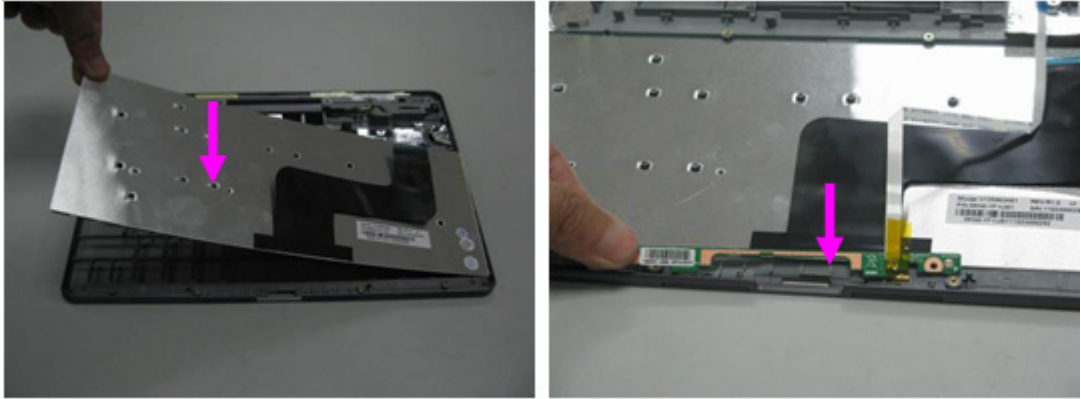


Figure 3-47. Button Board & Keyboard

Replacing the K/B Bracket

1. Assemble the K/B Bracket, make sure pull the K/B FFC through the K/B Bracket. And secure **2 screws (M2*4L)** on upside of K/B Bracket to fix it.

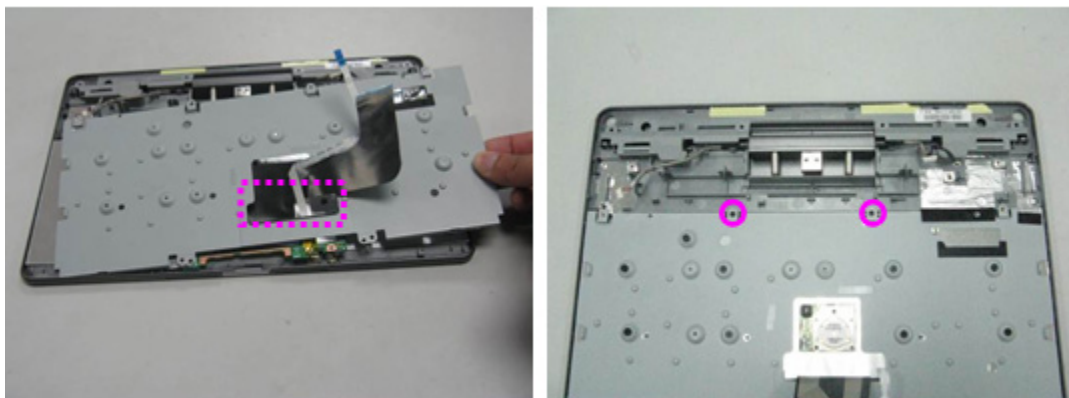


Figure 3-48. K/B Bracket

2. Secure **2 screws (M2*3L)** fixed button BD, secure **9 screws (M1.4*2.8L)** on K/B Bracket.

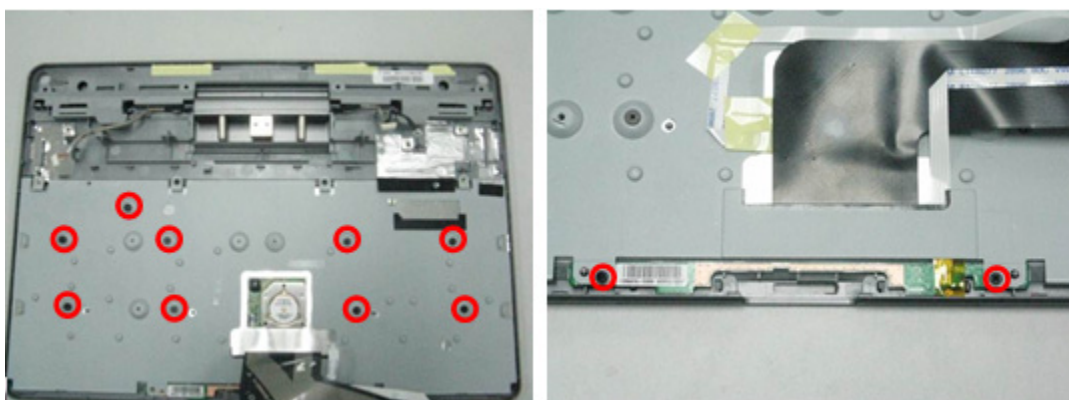


Figure 3-49. K/B Bracket

Table 3-23. Screw List

Step	Screw	Quantity	Part No.
K/B Bracket Disassembly	M2*4L (K)	2	86.L080U.002
K/B Bracket Disassembly	M2*3L (K)	2	86.L080U.001
K/B Bracket Disassembly	M1.4*3L (K)	9	86.L080U.003

Replacing the USB Board

1. Assemble the USB Board, connect the Connector Cable and secure **2 screws (M2*4L)**.

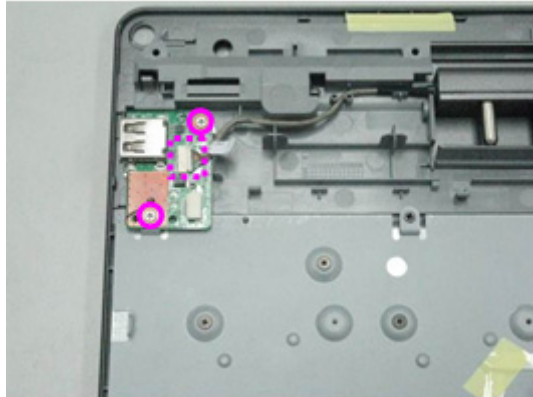


Figure 3-50. USB Board

Table 3-24. Screw List

Step	Screw	Quantity	Part No.
USB Board Disassembly	M2*4L (K)	2	86.L080U.002

Replacing the LAN Board

1. Connect the K/B FFC to LAN Board, Assemble the LAN Board. Connect the **K/B LED Board Cable**, **button Board Cable**, connect the **Connector Cable** and secure **1 screw (M2*4L)**.

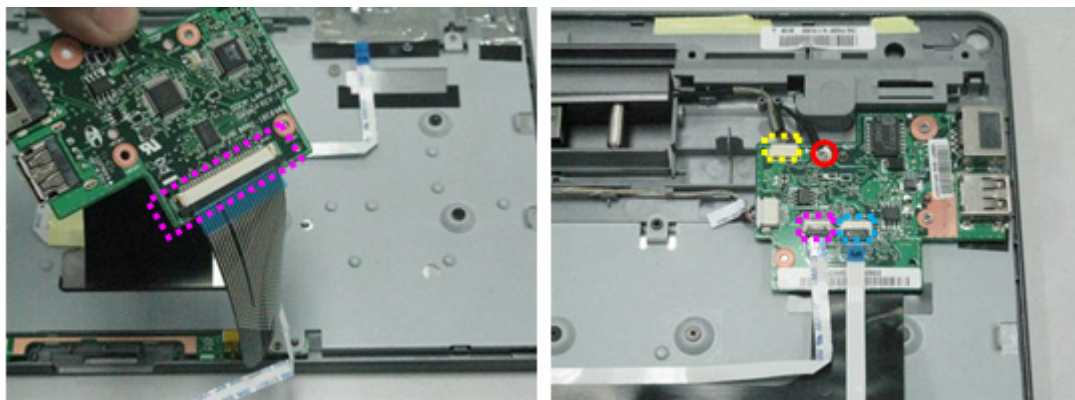


Figure 3-51. LAN Board

Table 3-25. Screw List

Step	Screw	Quantity	Part No.
LAN Board Disassembly	M2*4L (K)	1	86.L080U.002

Replacing the USB Cable

1. Assemble USB Cable and connect to the USB Board and LAN Board.

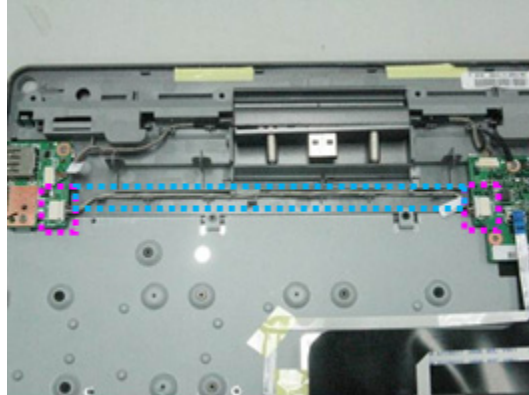


Figure 3-52. USB Cable

Replacing the Top Case Module

1. Assemble the Top case, lock the hooks in the order.



Figure 3-53. Top Case Module

2. Open holder cover and secure **4 screws (M2*4L)**.



Figure 3-54. Top Case Module

Table 3-26. Screw List

Step	Screw	Quantity	Part No.
Top Case Disassembly	M2*4L (K)	4	86.L080U.002

CHAPTER 4

Troubleshooting

Introduction	4-1
General Information	4-1
Power On Issues	4-2
No Display Issues	4-3
LCD Failure	4-5
Touch Panel Failure	4-6
Internal Speaker Failure	4-7
Microphone Failure	4-9
USB Failure	4-10
WLAN Failure	4-11
Bluetooth Failure	4-12
3G Failure(Only for 3G Function SKU)	4-13
Card Reader Failure	4-14
Thermal Unit Failure	4-15
LAN Unit Failure	4-16
Keyboard Failure	4-17
Other Functions Failure	4-18
Intermittent Problems	4-18
Undetermined Problems	4-18
Post Codes	4-19
POST Code Range	4-19

Troubleshooting

Introduction

This chapter contains information about troubleshooting common problems associated with the ICONIA Tab W500.

General Information

The following procedures are a guide for troubleshooting computer problems. The step by step procedures are designed to be performed as described.

⇒ **NOTE:**

The diagnostic tests are intended for Acer products only. Non-Acer products, prototype cards, or modified options can give false errors and invalid system responses.

1. Obtain as much detailed information as possible about the problem.
2. If possible, verify the symptoms by re-creating the failure through diagnostic tests or repeating the operation that led to the problem.
3. Use Table 4-1 with the verified symptom to determine the solution.

Table 4-1. Common Problems

Symptoms (Verified)
Power On Issues
No Display Issues
LCD Failure
Touch Panel Failure
Internal Speaker Failure
Microphone Failure
USB Failure
WLAN Failure
Bluetooth Failure
3G Failure(Only for 3G Function SKU)
Card Reader Failure
Thermal Unit Failure
LAN Unit Failure
Keyboard Failure
Other Functions Failure
Intermittent Problems
Undetermined Problems

4. If the Issue is still not resolved, refer to [Online Support Information](#).

Power On Issues

If the system does not power on, perform the following, one at a time, to correct the problem. Do not replace a non-defective FRU:

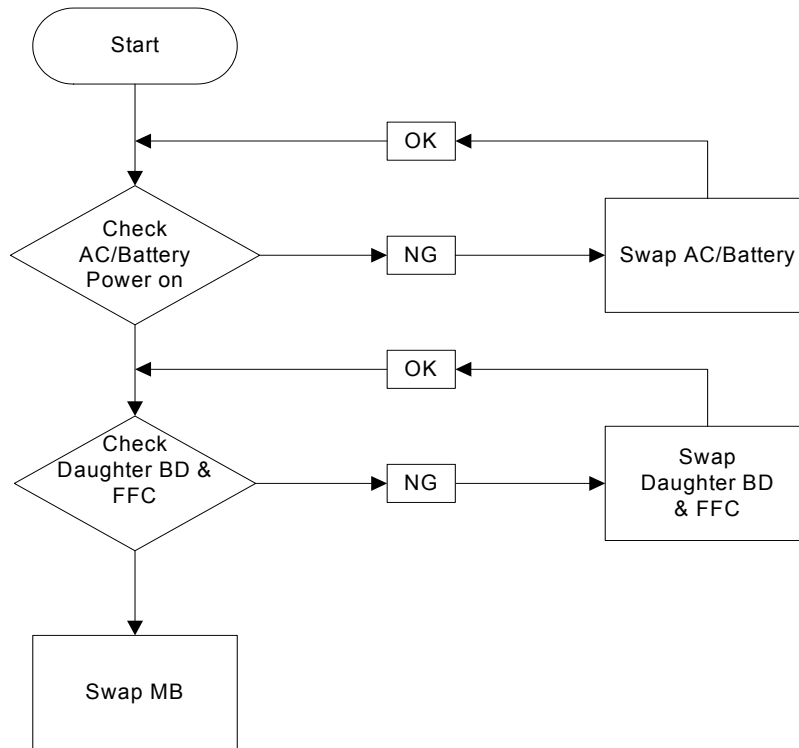


Figure 4-1. Power On Issue

Computer Shuts Down Intermittently

If the system powers off at intervals, perform the following.

1. Make sure the power cable is properly connected to the computer and the electrical outlet.
2. Remove all extension cables between the computer and the outlet.
3. Remove all surge protectors between the computer and the electrical outlet. Plug the computer directly into a known serviceable electrical outlet.
4. Disconnect the power and open the casing to check the Thermal Unit (refer to Thermal Unit Failure) and fan airways are free of obstructions.
5. Remove all external and non-essential hardware connected to the computer that are not necessary to boot the computer to the failure point.
6. Remove any recently installed software.
7. If the Issue is still not resolved, refer to [Online Support Information](#).

No Display Issues

If the Display does not work, perform the following, one at a time. Do not replace a non-defective FRU:

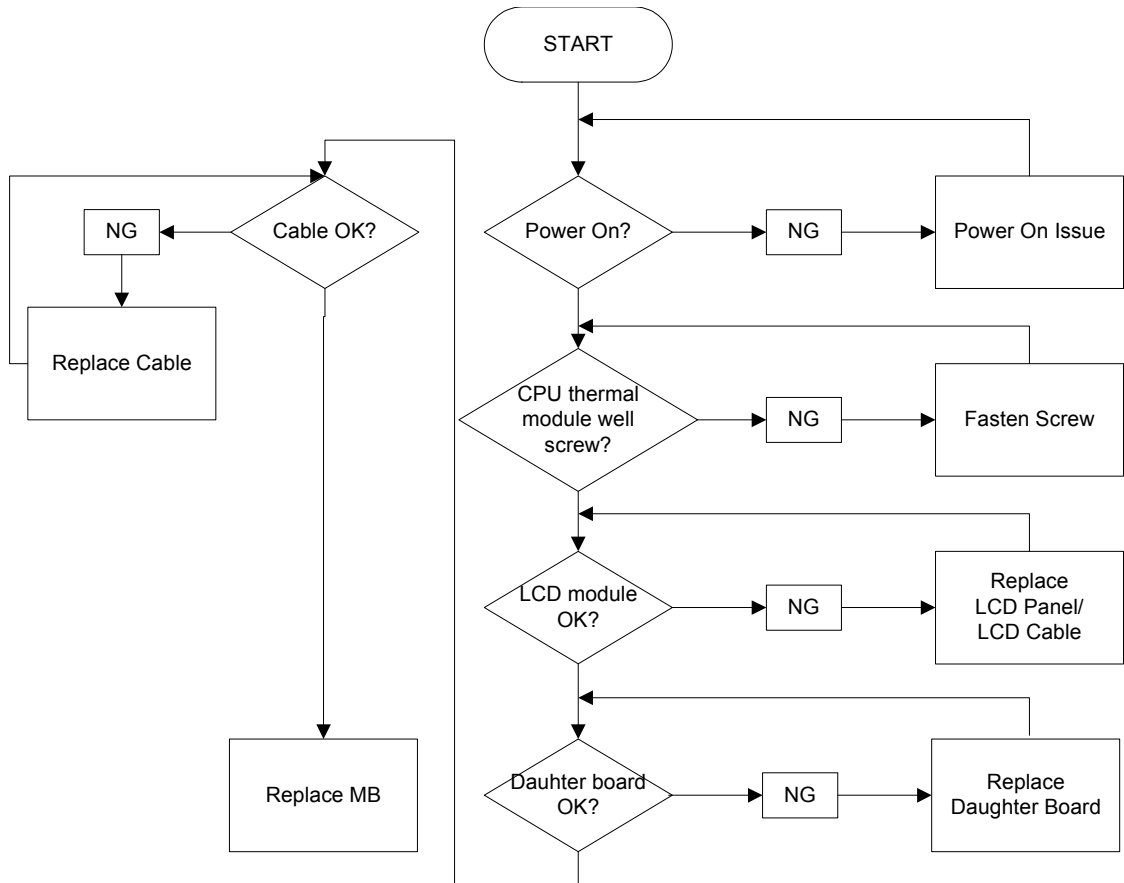


Figure 4-2. No Display Issue

No POST or Video

If the POST or video does not appear, perform the following, one at a time.

1. Make sure that internal display is selected. Switching between internal and external by pressing **Fn+F5**. Reference Product pages for specific model procedures.
2. Make sure the computer has power by checking for one of the following:

- Fans start up
- Status LEDs illuminate

If no power, refer to [Power On Issues](#).

3. Drain stored power by removing the power cable and battery. Hold the power button for 10 seconds. Connect the power and reboot the computer.
4. Connect an external monitor to the computer and switch between the internal display and the external display is by pressing **Fn+F5**.

5. If the POST or video appears on the external display only, refer to [LCD Failure](#).
6. Disconnect power and all external devices including port replicators or docking stations. Remove any memory cards and CD/DVD discs.
7. Start the computer. If the computer boots correctly, add the devices one by one until the failure point is discovered.
8. Remove the drives (refer to [Disassembly Process](#)).
9. If the Issue is still not resolved, refer to [Online Support Information](#).

Abnormal Video

If the video appears abnormal, perform the following, one at a time.

1. Boot the computer.
 - If permanent vertical/horizontal lines or dark spots appear in the same location, the LCD is faulty and should be replaced. Refer to [Disassembly Process](#).
 - If extensive pixel damage is present (different colored spots in the same locations on the screen), the LCD is faulty and should be replaced. Refer to [Disassembly Process](#)

⇒ NOTE:

Make sure that the computer is not running on battery alone as this may reduce display brightness.

2. Adjust the brightness to its highest level. Refer to the User Manual for instructions on adjusting the settings. If the display is too dim at the highest brightness setting, the LCD is faulty and should be replaced. Refer to [Disassembly Process](#).
3. Check the display resolution is correctly configured:
 - Minimize or close all Windows.
 - If display size is only abnormal in an application, check the view settings and control/mouse wheel zoom feature in the application.
 - If desktop display resolution is not normal, right-click on the desktop and select *Personalize Display Settings*.
 - Click and drag the Resolution slider to the desired resolution.
 - Click **Apply** and check the display. Readjust if necessary.
4. Roll back the video driver to the previous version if updated.
5. Remove and reinstall the video driver.
6. Check the Device Manager to determine that:
 - The device is properly installed. There are no red Xs or yellow exclamation marks
 - There are no device conflicts
 - No hardware is listed under *Other Devices*
7. If the Issue is still not resolved, refer to [Online Support Information](#).
8. Run the *Windows Memory Diagnostic* from the operating system DVD and follow the on-screen prompts.
9. If the Issue is still not resolved, refer to [Online Support Information](#).

LCD Failure

If the LCD fails, perform the following, one at a time. Do not replace a non-defective FRU:

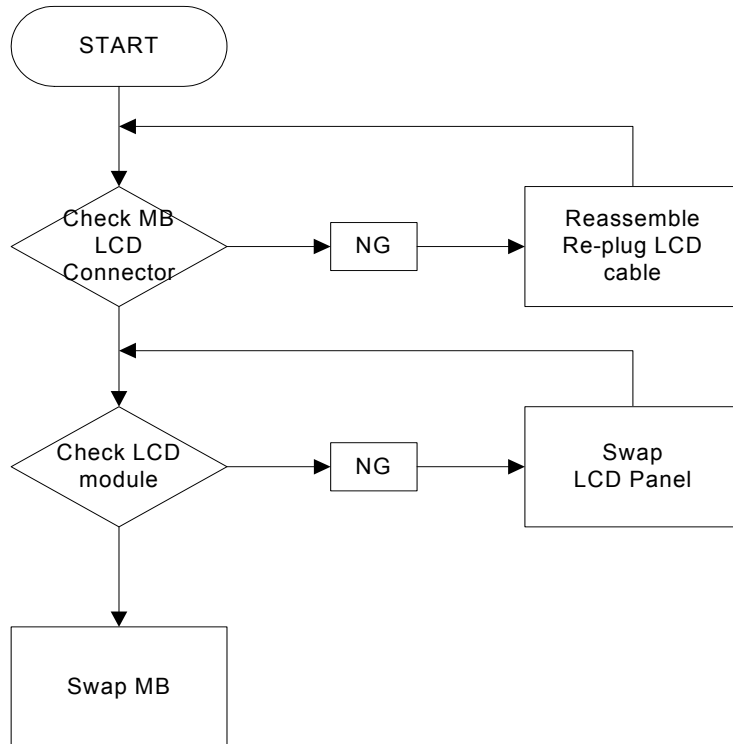


Figure 4-3. LCD Failure

Touch Panel Failure

If the Touch Panel fails, perform the following, one at a time. Do not replace a non-defective FRU:

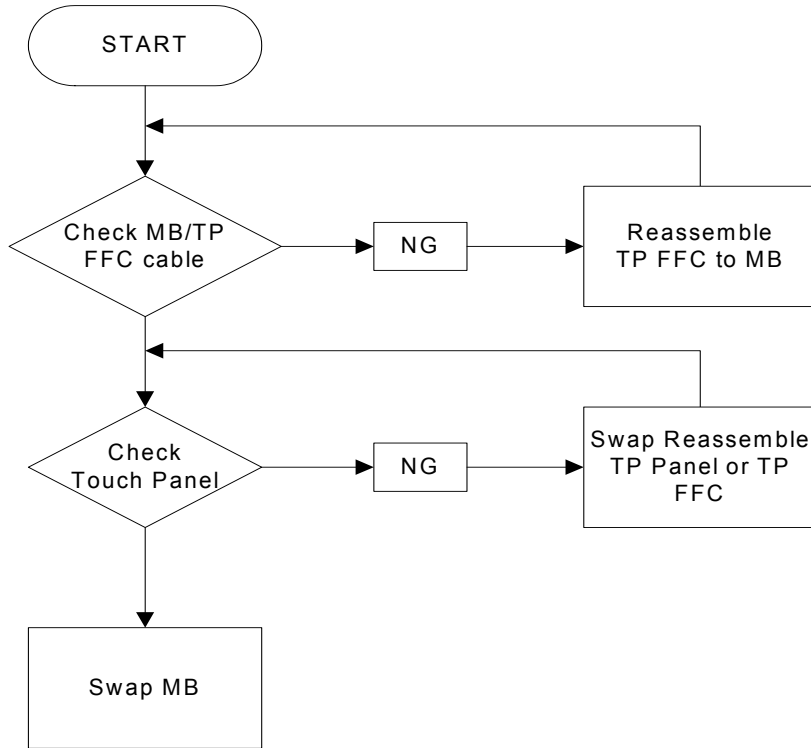


Figure 4-4. Touch Panel Failure

Internal Speaker Failure

If the Internal Speaker fails, perform the following, one at a time. Do not replace a non-defective FRU:

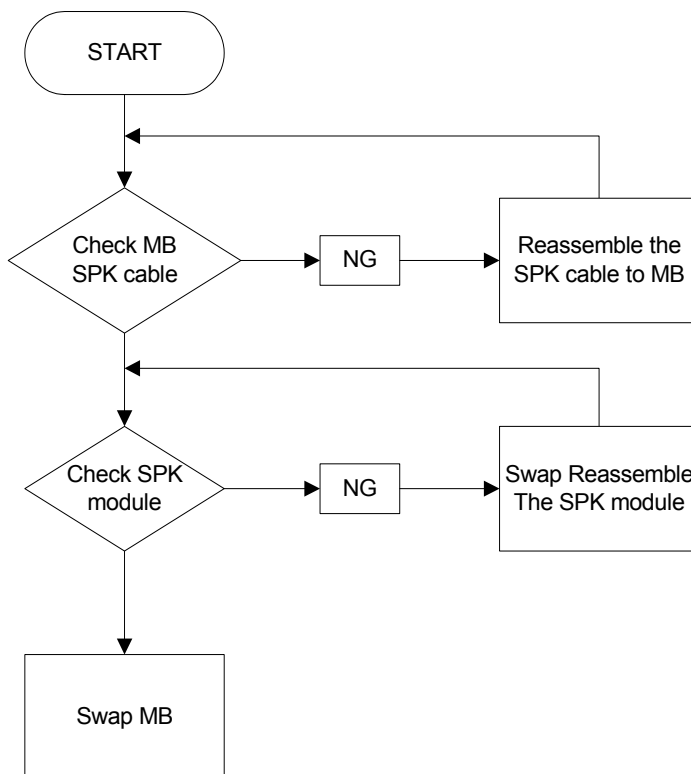


Figure 4-5. Internal Speaker Failure

Sound Problems

Perform the following, one at a time.

1. Boot the computer.
2. Navigate to *Start* → *Control Panel* → *System and Maintenance* → *System* → *Device Manager*. Check the Device Manager to determine that:
 - The device is properly installed
 - There are no red Xs or yellow exclamation marks
 - There are no device conflicts
 - No hardware is listed under Other Devices
3. If updated recently, roll back the audio driver to the previous version.
4. Remove and reinstall the audio driver.
5. Make sure that all volume controls are set mid range:
 - Click the volume icon on the taskbar
 - Drag the slider to 50. Confirm that the volume is not muted.

- Click Mixer to verify that other audio applications are set to 50 and not muted.
6. Navigate to *Start* → *Control Panel* → *Hardware and Sound* → *Sound*. Confirm that *Speakers* are selected as the default audio device (green check mark).

⇒ **NOTE:**

If *Speakers* do not show, right-click on the *Playback* tab and select **Show Disabled Devices** (clear by default).

7. Select *Speakers* and click *Configure* to start *Speaker Setup*. Follow the on-screen prompts to configure the speakers.
8. Remove any recently installed hardware or software.
9. Restore system and file settings from a known good date using *System Restore*.
10. If the issue is remains, repeat step 9, selecting an earlier time and date.
11. Reinstall the Operating System.
12. If the Issue is still not resolved, refer to [Online Support Information](#).

Microphone Failure

If internal or external Microphones fail, perform the following, one at a time.

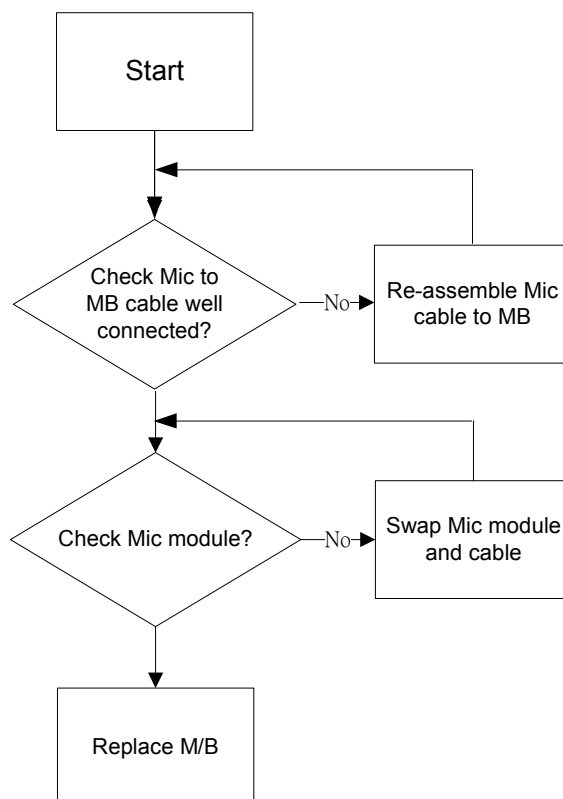


Figure 4-6. Microphone Failure

1. Check that the microphone is enabled. Navigate to *Start* → *Control Panel* → *Hardware and Sound* → *Sound* and select the *Recording* tab.
2. Right click on the *Recording* tab and select *Show Disabled Devices* (clear by default). The microphone appears on the *Recording* tab.
3. Right click on the microphone and select **Enable**.
4. Select the microphone then click **Properties**. Select the **Levels** tab.
5. Increase the volume to the maximum setting and click **OK**.
6. Test the microphone hardware:
 - Select the microphone and click **Configure**.
 - Select **Set up microphone**.
 - Select the microphone type from the list and click **Next**.
 - Follow the on-screen prompts to complete the test.
7. If the Issue is still not resolved, refer to [Online Support Information](#).

USB Failure

If the USB fails, perform the following, one at a time. Do not replace a non-defective FRU:

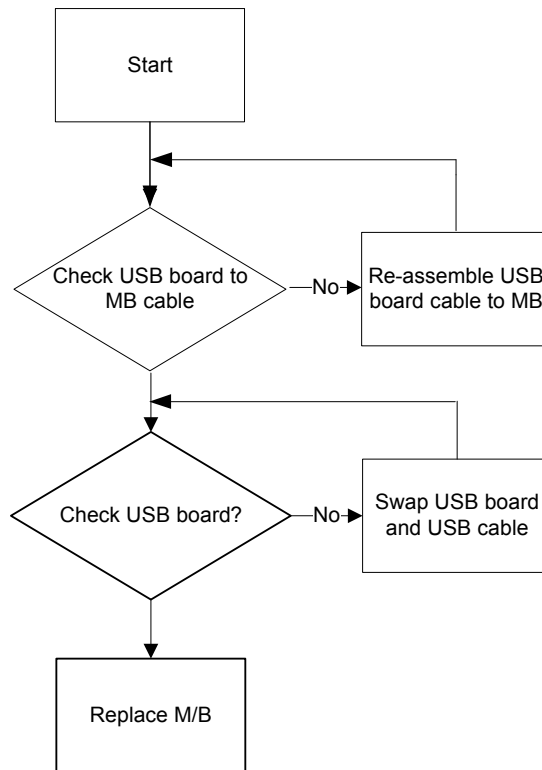


Figure 4-7. USB Failure

WLAN Failure

If the WLAN fails, perform the following, one at a time. Do not replace a non-defective FRU:

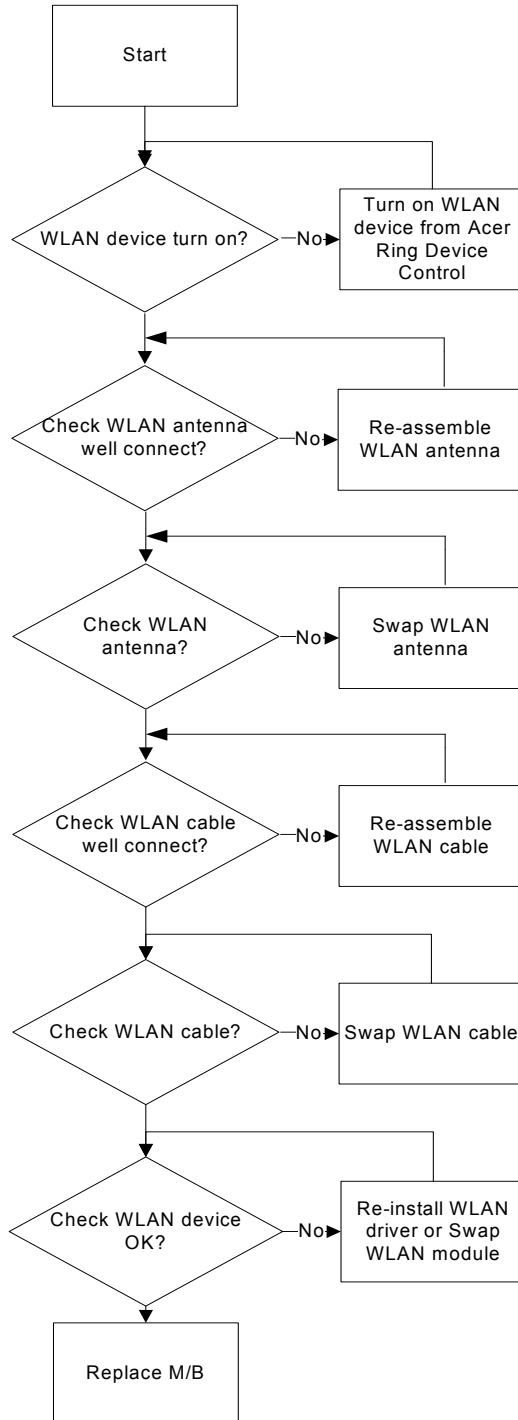


Figure 4-8. WLAN Failure

Bluetooth Failure

If the Bluetooth fails, perform the following, one at a time. Do not replace a non-defective FRU:

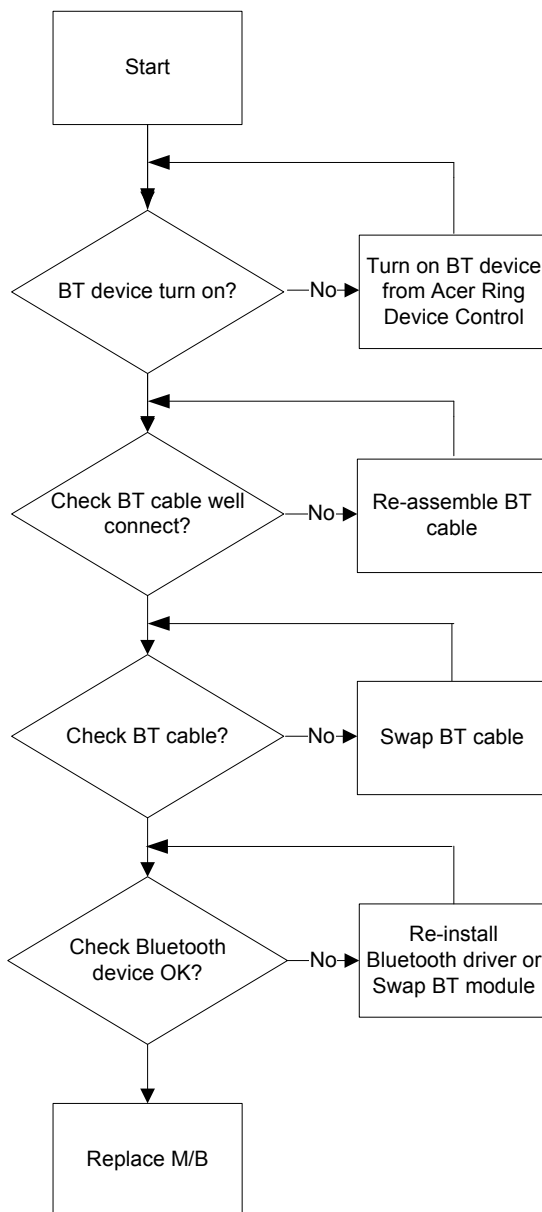


Figure 4-9. Bluetooth Failure

3G Failure(Only for 3G Function SKU)

If the 3G fails, perform the following, one at a time. Do not replace a non-defective FRU:

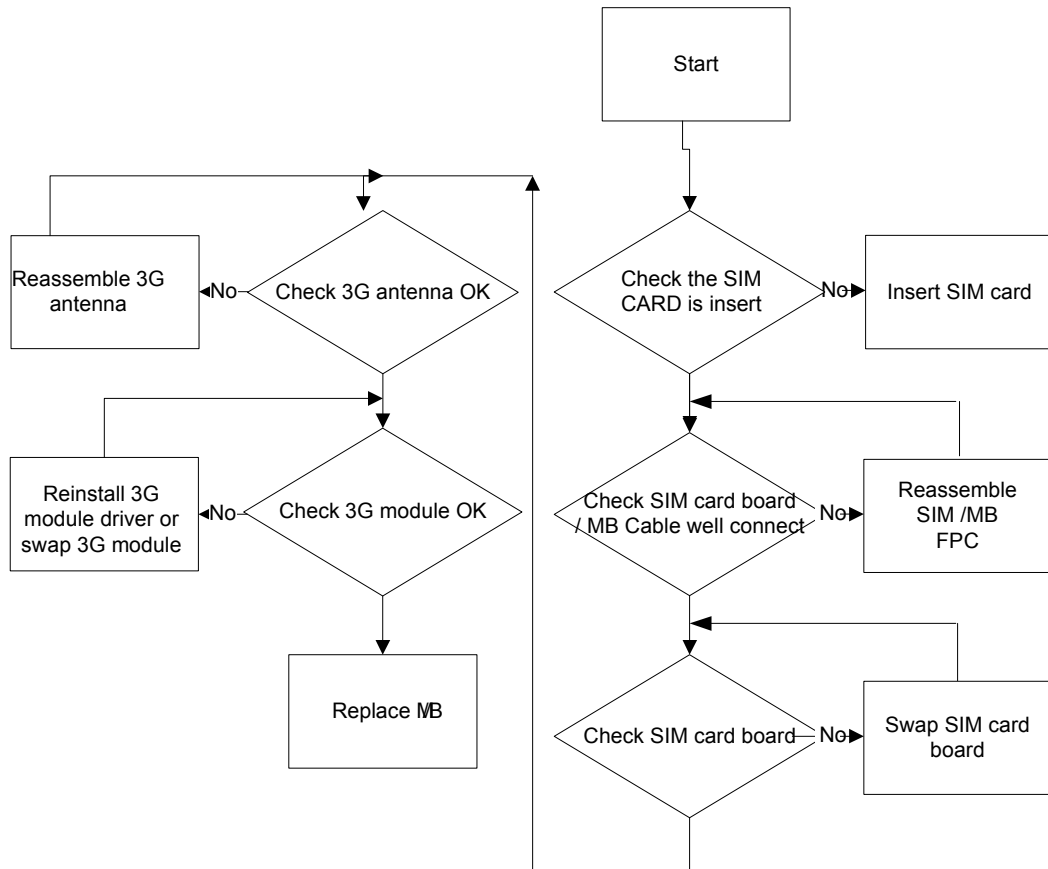


Figure 4-10. 3G Failure

Card Reader Failure

If the Card Reader fails, perform the following, one at a time. Do not replace a non-defective FRU:

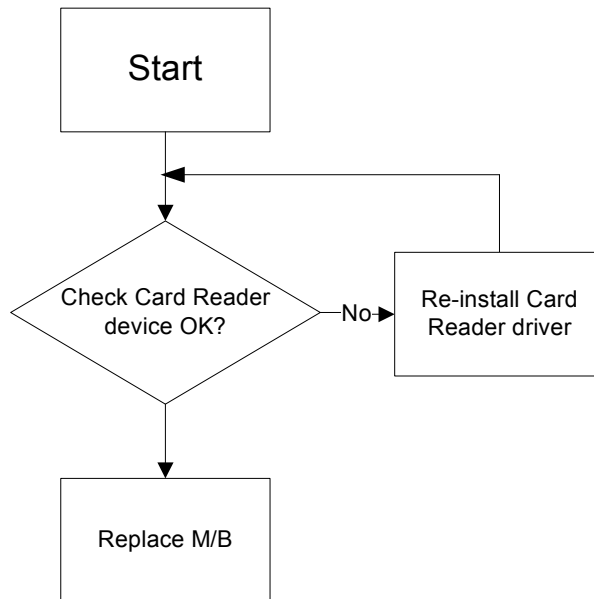


Figure 4-11. Card Reader Failure

Thermal Unit Failure

If the Thermal Unit fails, perform the following, one at a time. Do not replace a non-defective FRU:

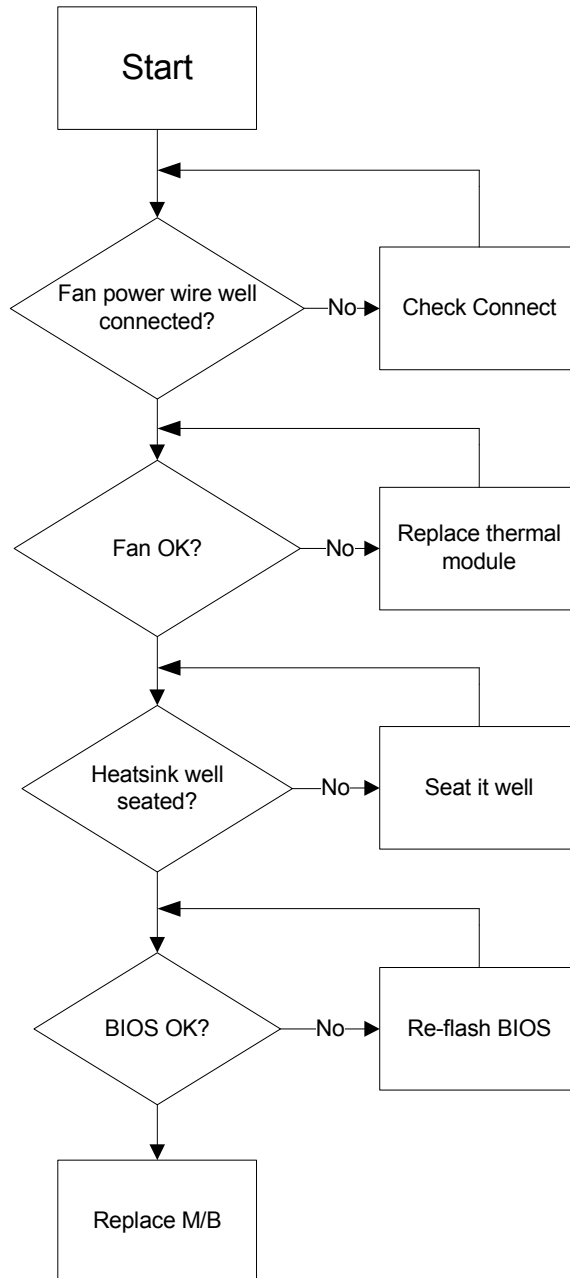


Figure 4-12. Thermal Unit Failure

LAN Unit Failure

If the LAN Unit fails, perform the following, one at a time. Do not replace a non-defective FRU:

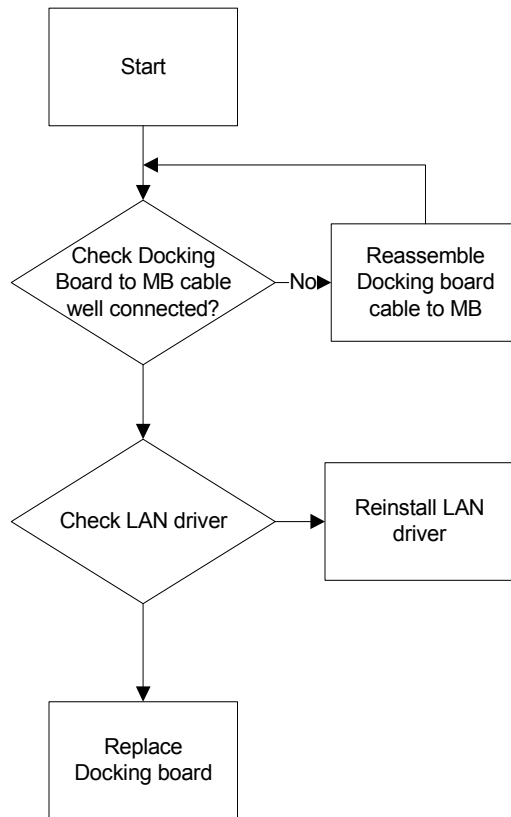


Figure 4-13. LAN unit Failure

Keyboard Failure

If the LAN Unit fails, perform the following, one at a time. Do not replace a non-defective FRU:

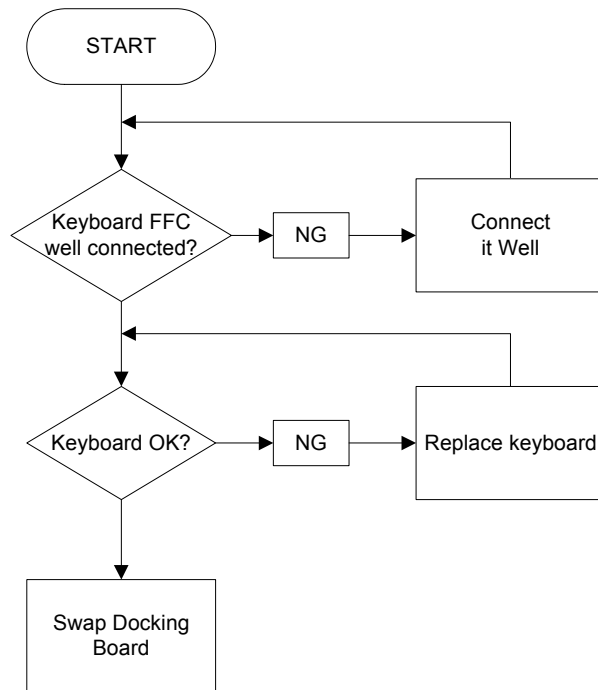


Figure 4-14. Keyboard Failure

Other Functions Failure

1. Check if drives are functioning correctly.
2. Check if external modules are functioning correctly.
3. Change mainboard to check if current one is defective.

Intermittent Problems

Intermittent system hang problems can be caused by a variety of reasons that have nothing to do with a hardware defect, such as: cosmic radiation, electrostatic discharge, or software errors. FRU replacement should be considered only when a recurring problem exists.

When analyzing an intermittent problem, perform the following:

1. Run the advanced diagnostic test for the system board in loop mode at least 10 times.
2. If no error is detected, do not replace any FRU.
3. If an error is detected, replace the FRU. Rerun the test to verify that there are no more errors.

Undetermined Problems

The diagnostic problems does not identify which adapter or device failed, which installed devices are incorrect, whether a short circuit is suspected, or whether the system is inoperative.

Perform the following procedures to isolate the failing FRU (do not isolate non-defective FRU).

⇒ **NOTE:**

Verify that all attached devices are supported by the computer.

⇒ **NOTE:**

Verify that the power supply being used at the time of the failure is operating correctly. (Refer to [Power On Issues](#)).

1. Remove power from the computer.
2. Visually check the components for damage. If any problems are found, replace the FRU.
3. Remove or disconnect all of the following devices:
 - Non-Acer devices
 - Keyboard, mouse, and other external devices
 - Battery pack
 - SSD
4. Apply power to the computer.
5. Determine if the problem has changed.
6. If the problem does not recur, connect the removed devices one at a time until failing FRU is found.
7. If the problem remains, replace the following FRUs one at a time. Do not replace a non-defective FRU:
 - System board
 - LCD assembly

Post Codes

The following are the InsydeH2O™ Functionality POST code tables. The components of the POST code table includes: SEC phase, PEI phase, DXE phase, BDS phase, CSM functions, S3 functions and ACPI functions.

POST Code Range

Table 4-2. POST Code Range

Phase	POST Code Range
SEC	0x01 - 0x0F
PEI	0x70 - 0x9F
DXE	0x40 - 0x6F
BDS	0x10 - 0x3F
SMM	0xA0 - 0xBF
S3	0xC0 - 0xCF
ASL	0x51 – 0x55 0xE1 – 0xE4
PostBDS	0xF9 – 0xFE
InsydeH2ODDT™ Reserve	0xD0 – 0xD7
OEM Reserve	0xE8 – 0xEB
Reserved	0xD8 – 0xE0 0xE5 – 0xE7 0xEC – 0xF8

Table 4-3. SEC Phase POST Code Table

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
SEC_SYSTEM_POWER_ON	SEC	1	CPU power on and switch to Protected mode
SEC_BEFORE_MICROCODE_PATCH	SEC	2	Patching CPU microcode
SEC_AFTER_MICROCODE_PATCH	SEC	3	Setup Cache as RAM
SEC_ACCESS_CSR*	SEC	4	PCIE MMIO Base Address initial
SEC_GENERIC_MSRINIT*	SEC	5	CPU Generic MSR initialization
SEC_CPU_SPEEDCFG*	SEC	6	Setup CPU speed

Table 4-3. SEC Phase POST Code Table (Continued)

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
SEC_SETUP_CAR_OK	SEC	7	Cache as RAM test
SEC_FORCE_MAX_RATIO*	SEC	8	Tune CPU frequency ratio to maximum level
SEC_GO_TO_SECSTARTUP	SEC	9	Setup BIOS ROM cache
SEC_GO_TO_PEICORE	SEC	0A	Enter Boot Firmware Volume
* 3rd party relate functions – Platform dependence.			

Table 4-4. PEI Phase POST Code Table

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
PEI_SIO_INIT	PEI	70	Super I/O Initialization
PEI_CPU_REG_INIT	PEI	71	CPU Early Initialization
PEI_CPU_AP_INIT*	PEI	72	Multi-processor Early Initial
PEI_CPU_HT_RESET*	PEI	73	HyperTransport Initialization
PEI_PCIE_MMIO_INIT	PEI	74	PCIE MMIO BAR Initialization
PEI_NB_REG_INIT	PEI	75	North Bridge Early Initialization
PEI_SB_REG_INIT	PEI	76	South Bridge Early Initialization
PEI_PCIE_TRAINING*	PEI	77	PCIE Training
PEI_TPM_INIT	PEI	78	TPM Initialization
PEI_SMBUS_INIT	PEI	79	SMBUS Early Initialization
PEI_PROGRAM_CLOCK_GEN	PEI	7A	Clock Generator Initialization
PEI_IGD_EARLY_INITIAL *	PEI	7B	Internal Graphic device early Initialization
PEI_HECI_INIT*	PEI	7C	HECI Initialization
PEI_WATCHDOG_INIT*	PEI	7D	Watchdog timer Initialization
PEI_MEMORY_INIT	PEI	7E	Memory Initial for Normal boot.
PEI_MEMORY_INIT_FOR_CRISIS	PEI	7F	Memory Initial for Crisis Recovery
PEI_MEMORY_INSTALL	PEI	80	Simple Memory test
PEI_TXTPEI*	PEI	81	TXT function early Initialization
PEI_SWITCH_STACK	PEI	82	Start to use Memory
PEI_MEMORY_CALLBACK	PEI	83	Set cache for physical memory
PEI_ENTER_RECOVERY_MODE	PEI	84	Recovery device Initialization

Table 4-4. PEI Phase POST Code Table (Continued)

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
PEI_RECOVERY_MEDIA_FOUND	PEI	85	Found Recovery image
PEI_RECOVERY_MEDIA_NOT_FOUND	PEI	86	Recovery image not found
PEI_RECOVERY_LOAD_FILE_DONE	PEI	87	Load Recovery Image completed
PEI_RECOVERY_START_FLASH	PEI	88	Start Flash BIOS with Recovery image
PEI_ENTER_DXEIPL	PEI	89	Loading BIOS image to RAM
PEI_FINDING_DXE_CORE	PEI	8A	Loading DXE core
PEI_GO_TO_DXE_CORE	PEI	8B	Enter DXE core
* 3rd party relate functions – Platform dependence.			

Table 4-5. DXE Phase POST Code Table

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
DXE_TCGDXE*	DXE	40	TPM initial in DXE
DXE_SB_SPI_INIT*	DXE	41	South bridge SPI initialization
DXE_CF9_RESET*	DXE	42	Setup Reset service
DXE_SB_SERIAL_GPIO_INIT*	DXE	43	South bridge Serial GPIO initialization
DXE_SMMACCESS*	DXE	44	Setup SMM ACCE SS service
DXE_SIO_INIT*	DXE	46	Super I/O DXE initialization
DXE_LEGACY_REGION*	DXE	47	Setup Legacy Region service
DXE_SB_INIT*	DXE	48	South Bridge Middle initialization
DXE_IDENTIFY_FLASH_DEVICE*	DXE	49	Identify Flash device
DXE_FTW_INIT	DXE	4A	Fault Tolerant Write verification
DXE_VARIABLE_INIT	DXE	4B	Variable Service initialization
DXE_VARIABLE_INIT_FAIL	DXE	4C	Fail to initial Variable Service
DXE_MTC_INIT	DXE	4D	MTC Initial
DXE_CPU_INIT	DXE	4E	CPU Middle Initialization
DXE_MP_CPU_INIT	DXE	4F	Multi-processor MiddleInitialization
DXE_SMBUS_INIT	DXE	50	SMBUS Driver Initialization
DXE_SMART_TIMER_INIT	DXE	51	8259 Initialization

Table 4-5. DXE Phase POST Code Table (Continued)

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
DXE_PCRTC_INIT	DXE	52	RTC Initialization
DXE_SATA_INIT*	DXE	53	SATA Controller earlyInitialization
DXE_SMM_CONTROLER_INIT*	DXE	54	Setup SMM Control service
DXE_LEGACY_INTERRUPT*	DXE	55	Setup Legacy Interrupt service
DXE_RELOCATE_SMBASE	DXE	56	Relocate SMM BASE
DXE_FIRST_SMI	DXE	57	SMI test
DXE_VTD_INIT*	DXE	58	VTD Initial
DXE_BEFORE_CSM16_INIT	DXE	59	Legacy BIOS Initialization
DXE_AFTER_CSM16_INIT	DXE	5A	Legacy interrupt function Initialization
DXE_LOAD_ACPI_TABLE	DXE	5B	ACPI Table Initialization
DXE_SB_DISPATCH*	DXE	5C	Setup SB SMM Dispatcher service
DXE_SB_IOTRAP_INIT*	DXE	5D	Setup SB IOTRAP Service
DXE_SUBCLASS_DRIVER*	DXE	5E	Build AMT Table
DXE_PPM_INIT*	DXE	5F	PPM Initialization
DXE_HECIDRV_INIT*	DXE	60	HECIDRV Initialization
* 3rd party relate functions – Platform dependence.			

Table 4-6. BDS Phase POST Code Table

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
BDS_ENTER_BDS	BDS	10	Enter BDS entry
BDS_INSTALL_HOTKEY	BDS	11	Install Hotkey service
BDS_ASF_INIT*	BDS	12	ASF Initialization
BDS_PCI_ENUMERATION_START	BDS	13	PCI enumeration
BDS_BEFORE_PCIIO_INSTALL	BDS	14	PCI resource assign complete
BDS_PCI_ENUMERATION_END	BDS	15	PCI enumeration complete
BDS_CONNECT_CONSOLE_IN	BDS	16	Keyboard Controller, keyboard and mouse initialization

Table 4-6. BDS Phase POST Code Table (Continued)

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
BDS_CONNECT_CONSOLE_OUT	BDS	17	Video device initialization
BDS_CONNECT_STD_ERR	BDS	18	Error report device initialization
BDS_CONNECT_USB_HC	BDS	19	USB host controller initialization
BDS_CONNECT_USB_BUS	BDS	1A	USB BUS driver initialization
BDS_CONNECT_USB_DEVICE	BDS	1B	USB device driver initialization
BDS_NO_CONSOLE_ACTION	BDS	1C	Console device initial fail
BDS_DISPLAY_LOGO_SYSTEM_INFO	BDS	1D	Display logo or system information
BDS_START_IDE_CONTROLLER	BDS	1E	IDE controller initialization
BDS_START_SATA_CONTROLLER	BDS	1F	SATA controller initialization
BDS_START_ISA_ACPI_CONTROLLER	BDS	20	SIO controller initialization
BDS_START_ISA_BUS	BDS	21	ISA BUS driver initialization
BDS_START_ISA_FDD	BDS	22	Floppy device initialization
BDS_START_ISA_SEIRAL	BDS	23	Serial device initialization
BDS_START_IDE_BUS	BDS	24	IDE device initialization
BDS_START_AHCI_BUS	BDS	25	AHCI device initialization
BDS_CONNECT_LEGACY_ROM	BDS	26	Dispatch option ROMs
BDS_ENUMERATE_ALL_BOOT_OPTION	BDS	27	Get boot device information
BDS_END_OF_BOOT_SELECTION	BDS	28	End of boot selection
BDS_ENTER_SETUP	BDS	29	Enter Setup Menu
BDS_ENTER_BOOT_MANAGER	BDS	2A	Enter Boot manager
BDS_BOOT_DEVICE_SELECT	BDS	2B	Try to boot system to OS
BDS_EFI64_SHADOW_ALL_LEGACY_ROM	BDS	2C	Shadow Misc Option ROM

Table 4-6. BDS Phase POST Code Table (Continued)

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
BDS_ACPI_S3SAVE	BDS	2D	Save S3 resume required data in RAM
BDS_READY_TO_BOOT_EVENT	BDS	2E	Last Chipset initial before boot to OS
BDS_GO_LEGACY_BOOT	BDS	2F	Start to boot Legacy OS
BDS_GO_UEFI_BOOT	BDS	30	Start to boot UEFI OS
BDS_LEGACY16_PREPARE_TO_BOOT	BDS	31	Prepare to Boot to Legacy OS
BDS_EXIT_BOOT_SERVICES*	BDS	32	Send END of POST Message to ME via HECI
BDS_LEGACY_BOOT_EVENT	BDS	33	Last Chipset initial before boot to Legacy OS.
BDS_ENTER_LEGACY_16_BOOT	BDS	34	Ready to Boot Legacy OS.
BDS_RECOVERY_START_FLASH	BDS	35	Fast Recovery Start Flash.
* 3rd party relate functions – Platform dependence.			

Table 4-7. S3 Functions POST Code Table

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
S3_RESTORE_MEMORY_CONTROLLER	PEI	C0	Memory initial for S3 resume
S3_INSTALL_S3_MEMORY	PEI	C1	Get S3 resume required data from memory
S3_SWITCH_STACK	PEI	C2	Start to use memory during S3 resume
S3_MEMORY_CALLBACK	PEI	C3	Set cache for physical memory during S3 resume
S3_ENTER_S3_RESUME_PEIM	PEI	C4	Start to restore system configuration
S3_BEFORE_ACPI_BOOT_SCRIPT	PEI	C5	Restore system configuration stage1
S3_BEFORE_RUNTIME_BOOT_SCRIPT	PEI	C6	Restore system configuration stage2
S3_BEFORE_RELOCATE_SMM_BASE	PEI	C7	Relocate SMM BASE during S3 resume

Table 4-7. (Continued)S3 Functions POST Code Table

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
S3_BEFORE_MP_INIT	PEI	C8	Multi-processor initial during S3 resume
S3_BEFORE_RESTORE_ACPI_CALLBACK	PEI	C9	Start to restore system configuration in SMM
S3_AFTER_RESTORE_ACPI_CALLBACK	PEI	CA	Restore system configuration in SMM complete
S3_GO_TO_FACS_WAKING_VECTOR	PEI	CB	Back to OS

Table 4-8. ACPI Functions POST Code Table

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
ASL_ENTER_S1	ASL	51	Prepare to enter S1
ASL_ENTER_S3	ASL	53	Prepare to enter S3
ASL_ENTER_S4	ASL	54	Prepare to enter S4
ASL_ENTER_S5	ASL	55	Prepare to enter S5
ASL_WAKEUP_S1	ASL	E1	System wakeup from S1
ASL_WAKEUP_S3	ASL	E3	System wakeup from S3
ASL_WAKEUP_S4	ASL	E4	System wakeup from S4

Table 4-9. SMM Functions POST Code Table

Functionality Name (Include\ PostCode.h)	Phase	Post Code	Description
SMM_IDENTIFY_FLASH_DEVICE	SMM	0xA0	Identify Flash device in SMM
SMM_SMM_PLATFORM_INIT	SMM	0xA2	SMM service initial
SMM_ACPI_ENABLE_START	SMM	0xA6	OS call ACPI enable function
SMM_ACPI_ENABLE_END	SMM	0xA7	ACPI enable function complete
SMM_S1_SLEEP_CALLBACK	SMM	0xA1	Enter S1
SMM_S3_SLEEP_CALLBACK	SMM	0xA3	Enter S3
SMM_S4_SLEEP_CALLBACK	SMM	0xA4	Enter S4
SMM_S5_SLEEP_CALLBACK	SMM	0xA5	Enter S5
SMM_ACPI_DISABLE_START	SMM	0xA8	OS call ACPI disable function
SMM_ACPI_DISABLE_END	SMM	0xA9	ACPI disable function complete

Table 4-10. InsydeH2ODDT Debugger POST Code Table

Functionality Name (Include\ PostCode.h)	Post Code	Description
Used by Insyde debugger	0x0D	Waiting for device connect
Used by Insyde debugger	0xD0	Waiting for device connect
Used by Insyde debugger	0xD1	InsydeH2ODDT Ready
Used by Insyde debugger	0xD2	EHCI not found
Used by Insyde debugger	0xD3	Debug port connect low speed device
Used by Insyde debugger	0xD4	DDT Cable become low speed device
Used by Insyde debugger	0xD5	DDT Cable Transmission Error (Get descriptor fail)
Used by Insyde debugger	0xD6	DDT Cable Transmission Error (Set Debug mode fail)
Used by Insyde debugger	0xD7	DDT Cable Transmission Error (Set address fail)

CHAPTER 5

Jumper and Connector Locations

Clearing Password Check and BIOS Recovery	5-5
Clearing Password Check	5-5
Clear CMOS Jumper	5-7
BIOS Crisis Recovery	5-8

Jumper and Connector Locations

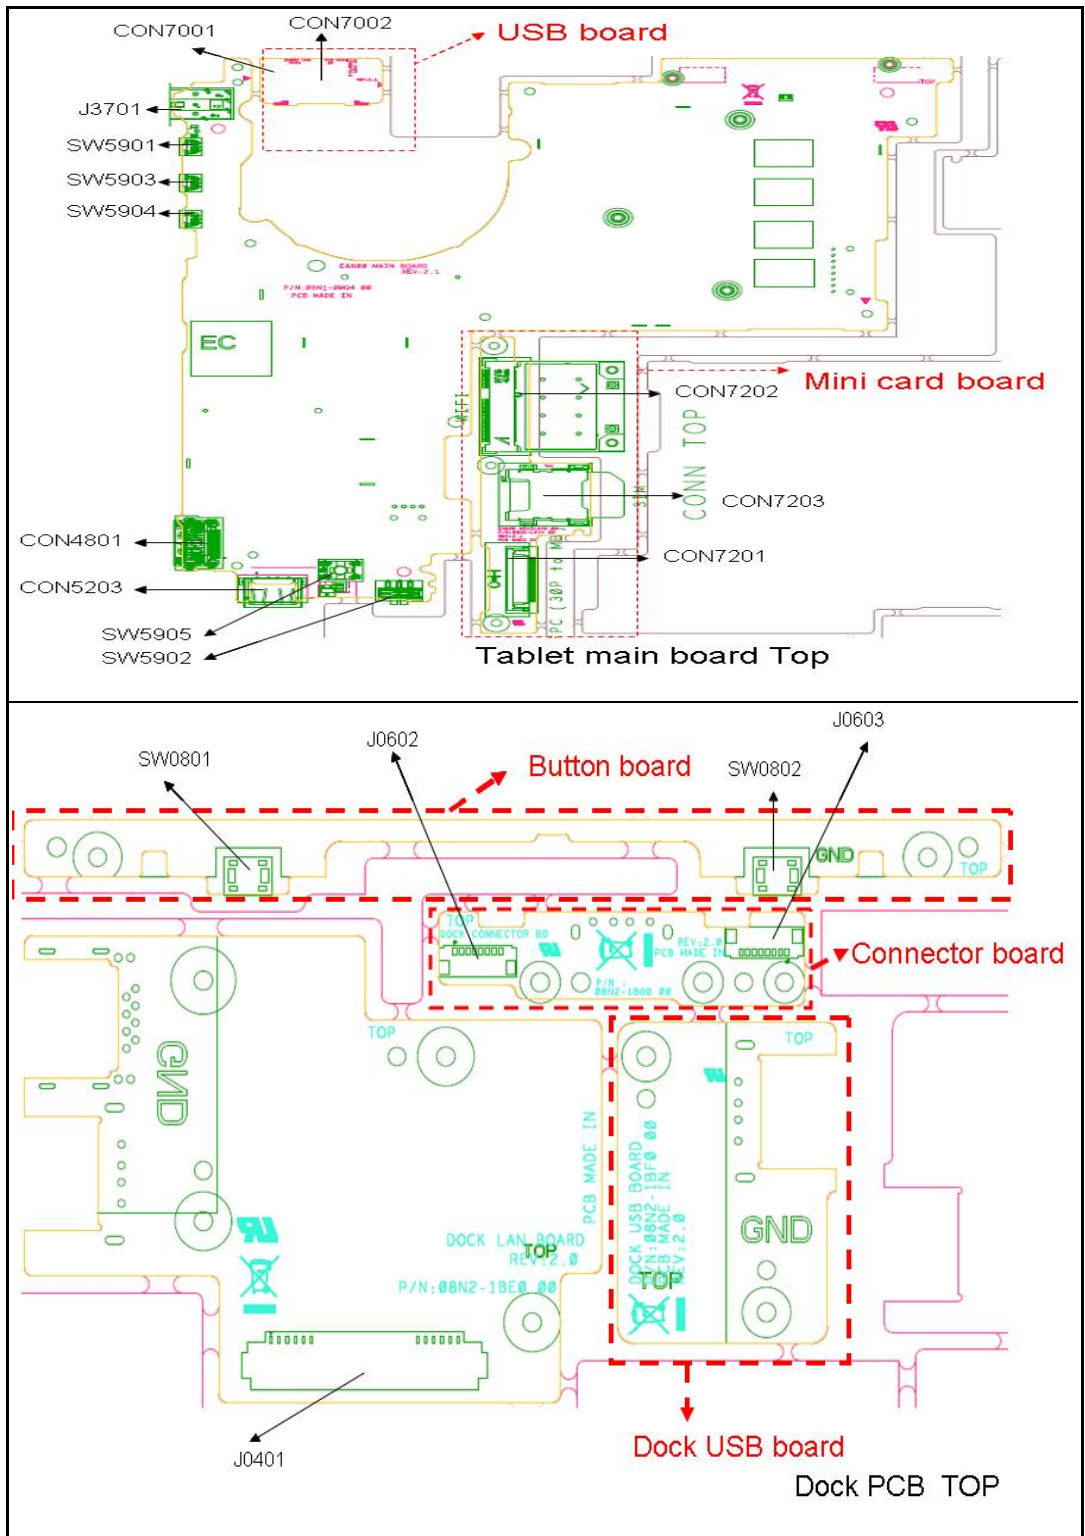


Figure 5-1. Mainboard Top

Table 5-1. Mainboard Top

Item	Description	Item	Description
J3701	Headphone & external MIC combo Jack	CON4801	HDMI Connector
CON5203	USB port	CON7001	USB board to Main board cable connector
CON7002	USB port (for dock)	CON7201	Mini card board to Main board FPC connector
CON7202	WLAN mini card connector	CON7203	SIM Card Connector
SW5901	POWER SW	SW5902	LOCK SLIDE SWITCH
SW5903	Volume UP	SW5904	Volume DOWN
SW5905	HOME BTN		
Dock TOP			
J0401	Internal Keyboard Connector	J0602	Holder board to RJ45 connector
J0603	Holder board to Dock USB board connector	SW0801	Track point left button
SW0802	Track point left button		

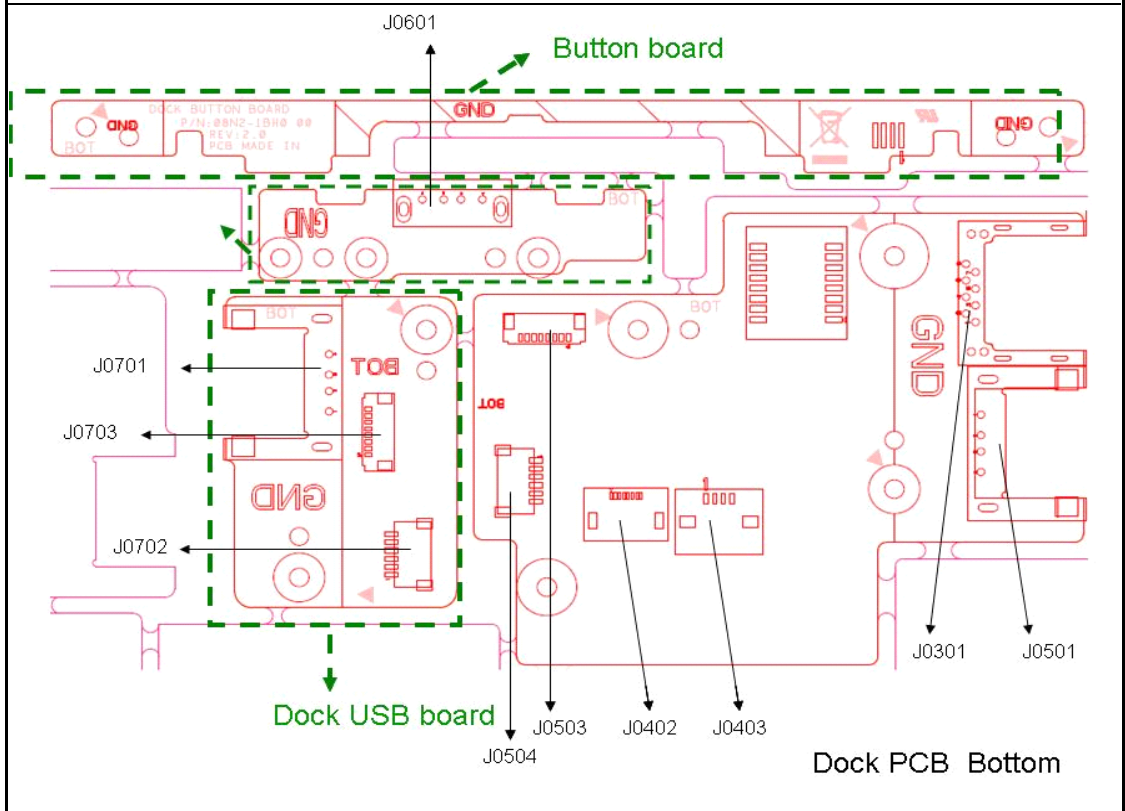
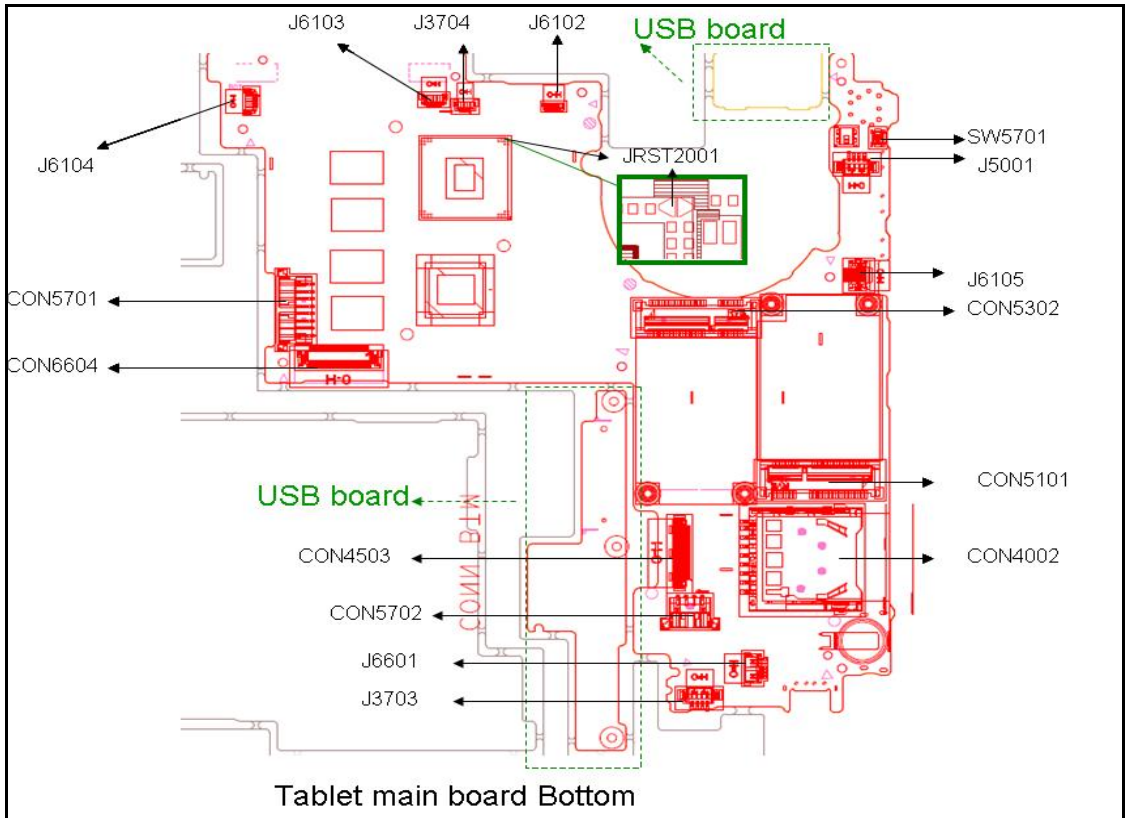


Figure 5-2. Mainboard Bottom

Table 5-2. Mainboard Bottom

Item	Description	Item	Description
J3703	Speker connector	J3704	Internal MIC connector
J5001	Fan connector	J6102	GPS module connector
J6103	Camera connector (front)	J6104	Camera connector (rear)
J6105	Touch panel connector	J6601	Main board to USB board cable connector
CON4002	SD Card connector	CON5101	SSD connector
CON5302	3G Card connector	CON5701	Battery Connector
CON5702	AC Cable connector	CON6604	Main board to Mini card board FPC connector
SW5701	Battery Switch	JRST2001	RTC Reset
Dock Buttom			
J0301	RJ45 Connector	J0402	Track point connector
J0403	Touch button board to LAN board connector	J0501	USB Port(left)
J0503	LAN board to Holder board connector	J0504	LAN board to Dock USB board connector
J0601	Vertical USB Port	J0701	USB Port(right)
J0702	Dock USB board to LAN board connector	J0703	Dock USB board to Holder board connector

Clearing Password Check and BIOS Recovery

This section provides procedures for:

Clearing Passwords

BIOS Recovery.

This Machine has one Hardware Open Gap on the main board for clearing password check and one Hotkey for enabling BIOS Recovery.

Clearing Password Check

Due to the lack of virtual keyboard in pre-boot environment, this model will not support BIOS password and HDD password.

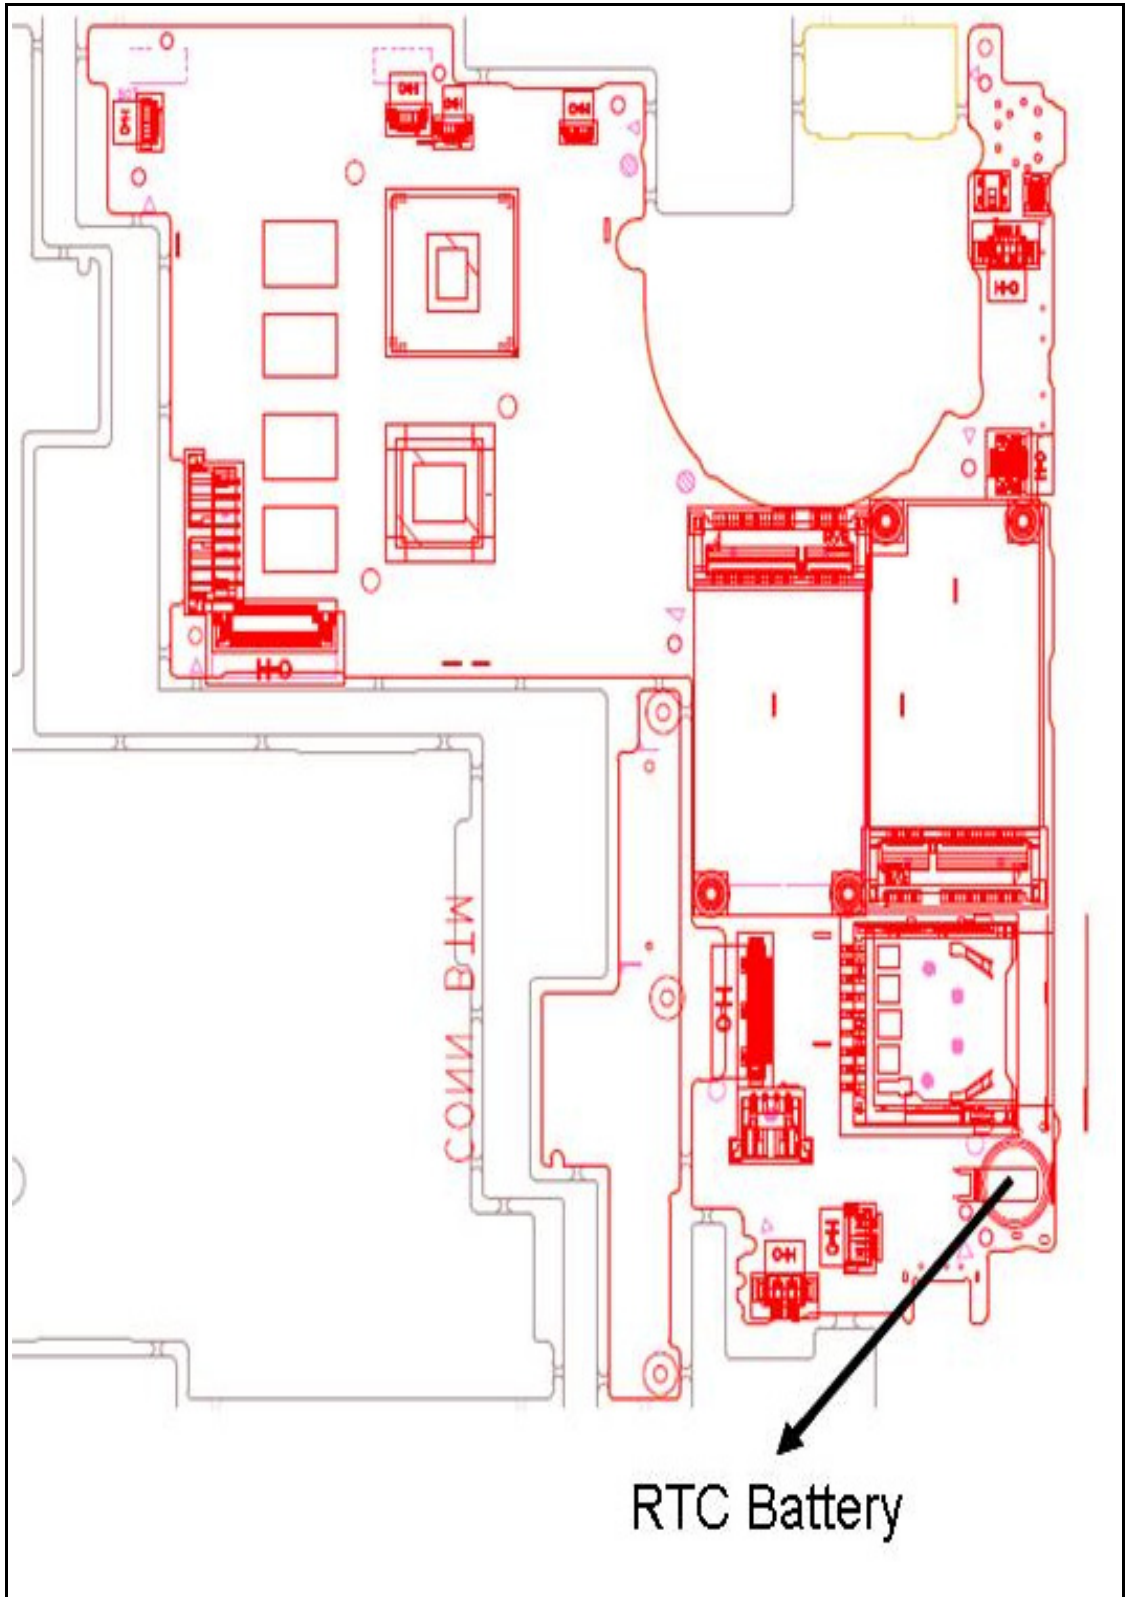


Figure 5-3. RTC Battery

1. Locate the RTCRST# jumper.
2. Use an electric conductivity tool to short the two points of the RTCRST# jumper.
3. Plug in AC, keeping the RTCRST# jumper shorted.
4. Press *Power Button* until BIOS POST is finished, then remove the conductivity tool from the RTCRST# jumper.
5. Restart the system. Press **F2** to enter BIOS Setup menu.
6. If there is no Password request, BIOS Password is cleared.
7. If a password is requested, repeat Steps 1 through 6.

Clear CMOS Jumper

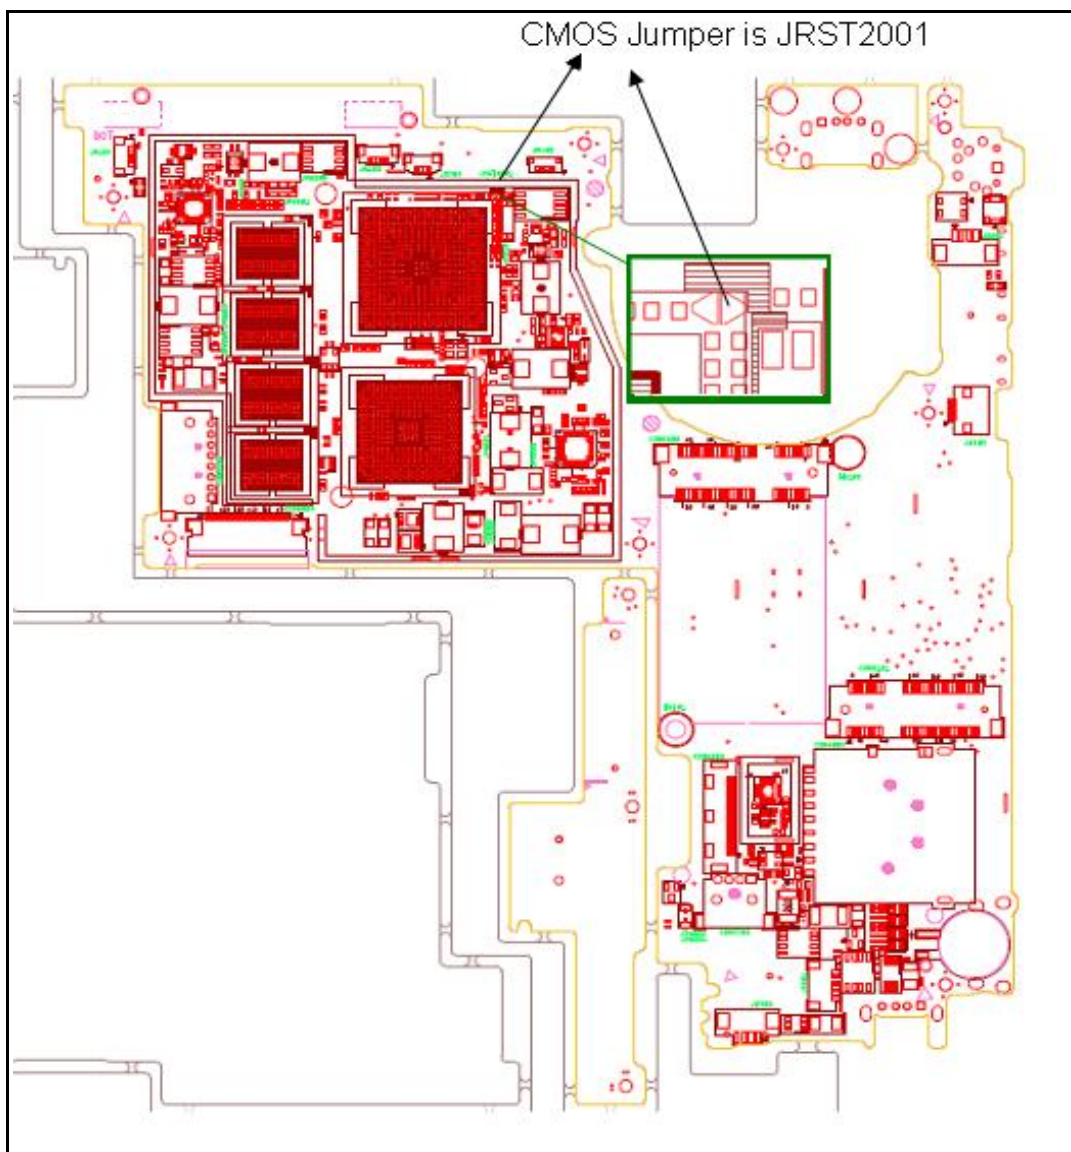


Figure 5-4. CMOS Jumper

Table 5-3. CMOS Jumper

Item	Description
RTCRST#	Clear CMOS Jumper

BIOS Crisis Recovery

BIOS Recovery Boot Block

BIOS Recovery Boot Block is a special block of BIOS, used to boot the system with minimum BIOS initialization. Users can enable this feature to restore the BIOS firmware once the previous BIOS flashing process failed.

BIOS Recovery Hotkey

Press Power Button + Quick Button + Volume Down Key while Rotation Lock is on and a crisis recovery USB flash is connected. Please refer to the following picture.



BIOS Crisis Recovery from USB flash

⇒ NOTE:

This feature provides an opportunity for system that cannot boot up. With a USB flash, the system can be perform crisis recovery.

To perform crisis recovery, do the following:

1. Prepare a USB flash with BIOS file inside and rename BIOS file to EAB00x64.FD, the USB flash must be bootable and Fat32 format.
2. Before power on the system, please make sure that the usb flash has been connected to the system and the rotation lock switch is locked.
3. Make sure AC adapter is powered and plugged-in.
4. Press Power Button + Quick Button(a key with windows logo on the top side) + Volume Down Key at the same time.
5. After POST, release Quick Button + Volume Down + Power Button.
6. The system should boot from USB flash and perform crisis recovery action.

CHAPTER 6

FRU List

ICONIA Tab WT500 Exploded Diagrams	6-2
Main Assembly	6-2
Docking Module Assembly Exploded Diagram	6-4
FRU List	6-6

FRU (Field Replaceable Unit) List

This chapter provides users with a FRU (Field Replaceable Unit) listing in global configurations for the ICONIA Tab WT500. Refer to this chapter whenever ordering for parts to repair or for RMA (Return Merchandise Authorization).

⇒ **NOTE:**

WHEN ORDERING FRU PARTS, check the most up-to-date information available on the regional web or channel. Part number changes will not be noted on the printed Service Guide. For ACER AUTHORIZED SERVICE PROVIDERS, the Acer office may have a DIFFERENT part number code from those given in the FRU list of this printed Service Guide. Users MUST use the local FRU list provided by the regional Acer office to order FRU parts for repair and service of customer machines.

⇒ **NOTE:**

To scrap or to return the defective parts, users should follow the local government ordinance or regulations on how to dispose it properly, or follow the rules set by the regional Acer office on how to return it.

ICONIA Tab WT500 Exploded Diagrams

Main Assembly

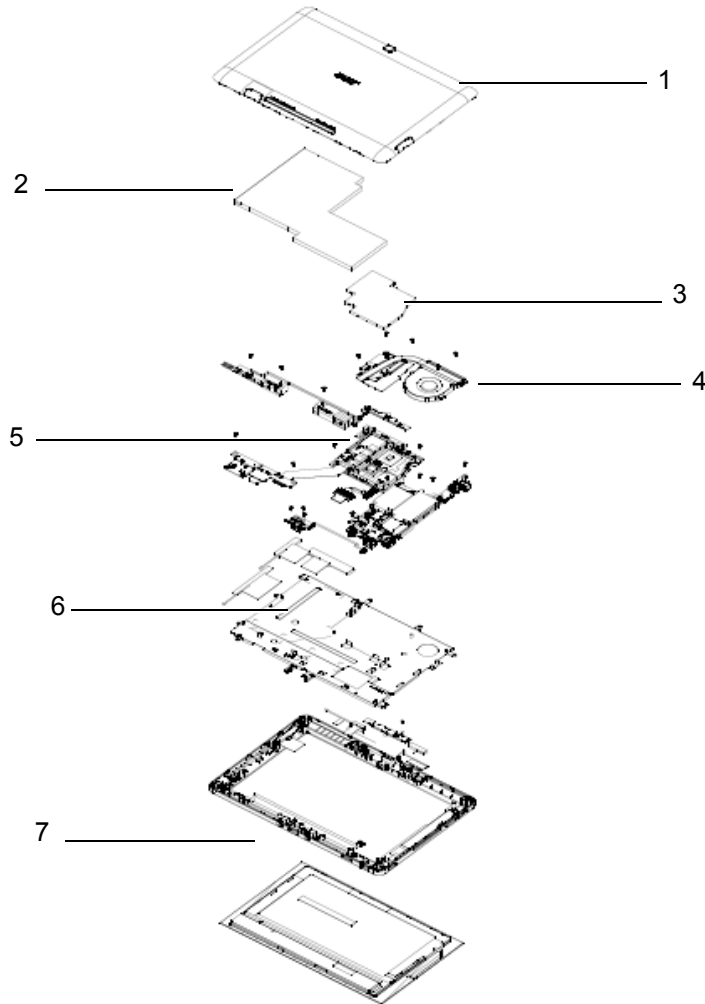


Figure 6-1. Main Assembly Exploded Diagram

Table 6-1. Main Assembly Exploded Diagram

Item	Description	Part Number	Item	Description	Part Number
1	PAD COVER ASSY	60.L080U.001	5	MAINBOARD ICONIA_TAB_W1 LF W/AMDC50B,	MB.RHC0P.001

Table 6-1. Main Assembly Exploded Diagram

Item	Description	Part Number	Item	Description	Part Number
2	BATTERY SANYO AP11B POLYMER 3S1P SANYO 3 CELL 3260MAH MAIN COMMON	BT.00307.034	6	PAD LCD BRKT ASSY	60.L080U.002
3	CPU SHIELDING	33.L080U.001	7	TOUCH PANEL ASSY AUO W/BEZEL, DC-IN, FFC CABLE, MIC,ANTENNA FOR NON 3G	6M.L080U.001
4	THERMAL MODULE	60.L080U.003			

Docking Module Assembly Exploded Diagram

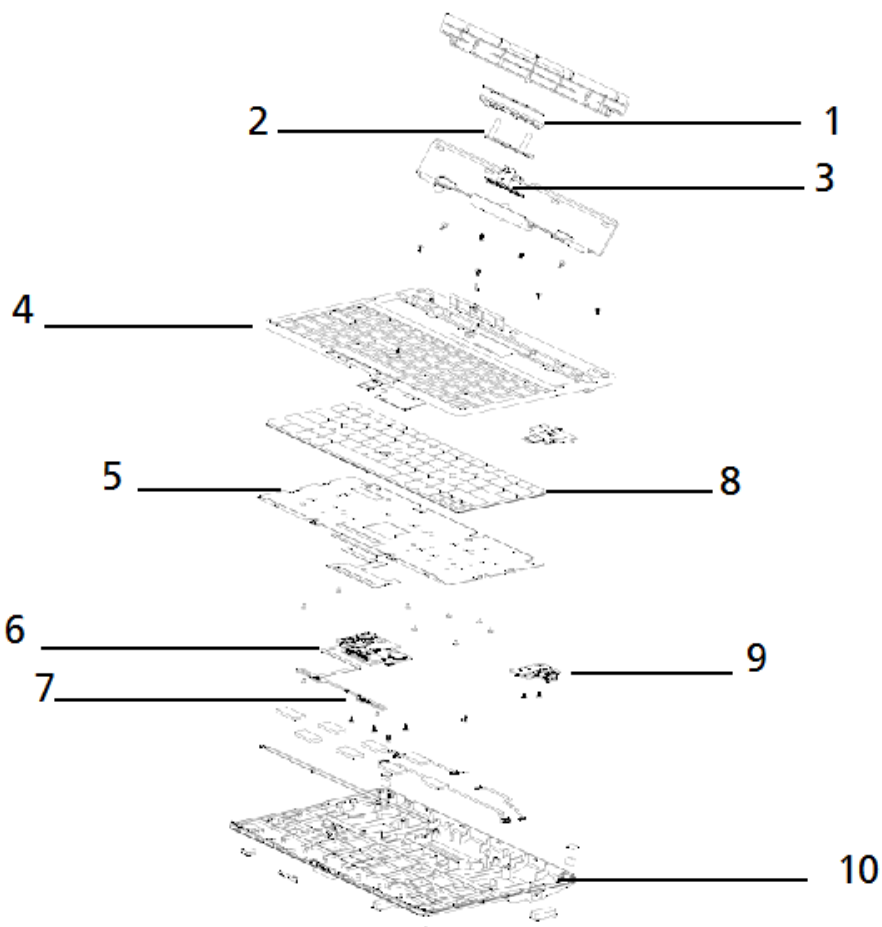


Table 6-2. Docking Module Assembly Exploded Diagram

Item	Description	Part Number	Item	Description	Part Number
1	DOCKING HOLD COVER ASSY	42.L080U.002	6	LAN BOARD IN DOCKING	55.L080U.005
2	DOCKING GUIDE PIN BRKT	33.L080U.002	7	BUTTON BOARD W/FFC IN DOCKING	55.L080U.003
3	CONNECTOR BOARD IN DOCKING	55.L080U.006	8	Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 84KS Black Arabic Texture	KB.I100A.150
4	DOCKING TOP CASE ASSY	60.L080U.004	9	USB BOARD IN DOCKING	55.L080U.004

Table 6-2. Docking Module Assembly Exploded Diagram

Item	Description	Part Number	Item	Description	Part Number
5	KB COVER BRKT ASSY	60.L080U.006	10	DOCKING BOTTOM CASE ASSY W/RUBBER FOOT	60.L080U.005

FRU List

Table 6-3. Main Unit Fru-list






CATEGORY	Photo	Acer Part Name	ACER PART NO.
ADPATER		ADAPTER DELTA 40W 19V 1.7X5.5X11 BLACK ADP-40 TH AA, LV5 WALL-MOUNTED, OBL LF	AP.04001.002
ADPATER		ADAPTER LEADER 40W 19V 1.7X5.5X11 BLACK IU40-11190-011S, WALL-MOUNTED, LV5+OBL LF	AP.04007.002
BATTERY		BATTERY SANYO AP11B POLYMER 3S1P SANYO 3 CELL 3260MAH MAIN COMMON	BT.00303.024
BATTERY		BATTERY SIMPLO AS11B7H POLYMER 3S1P LGC 3 CELL 3260MAH 2ND COMMON	BT.00307.034
BOARD		MINI CARD W/FOIL	55.L080U.001
BOARD		USB BOARD	55.L080U.002
BOARD		Hon Hai Wireless LAN Atheros WB195 (WLAN HB95 1x1 BGN +BT ATH3011)	NI.23600.092

Table 6-3. Main Unit Fru-list






CATEGORY	Photo	Acer Part Name	ACER PART NO.
BOARD		Huawei EM770W-Rev2	LC.21300.066
AC PLUG		AC PLUG_PRC	27.L080U.001
AC PLUG		AC PLUG_KOREA	27.L080U.002
AC PLUG		AC PLUG_UL	27.L080U.003
AC PLUG		AC PLUG_BRZ	27.L080U.004
AC PLUG		AC PLUG_UK	27.L080U.005
AC PLUG		AC PLUG_SAF	27.L080U.006
AC PLUG		AC PLUG_EU	27.L080U.007
AC PLUG		AC PLUG_ARG	27.L080U.008
AC PLUG		AC PLUG_AF	27.L080U.009
AC PLUG		AC PLUG_AUS	27.L080U.010
CABLE		LVDS CABLE	50.L080U.001
CABLE		USB CABLE	50.L080U.002
CABLE		CAMERA CABLE	50.L080U.003

Table 6-3. Main Unit Fru-list

CATEGORY	Photo	Acer Part Name	ACER PART NO.
CABLE		FPC CABLE - MB TO MINI CARD	50.L080U.004
CASE/COVER/BRA CKET ASSEMBLY		PAD COVER ASSY	60.L080U.001
CASE/COVER/BRA CKET ASSEMBLY		PAD LCD BRKT ASSY	60.L080U.002
CASE/COVER/BRA CKET ASSEMBLY		CPU SHIELDING	33.L080U.001
CASE/COVER/BRA CKET ASSEMBLY		SD DUMMY CARD	42.L080U.001
MISCELLANEOUS		SSD AL MYLAR	47.L080U.001
MISCELLANEOUS		WLAN GASKET	47.L080U.002

Table 6-3. Main Unit Fru-list

CATEGORY	Photo	Acer Part Name	ACER PART NO.
HDD		FLASH DISK SANDISK SSD NAND 32GB SDSA4DH-032G LF+HF	KF.0320D.001
HEATSINK		THERMAL MODULE	60.L080U.003
MISCELLANEOUS		THERMAL PAD FOR 3G CARD	
MAINBOARD		MAINBOARD ICONIA_TAB_W1 LF W/AMDC50B,	MB.RHC0P.001
MAINBOARD		MAINBOARD ICONIA_TAB_W1 LF W/AMDC50B,	MB.RHC0P.001
CAMERA		CHICONY 1.3M CH_6A1(TSV)_SP (9A)	AM.21400.101
CAMERA		CHICONY 1.3M CH_6A1(TSV)_SP (9A)	AM.21400.095
LCD PANEL		TOUCH PANEL ASSY AUO W/BEZEL, DC-IN, FFC CABLE, MIC,ANTENNA FOR NON 3G	6M.L080U.001

Table 6-3. Main Unit Fru-list

CATEGORY	Photo	Acer Part Name	ACER PART NO.
LCD PANEL		TOUCH PANEL ASSY AUO W/BEZEL, DC-IN, FFC CABLE, MIC,ANTENNA FOR 3G	6M.L090U.001
SPEAKER		SPEAKER W/ANTENNA	23.L080U.001
MICPHONE		MIC	23.L080U.002
SCREW		SCREW M2*3L (K) B-ZN #1 NY	86.L080U.001
SCREW		SCREW M2*4L (K) (?3.6)W-NI,NY	86.L080U.002

Table 6-4. Docking Fru-list

CATEGORY	Photo	Acer Part Name	ACER PART NO.
BOARD		BUTTON BOARD W/FFC IN DOCKING	55.L080U.003
BOARD		USB BOARD IN DOCKING	55.L080U.004
BOARD		LAN BOARD IN DOCKING	55.L080U.005
BOARD		CONNECTOR BOARD IN DOCKING	55.L080U.006
CABLE		DOCKING USB2 CABLE	50.L080U.005
CABLE		HOLDER CABLE IN DOCKING	50.L080U.006
CABLE		DOCKING USB CABLE	50.L080U.007
CASE/COVER/BRA CKET ASSEMBLY		DOCKING GUIDE PIN BRKT	33.L080U.002

Table 6-4. Docking Fru-list

CATEGORY	Photo	Acer Part Name	ACER PART NO.
CASE/COVER/BRA CKET ASSEMBLY		DOCKING TOP CASE ASSY	60.L080U.004
CASE/COVER/BRA CKET ASSEMBLY		DOCKING BOTTOM CASE ASSY W/RUBBER FOOT	60.L080U.005
CASE/COVER/BRA CKET ASSEMBLY		DOCKING HOLD COVER ASSY	42.L080U.002
CASE/COVER/BRA CKET ASSEMBLY		KB COVER BRKT ASSY	60.L080U.006
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 84KS Black Arabic Texture	KB.I100A.150
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Belgium Texture	KB.I100A.151
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Brazilian Portuguese Texture	KB.I100A.152
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black CZ/SK Texture	KB.I100A.153
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 84KS Black Chinese Texture	KB.I100A.154

Table 6-4. Docking Fru-list

CATEGORY	Photo	Acer Part Name	ACER PART NO.
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Danish Texture	KB.I100A.155
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black FR/Arabic Texture	KB.I100A.156
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black French Texture	KB.I100A.157
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black German Texture	KB.I100A.158
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 84KS Black Greek Texture	KB.I100A.159
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Hungarian Texture	KB.I100A.160
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Italian Texture	KB.I100A.161
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 88KS Black Japanese Texture	KB.I100A.162
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 84KS Black Korean Texture	KB.I100A.163
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Nordic Texture	KB.I100A.164
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Norwegian Texture	KB.I100A.165
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Portuguese Texture	KB.I100A.166
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 84KS Black Russian Texture	KB.I100A.167

Table 6-4. Docking Fru-list

CATEGORY	Photo	Acer Part Name	ACER PART NO.
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black SLO/CRO Texture	KB.I100A.168
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Spanish Texture	KB.I100A.169
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Sweden Texture	KB.I100A.170)
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Swiss/G Texture	KB.I100A.171
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 84KS Black Thailand Texture	KB.I100A.172
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Turkish Texture	KB.I100A.173
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black UK Texture	KB.I100A.174
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 84KS Black US International Texture	KB.I100A.175
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 84KS Black US International w/ Hebrew Texture	KB.I100A.176
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black US w/ Canadian French Texture	KB.I100A.177
KEYBOARD		Keyboard ACER AF1T_A10B AF1T Internal 10 Standard 85KS Black Bulgaria Texture	KB.I100A.178

Table 6-4. Docking Fru-list

CATEGORY	Photo	Acer Part Name	ACER PART NO.
SCREW		SCREW M2*3L (K) B-ZN #1 NY	86.L080U.001
SCREW		SCREW M2*4L (K) (3.6)W-NI,NY	86.L080U.002
SCREW		SCREW M1.4*3L (K) B-ZN #0	86.L080U.003

CHAPTER 7

Model Definition and Configuration

ICONIA Tab W500..... 7-1

Model Definition and Configuration

ICONIA Tab W500

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C5_2G03iss	EMEA	UK	LE.L0803.027	ICONIA_Tab_W500P-C52G03iss W7PR32ISGB1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_EN11
ICONIA_Tab_W500P-C5_2G03iss	EMEA	Czech	LE.L0803.009	ICONIA_Tab_W500P-C52G03iss W7PR32ISCZ2 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SK11
ICONIA_Tab_W500P-C5_2G03iss	AAP	Philippines	LE.L0803.054	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISPH1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C5_2G03iss	AAP	Vietnam	LE.L0803.053	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISVN1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C5_2G03iss	TWN	GCTWN	LE.L0803.048	ICONIA_Tab_W500P-C52G03iss W7PR32IRTW1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD_CIMR_TC42
ICONIA_Tab_W500P-C5_2G03iss	AAP	Thailand	LE.L0803.049	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISTH1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_TH71
ICONIA_Tab_W500P-C5_2G03iss	AAP	Singapore	LE.L0803.052	ICONIA_Tab_W500P-C52G03iss W7PR32ISSG1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ZH31

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	AAP	Singapore	LE.L0803.051	ICONIA_Tab_W500P-C52G03iss W7PR32ISSG1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	Ukraine	LE.L0803.045	ICONIA_Tab_W500P-C52G03iss W7PR32RUISUK1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RU61
ICONIA_Tab_W500P-C52G03iss	EMEA	Russia	LE.L0803.043	ICONIA_Tab_W500P-C52G03iss W7PR32RUISRU1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RU11
ICONIA_Tab_W500P-C52G03iss	EMEA	Russia	LE.L0803.044	ICONIA_Tab_W500P-C52G03iss W7PR32RUISRU1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	Turkey	LE.L0803.042	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISTR1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_TR31
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.034	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISMEC MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.036	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISMEB MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_AR91
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.033	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISMEB MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.032	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME9 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.029	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME6 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.035	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME4 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.028	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME3 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.037	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME2 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.030	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0803.031	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_AR91
ICONIA_Tab_W500P-C52G03iss	EMEA	Algeria	LE.L0803.016	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISDZ1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARB1
ICONIA_Tab_W500P-C52G03iss	EMEA	South Africa	LE.L0803.038	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISZA5 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	South Africa	LE.L0803.040	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISZA4 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	EMEA	South Africa	LE.L0803.041	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISZA2 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	South Africa	LE.L0803.039	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISZA1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81
ICONIA_Tab_W500P-C52G03iss	EMEA	Switzerland	LE.L0803.026	ICONIA_Tab_W500P-C52G03iss W7PR32ISCH1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT41
ICONIA_Tab_W500P-C52G03iss	EMEA	Poland	LE.L0803.021	ICONIA_Tab_W500P-C52G03iss W7PR32ISPL1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_PL11
ICONIA_Tab_W500P-C52G03iss	EMEA	Italy	LE.L0803.019	ICONIA_Tab_W500P-C52G03iss W7PR32ISIT1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT11
ICONIA_Tab_W500P-C52G03iss	EMEA	Israel	LE.L0803.018	ICONIA_Tab_W500P-C52G03iss W7PR32ISIL1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_HE71
ICONIA_Tab_W500P-C52G03iss	EMEA	Baltic	LE.L0803.005	ICONIA_Tab_W500P-C52G03iss W7PR32ISBC4 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_LT11
ICONIA_Tab_W500P-C52G03iss	EMEA	Greece	LE.L0803.012	ICONIA_Tab_W500P-C52G03iss W7PR32ISGR1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_EL31
ICONIA_Tab_W500P-C52G03iss	EMEA	Spain	LE.L0803.025	ICONIA_Tab_W500P-C52G03iss W7PR32ISES1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES51

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	EMEA	Cyprus	LE.L0803.008	ICONIA_Tab_W500P-C52G03iss W7PR32ISCY1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	Portugal	LE.L0803.022	ICONIA_Tab_W500P-C52G03iss W7PR32ISPT1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_PT11
ICONIA_Tab_W500P-C52G03iss	EMEA	Hungary	LE.L0803.017	ICONIA_Tab_W500P-C52G03iss W7PR32ISHU1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_HU11
ICONIA_Tab_W500P-C52G03iss	EMEA	Baltic	LE.L0803.003	ICONIA_Tab_W500P-C52G03iss W7PR32ISBC5 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_LT11
ICONIA_Tab_W500P-C52G03iss	EMEA	Baltic	LE.L0803.004	ICONIA_Tab_W500P-C52G03iss W7PR32ISBC3 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SV21
ICONIA_Tab_W500P-C52G03iss	EMEA	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P-C52G03iss W7PR32ISBA1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_A151
ICONIA_Tab_W500P-C52G03iss	EMEA	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P-C52G03iss W7PR32ISSI1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SL11
ICONIA_Tab_W500P-C52G03iss	EMEA	Romania	LE.L0803.023	ICONIA_Tab_W500P-C52G03iss W7PR32ISRO2 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RO11
ICONIA_Tab_W500P-C52G03iss	EMEA	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P-C52G03iss W7PR32ISBG1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RO11

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	EMEA	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P-C52G03iss W7PR32ISAL1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_A111
ICONIA_Tab_W500P-C52G03iss	EMEA	Austria	LE.L0803.002	ICONIA_Tab_W500P-C52G03iss W7PR32ISAT1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_DE61
ICONIA_Tab_W500P-C52G03iss	EMEA	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P-C52G03iss W7PR32ISLU3 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT41
ICONIA_Tab_W500P-C52G03iss	EMEA	Holland	LE.L0803.013	ICONIA_Tab_W500P-C52G03iss W7PR32ISNL1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_NL11
ICONIA_Tab_W500P-C52G03iss	EMEA	Belgium	LE.L0803.006	ICONIA_Tab_W500P-C52G03iss W7PR32ISBE1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_NL11
ICONIA_Tab_W500P-C52G03iss	EMEA	Germany	LE.L0803.011	ICONIA_Tab_W500P-C52G03iss W7PR32ISDE1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_DE11
ICONIA_Tab_W500P-C52G03iss	EMEA	France	LE.L0803.010	ICONIA_Tab_W500P-C52G03iss W7PR32ISFR1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FR21
ICONIA_Tab_W500P-C52G03iss	EMEA	Denmark	LE.L0803.014	ICONIA_Tab_W500P-C52G03iss W7PR32ISDK2 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ENS1
ICONIA_Tab_W500P-C52G03iss	PA	USA	LE.L0803.047	ICONIA_Tab_W500P-C52G03iss W7PR32ISUS1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FRB1

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	PA	Canada	LE.L0803.046	ICONIA_Tab_W500P-C52G03iss W7PR32ISCA2 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FR81
ICONIA_Tab_W500P-C52G03iss	CHINA	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P-C52G03iss W7PR32ISHK2 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ZH31
ICONIA_Tab_W500P-C52G03iss	WW	WW	S2.L0803.001	ICONIA_Tab_W500P-C52G03iss W7PR32ISWW1 MC Tab_W500P_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	UK	LE.L0703.045	ICONIA_Tab_W500P-C52G03iss W7PR32ISGB1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_EN11
ICONIA_Tab_W500P-C52G03iss	EMEA	Czech	LE.L0703.028	ICONIA_Tab_W500P-C52G03iss W7PR32ISCZ2 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SK11
ICONIA_Tab_W500P-C52G03iss	AAP	Vietnam	LE.L0703.049	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISVN1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	AAP	Singapore	LE.L0703.048	ICONIA_Tab_W500P-C52G03iss W7PR32ISSG1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ZH31
ICONIA_Tab_W500P-C52G03iss	AAP	Singapore	LE.L0703.047	ICONIA_Tab_W500P-C52G03iss W7PR32ISSG1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	Ukraine	LE.L0703.003	ICONIA_Tab_W500P-C52G03iss W7PR32RUISUK1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RU61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	EMEA	Russia	LE.L0703.001	ICONIA_Tab_W500P-C52G03iss W7PR32RUISRU1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RU11
ICONIA_Tab_W500P-C52G03iss	EMEA	Russia	LE.L0703.002	ICONIA_Tab_W500P-C52G03iss W7PR32RUISRU1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	Turkey	LE.L0703.019	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISTR1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_TR31
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.011	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISMEC MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.013	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISMEB MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_AR91
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.010	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISMEB MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.009	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME9 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.006	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME6 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.012	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME4 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.014	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME2 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.005	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME3 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.007	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500P-C52G03iss	EMEA	Middle East	LE.L0703.008	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISME1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_AR91
ICONIA_Tab_W500P-C52G03iss	EMEA	Algeria	LE.L0703.004	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISDZ1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARB1
ICONIA_Tab_W500P-C52G03iss	EMEA	South Africa	LE.L0703.015	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISZA5 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	South Africa	LE.L0703.017	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISZA4 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	South Africa	LE.L0703.018	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISZA2 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500P-C52G03iss	EMEA	South Africa	LE.L0703.016	ICONIA_Tab_W500P-C52G03iss EM W7PR32EMISZA1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	EMEA	Switzerland	LE.L0703.043	ICONIA_Tab_W500P-C52G03iss W7PR32ISCH1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT41
ICONIA_Tab_W500P-C52G03iss	EMEA	Poland	LE.L0703.038	ICONIA_Tab_W500P-C52G03iss W7PR32ISPL1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_PL11
ICONIA_Tab_W500P-C52G03iss	EMEA	Italy	LE.L0703.036	ICONIA_Tab_W500P-C52G03iss W7PR32ISIT1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT11
ICONIA_Tab_W500P-C52G03iss	EMEA	Israel	LE.L0703.035	ICONIA_Tab_W500P-C52G03iss W7PR32ISIL1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_HE71
ICONIA_Tab_W500P-C52G03iss	EMEA	Baltic	LE.L0703.024	ICONIA_Tab_W500P-C52G03iss W7PR32ISBC4 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_LT11
ICONIA_Tab_W500P-C52G03iss	EMEA	Greece	LE.L0703.032	ICONIA_Tab_W500P-C52G03iss W7PR32ISGR1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_EL31
ICONIA_Tab_W500P-C52G03iss	EMEA	Spain	LE.L0703.044	ICONIA_Tab_W500P-C52G03iss W7PR32ISES1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES51
ICONIA_Tab_W500P-C52G03iss	EMEA	Cyprus	LE.L0703.027	ICONIA_Tab_W500P-C52G03iss W7PR32ISCY1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	EMEA	Portugal	LE.L0703.039	ICONIA_Tab_W500P-C52G03iss W7PR32ISPT1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_PT11
ICONIA_Tab_W500P-C52G03iss	EMEA	Hungary	LE.L0703.034	ICONIA_Tab_W500P-C52G03iss W7PR32ISHU1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_HU11
ICONIA_Tab_W500P-C52G03iss	EMEA	Baltic	LE.L0703.022	ICONIA_Tab_W500P-C52G03iss W7PR32ISBC5 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_LT11
ICONIA_Tab_W500P-C52G03iss	EMEA	Baltic	LE.L0703.023	ICONIA_Tab_W500P-C52G03iss W7PR32ISBC3 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SV21
ICONIA_Tab_W500P-C52G03iss	EMEA	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P-C52G03iss W7PR32ISBA1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_A151
ICONIA_Tab_W500P-C52G03iss	EMEA	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P-C52G03iss W7PR32ISSI1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SL11
ICONIA_Tab_W500P-C52G03iss	EMEA	Romania	LE.L0703.040	ICONIA_Tab_W500P-C52G03iss W7PR32ISRO2 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RO11
ICONIA_Tab_W500P-C52G03iss	EMEA	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P-C52G03iss W7PR32ISBG1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RO11
ICONIA_Tab_W500P-C52G03iss	EMEA	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P-C52G03iss W7PR32ISAL1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_A111

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	EMEA	Austria	LE.L0703.021	ICONIA_Tab_W500P-C52G03iss W7PR32ISAT1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_DE61
ICONIA_Tab_W500P-C52G03iss	EMEA	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P-C52G03iss W7PR32ISLU3 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT41
ICONIA_Tab_W500P-C52G03iss	EMEA	Holland	LE.L0703.033	ICONIA_Tab_W500P-C52G03iss W7PR32ISNL1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_NL11
ICONIA_Tab_W500P-C52G03iss	EMEA	Belgium	LE.L0703.025	ICONIA_Tab_W500P-C52G03iss W7PR32ISBE1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_NL11
ICONIA_Tab_W500P-C52G03iss	EMEA	Germany	LE.L0703.031	ICONIA_Tab_W500P-C52G03iss W7PR32ISDE1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_DE11
ICONIA_Tab_W500P-C52G03iss	EMEA	France	LE.L0703.030	ICONIA_Tab_W500P-C52G03iss W7PR32ISFR1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FR21
ICONIA_Tab_W500P-C52G03iss	EMEA	Denmark	LE.L0703.029	ICONIA_Tab_W500P-C52G03iss W7PR32ISDK2 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ENS1
ICONIA_Tab_W500P-C52G03iss	AAP	Japan	LE.L0703.046	ICONIA_Tab_W500P-C52G03iss W7PR32IJP1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_JA11
ICONIA_Tab_W500P-C52G03iss	PA	Canada	LE.L0702.001	ICONIA_Tab_W500P-C52G03iss W7HP32ISCA2 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FR81

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500P-C52G03iss	WW	WW	S2.L0703.001	ICONIA_Tab_W500P-C52G03iss W7PR32ISWW1 MC Tab_W500P_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	India	LE.RK602.059	ICONIA_Tab_W500-C52G03iss W7HP32INISIN1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Australia/New Zealand	LE.RK602.049	ICONIA_Tab_W500-C52G03iss W7HP32ISAU1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	Belgium	LE.RK602.007	ICONIA_Tab_W500-C52G03iss W7HP32ISBE1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_NL11
ICONIA_Tab_W500-C52G03iss	CHINA	Hong Kong	LE.RK602.053	ICONIA_Tab_W500-C52G03iss W7HP32ISHK2 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ZH31
ICONIA_Tab_W500-C52G03iss	AAP	Korea	LE.RK602.055	ICONIA_Tab_W500-C52G03iss W7HP32KISKR1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_KO11
ICONIA_Tab_W500-C52G03iss	EMEA	Czech	LE.RK602.009	ICONIA_Tab_W500-C52G03iss W7HP32ISCZ2 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SK11
ICONIA_Tab_W500-C52G03iss	EMEA	Holland	LE.RK602.014	ICONIA_Tab_W500-C52G03iss W7HP32ISNL1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_NL11
ICONIA_Tab_W500-C52G03iss	EMEA	Spain	LE.RK602.024	ICONIA_Tab_W500-C52G03iss W7HP32ISES1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES51

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	AAP	Vietnam	LE.RK602.058	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISVN1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	TWN	GCTWN	LE.RK602.056	ICONIA_Tab_W500-C52G03iss W7HP32ITW1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD_CIMR_TC42
ICONIA_Tab_W500-C52G03iss	EMEA	Russia	LE.RK602.035	ICONIA_Tab_W500-C52G03iss W7HP32RUISRU1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RU11
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.042	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISMEB MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_AR91
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.045	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME4 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Thailand	LE.RK603.009	ICONIA_Tab_W500-C52G03iss EM W7PR32EMISTH1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD_CIMR_TH71
ICONIA_Tab_W500-C52G03iss	AAP	Philippines	LE.RK603.007	ICONIA_Tab_W500-C52G03iss EM W7PR32EMISPH1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Indonesia	LE.RK603.008	ICONIA_Tab_W500-C52G03iss EM W7PR32EMISID1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD_CIMR_ID21
ICONIA_Tab_W500-C52G03iss	AAP	Thailand	LE.RK602.054	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISTH1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_TH71

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	AAP	Malaysia	LE.RK602.057	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISMY1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Philippines	LE.RK602.048	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISPH1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Singapore	LE.RK602.051	ICONIA_Tab_W500-C52G03iss W7HP32ISSG1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ZH31
ICONIA_Tab_W500-C52G03iss	AAP	Singapore	LE.RK602.050	ICONIA_Tab_W500-C52G03iss W7HP32ISSG1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	Ukraine	LE.RK602.036	ICONIA_Tab_W500-C52G03iss W7HP32RUISUK1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RU61
ICONIA_Tab_W500-C52G03iss	EMEA	Russia	LE.RK602.034	ICONIA_Tab_W500-C52G03iss W7HP32RUISRU1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	Turkey	LE.RK602.041	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISTR1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_TR31
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.029	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISMEC MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.030	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISMEB MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.031	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME9 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.032	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME6 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.033	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME3 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.028	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME2 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.043	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RK602.044	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_AR91
ICONIA_Tab_W500-C52G03iss	EMEA	Algeria	LE.RK602.027	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISDZ1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARB1
ICONIA_Tab_W500-C52G03iss	EMEA	South Africa	LE.RK602.039	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISZA5 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	PA	Canada	LE.RK602.046	ICONIA_Tab_W500-C52G03iss W7HP32ISCA2 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FR81

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	PA	USA	LE.RK602.047	ICONIA_Tab_W500-C52G03iss W7HP32ISUS1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FRB1
ICONIA_Tab_W500-C52G03iss	CHINA	China	LE.RK602.052	ICONIA_Tab_W500-C52G03iss W7HP32SCISCN1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SC11
ICONIA_Tab_W500-C52G03iss	EMEA	South Africa	LE.RK602.040	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISZA4 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	South Africa	LE.RK602.038	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISZA2 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	South Africa	LE.RK602.037	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISZA1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81
ICONIA_Tab_W500-C52G03iss	EMEA	UK	LE.RK602.026	ICONIA_Tab_W500-C52G03iss W7HP32ISGB1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_EN11
ICONIA_Tab_W500-C52G03iss	EMEA	Switzerland	LE.RK602.025	ICONIA_Tab_W500-C52G03iss W7HP32ISCH1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT41
ICONIA_Tab_W500-C52G03iss	EMEA	Poland	LE.RK602.019	ICONIA_Tab_W500-C52G03iss W7HP32ISPL1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_PL11
ICONIA_Tab_W500-C52G03iss	EMEA	Italy	LE.RK602.017	ICONIA_Tab_W500-C52G03iss W7HP32ISIT1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT11

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	EMEA	Israel	LE.RK602.016	ICONIA_Tab_W500-C52G03iss W7HP32ISIL1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_HE71
ICONIA_Tab_W500-C52G03iss	EMEA	Greece	LE.RK602.013	ICONIA_Tab_W500-C52G03iss W7HP32ISGR1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_EL31
ICONIA_Tab_W500-C52G03iss	EMEA	Cyprus	LE.RK602.008	ICONIA_Tab_W500-C52G03iss W7HP32ISCY1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	Portugal	LE.RK602.020	ICONIA_Tab_W500-C52G03iss W7HP32ISPT1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_PT11
ICONIA_Tab_W500-C52G03iss	EMEA	Hungary	LE.RK602.015	ICONIA_Tab_W500-C52G03iss W7HP32ISHU1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_HU11
ICONIA_Tab_W500-C52G03iss	EMEA	Baltic	LE.RK602.005	ICONIA_Tab_W500-C52G03iss W7HP32ISBC4 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_LT11
ICONIA_Tab_W500-C52G03iss	EMEA	Baltic	LE.RK602.004	ICONIA_Tab_W500-C52G03iss W7HP32ISBC5 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_LT11
ICONIA_Tab_W500-C52G03iss	EMEA	Baltic	LE.RK602.006	ICONIA_Tab_W500-C52G03iss W7HP32ISBC3 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SV21
ICONIA_Tab_W500-C52G03iss	EMEA	Slovenia/Croatia	LE.RK602.023	ICONIA_Tab_W500-C52G03iss W7HP32ISS11 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SL11

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	EMEA	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500-C52G03iss W7HP32ISBA1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_A151
ICONIA_Tab_W500-C52G03iss	EMEA	Romania	LE.RK602.021	ICONIA_Tab_W500-C52G03iss W7HP32ISRO2 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RO11
ICONIA_Tab_W500-C52G03iss	EMEA	Bulgaria	LE.RK602.001	ICONIA_Tab_W500-C52G03iss W7HP32ISBG1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RO11
ICONIA_Tab_W500-C52G03iss	EMEA	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500-C52G03iss W7HP32ISAL1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_A111
ICONIA_Tab_W500-C52G03iss	EMEA	Luxembourg	LE.RK602.018	ICONIA_Tab_W500-C52G03iss W7HP32ISLU3 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT41
ICONIA_Tab_W500-C52G03iss	EMEA	Austria	LE.RK602.003	ICONIA_Tab_W500-C52G03iss W7HP32ISAT1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_DE61
ICONIA_Tab_W500-C52G03iss	EMEA	Germany	LE.RK602.012	ICONIA_Tab_W500-C52G03iss W7HP32ISDE1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_DE11
ICONIA_Tab_W500-C52G03iss	EMEA	France	LE.RK602.011	ICONIA_Tab_W500-C52G03iss W7HP32ISFR1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FR21
ICONIA_Tab_W500-C52G03iss	EMEA	Denmark	LE.RK602.010	ICONIA_Tab_W500-C52G03iss W7HP32ISDK2 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ENS1

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	WW	GCTWN	S2.RK602.001	ICONIA_Tab_W500-C52G03iss W7HP32ISWW1 MC Tab_W500_UMACssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD_mSD_CIMR_ES62
ICONIA_Tab_W500-C52G03iss	EMEA	Belgium	LE.RHC02.025	ICONIA_Tab_W500-C52G03iss W7HP32ISBE1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_NL11
ICONIA_Tab_W500-C52G03iss	EMEA	Spain	LE.RHC02.043	ICONIA_Tab_W500-C52G03iss W7HP32ISES1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES51
ICONIA_Tab_W500-C52G03iss	EMEA	Holland	LE.RHC02.033	ICONIA_Tab_W500-C52G03iss W7HP32ISNL1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_NL11
ICONIA_Tab_W500-C52G03iss	AAP	Korea	LE.RHC02.052	ICONIA_Tab_W500-C52G03iss W7HP32KISKR1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_KO11
ICONIA_Tab_W500-C52G03iss	EMEA	Czech	LE.RHC02.028	ICONIA_Tab_W500-C52G03iss W7HP32ISCZ2 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SK11
ICONIA_Tab_W500-C52G03iss	AAP	Vietnam	LE.RHC02.056	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISVN1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Indonesia	LE.RHC02.055	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISID1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ID21NEW
ICONIA_Tab_W500-C52G03iss	EMEA	Russia	LE.RHC02.002	ICONIA_Tab_W500-C52G03iss W7HP32RUISRU1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RU11

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.007	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISMEB MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_AR91
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.014	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME4 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Philippines	LE.RHC03.002	ICONIA_Tab_W500-C52G03iss EM W7PR32EMISPH1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Philippines	LE.RHC02.047	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISPH1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Indonesia	LE.RHC02.051	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISID1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ID21
ICONIA_Tab_W500-C52G03iss	AAP	Singapore	LE.RHC02.054	ICONIA_Tab_W500-C52G03iss W7HP32ISSG1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ZH31
ICONIA_Tab_W500-C52G03iss	AAP	Singapore	LE.RHC02.053	ICONIA_Tab_W500-C52G03iss W7HP32ISSG1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	Ukraine	LE.RHC02.003	ICONIA_Tab_W500-C52G03iss W7HP32RUISUK1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RU61
ICONIA_Tab_W500-C52G03iss	EMEA	Russia	LE.RHC02.001	ICONIA_Tab_W500-C52G03iss W7HP32RUISRU1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	EMEA	Turkey	LE.RHC02.019	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISTR1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_TR31
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.004	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISMEC MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.005	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISMEB MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.012	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME9 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.013	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME6 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.006	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME3 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.011	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME2 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.008	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARA1
ICONIA_Tab_W500-C52G03iss	EMEA	Middle East	LE.RHC02.009	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISME1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_AR91

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	EMEA	Algeria	LE.RHC02.010	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISDZ1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ARB1
ICONIA_Tab_W500-C52G03iss	EMEA	South Africa	LE.RHC02.017	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISZA5 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	AAP	Japan	LE.RHC02.048	ICONIA_Tab_W500-C52G03iss W7HP32JJP1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_JA11
ICONIA_Tab_W500-C52G03iss	PA	USA	LE.RHC02.046	ICONIA_Tab_W500-C52G03iss W7HP32ISUS1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FRB1
ICONIA_Tab_W500-C52G03iss	CHINA	Hong Kong	LE.RHC02.050	ICONIA_Tab_W500-C52G03iss W7HP32ISHK2 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ZH31
ICONIA_Tab_W500-C52G03iss	CHINA	China	LE.RHC02.049	ICONIA_Tab_W500-C52G03iss W7HP32SCISCN1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SC11
ICONIA_Tab_W500-C52G03iss	EMEA	South Africa	LE.RHC02.018	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISZA4 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	South Africa	LE.RHC02.016	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISZA2 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	South Africa	LE.RHC02.015	ICONIA_Tab_W500-C52G03iss EM W7HP32EMISZA1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES81

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	EMEA	UK	LE.RHC02.045	ICONIA_Tab_W500-C52G03iss W7HP32ISGB1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_EN11
ICONIA_Tab_W500-C52G03iss	EMEA	Switzerland	LE.RHC02.044	ICONIA_Tab_W500-C52G03iss W7HP32ISCH1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT41
ICONIA_Tab_W500-C52G03iss	EMEA	Poland	LE.RHC02.038	ICONIA_Tab_W500-C52G03iss W7HP32ISPL1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_PL11
ICONIA_Tab_W500-C52G03iss	EMEA	Italy	LE.RHC02.036	ICONIA_Tab_W500-C52G03iss W7HP32ISIT1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT11
ICONIA_Tab_W500-C52G03iss	EMEA	Israel	LE.RHC02.035	ICONIA_Tab_W500-C52G03iss W7HP32ISIL1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_HE71
ICONIA_Tab_W500-C52G03iss	EMEA	Greece	LE.RHC02.032	ICONIA_Tab_W500-C52G03iss W7HP32ISGR1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_EL31
ICONIA_Tab_W500-C52G03iss	EMEA	Cyprus	LE.RHC02.027	ICONIA_Tab_W500-C52G03iss W7HP32ISCY1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ES61
ICONIA_Tab_W500-C52G03iss	EMEA	Portugal	LE.RHC02.039	ICONIA_Tab_W500-C52G03iss W7HP32ISPT1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_PT11
ICONIA_Tab_W500-C52G03iss	EMEA	Hungary	LE.RHC02.034	ICONIA_Tab_W500-C52G03iss W7HP32ISHU1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_HU11

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	EMEA	Baltic	LE.RHC02.023	ICONIA_Tab_W500-C52G03iss W7HP32ISBC4 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_LT11
ICONIA_Tab_W500-C52G03iss	EMEA	Baltic	LE.RHC02.022	ICONIA_Tab_W500-C52G03iss W7HP32ISBC5 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_LT11
ICONIA_Tab_W500-C52G03iss	EMEA	Baltic	LE.RHC02.024	ICONIA_Tab_W500-C52G03iss W7HP32ISBC3 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SV21
ICONIA_Tab_W500-C52G03iss	EMEA	Slovenia/Croatia	LE.RHC02.042	ICONIA_Tab_W500-C52G03iss W7HP32ISSI1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_SL11
ICONIA_Tab_W500-C52G03iss	EMEA	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500-C52G03iss W7HP32ISBA1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_A151
ICONIA_Tab_W500-C52G03iss	EMEA	Romania	LE.RHC02.040	ICONIA_Tab_W500-C52G03iss W7HP32ISRO2 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RO11
ICONIA_Tab_W500-C52G03iss	EMEA	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500-C52G03iss W7HP32ISBG1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_RO11
ICONIA_Tab_W500-C52G03iss	EMEA	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500-C52G03iss W7HP32ISAL1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_A111
ICONIA_Tab_W500-C52G03iss	EMEA	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500-C52G03iss W7HP32ISLU3 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_IT41

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W500-C52G03iss	EMEA	Austria	LE.RHC02.021	ICONIA_Tab_W500-C52G03iss W7HP32ISAT1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_DE61
ICONIA_Tab_W500-C52G03iss	EMEA	Germany	LE.RHC02.031	ICONIA_Tab_W500-C52G03iss W7HP32ISDE1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_DE11
ICONIA_Tab_W500-C52G03iss	EMEA	France	LE.RHC02.030	ICONIA_Tab_W500-C52G03iss W7HP32ISFR1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_FR21
ICONIA_Tab_W500-C52G03iss	EMEA	Denmark	LE.RHC02.029	ICONIA_Tab_W500-C52G03iss W7HP32ISDK2 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_ENS1
ICONIA_Tab_W500-C52G03iss	AAP	Japan	LE.RHC03.001	ICONIA_Tab_W500-C52G03iss W7PR32IJP1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_CIMR_JA11
ICONIA_Tab_W500-C52G03iss	WW	WW	S2.RHC02.003	ICONIA_Tab_W500-C52G03iss W7HP32ISWW1 MC Tab_W500_UMACss_3 1*2G/32G/3L3.26/2R/CBT_GN_1.3HD_CIMR_ES61
Tab-C52G03iss	WW	WW	S2.RHC02.001	Tab-C52G03iss EM W7HP64ISWW1 MC UMACss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD_HG_ES62
Tab-C52G03iss	WW	WW	S2.RHC02.002	Tab-C52G03iss EM W7HP64ISWW1 MC UMACss_3 1*2G/32G/3L3.26/2R/CBT_GN_1.3HD_HG_ES62
ICONIA_Tab_W501P-C52G03iss	AAP	Thailand	LE.L0903.048	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISTH1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_TH71

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	AAP	Singapore	LE.L0903.047	ICONIA_Tab_W501P-C52G03iss W7PR32ISSG1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ZH31
ICONIA_Tab_W501P-C52G03iss	AAP	Singapore	LE.L0903.046	ICONIA_Tab_W501P-C52G03iss W7PR32ISSG1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Ukraine	LE.L0903.003	ICONIA_Tab_W501P-C52G03iss W7PR32RUISUK1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RU61
ICONIA_Tab_W501P-C52G03iss	EMEA	Russia	LE.L0903.001	ICONIA_Tab_W501P-C52G03iss W7PR32RUISRU1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RU11
ICONIA_Tab_W501P-C52G03iss	EMEA	Russia	LE.L0903.002	ICONIA_Tab_W501P-C52G03iss W7PR32RUISRU1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Turkey	LE.L0903.021	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISTR1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_TR31
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.011	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISMEC MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARA1

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.013	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISMEB MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_AR91
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.010	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISMEB MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARA1
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.009	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME9 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES81
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.006	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME6 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.012	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME4 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.005	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME3 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES81
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.014	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME2 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARA1

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.007	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARA1
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0903.008	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_AR91
ICONIA_Tab_W501P-C52G03iss	EMEA	Algeria	LE.L0903.004	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISDZ1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARB1
ICONIA_Tab_W501P-C52G03iss	EMEA	South Africa	LE.L0903.022	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISZA5 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	South Africa	LE.L0903.019	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISZA4 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	South Africa	LE.L0903.020	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISZA2 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	South Africa	LE.L0903.018	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISZA1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES81

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	UK	LE.L0903.045	ICONIA_Tab_W501P-C52G03iss W7PR32ISGB1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_EN11
ICONIA_Tab_W501P-C52G03iss	EMEA	Switzerland	LE.L0903.044	ICONIA_Tab_W501P-C52G03iss W7PR32ISCH1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT41
ICONIA_Tab_W501P-C52G03iss	EMEA	Poland	LE.L0903.038	ICONIA_Tab_W501P-C52G03iss W7PR32ISPL1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_PL11
ICONIA_Tab_W501P-C52G03iss	EMEA	Italy	LE.L0903.036	ICONIA_Tab_W501P-C52G03iss W7PR32ISIT1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT11
ICONIA_Tab_W501P-C52G03iss	EMEA	Israel	LE.L0903.035	ICONIA_Tab_W501P-C52G03iss W7PR32ISIL1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_HE71
ICONIA_Tab_W501P-C52G03iss	EMEA	Baltic	LE.L0903.024	ICONIA_Tab_W501P-C52G03iss W7PR32ISBC4 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_LT11
ICONIA_Tab_W501P-C52G03iss	EMEA	Greece	LE.L0903.032	ICONIA_Tab_W501P-C52G03iss W7PR32ISGR1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_EL31

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Spain	LE.L0903.043	ICONIA_Tab_W501P-C52G03iss W7PR32ISES1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES51
ICONIA_Tab_W501P-C52G03iss	EMEA	Cyprus	LE.L0903.027	ICONIA_Tab_W501P-C52G03iss W7PR32ISCY1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Portugal	LE.L0903.039	ICONIA_Tab_W501P-C52G03iss W7PR32ISPT1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_PT11
ICONIA_Tab_W501P-C52G03iss	EMEA	Hungary	LE.L0903.034	ICONIA_Tab_W501P-C52G03iss W7PR32ISHU1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_HU11
ICONIA_Tab_W501P-C52G03iss	EMEA	Baltic	LE.L0903.017	ICONIA_Tab_W501P-C52G03iss W7PR32ISBC5 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_LT11
ICONIA_Tab_W501P-C52G03iss	EMEA	Baltic	LE.L0903.023	ICONIA_Tab_W501P-C52G03iss W7PR32ISBC3 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SV21
ICONIA_Tab_W501P-C52G03iss	EMEA	Serbia/Bosni a-Herzegov ina	LE.L0903.041	ICONIA_Tab_W501P-C52G03iss W7PR32ISBA1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_A151

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P-C52G03iss W7PR32ISS11 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SL11
ICONIA_Tab_W501P-C52G03iss	EMEA	Romania	LE.L0903.040	ICONIA_Tab_W501P-C52G03iss W7PR32ISRO2 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RO11
ICONIA_Tab_W501P-C52G03iss	EMEA	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P-C52G03iss W7PR32ISBG1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RO11
ICONIA_Tab_W501P-C52G03iss	EMEA	Albania/Macedonia	LE.L0903.015	ICONIA_Tab_W501P-C52G03iss W7PR32ISAL1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_A111
ICONIA_Tab_W501P-C52G03iss	EMEA	Czech	LE.L0903.028	ICONIA_Tab_W501P-C52G03iss W7PR32ISCZ2 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SK11
ICONIA_Tab_W501P-C52G03iss	EMEA	Austria	LE.L0903.016	ICONIA_Tab_W501P-C52G03iss W7PR32ISAT1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_DE61
ICONIA_Tab_W501P-C52G03iss	EMEA	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P-C52G03iss W7PR32ISLU3 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT41

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Holland	LE.L0903.033	ICONIA_Tab_W501P-C52G03iss W7PR32ISNL1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_NL11
ICONIA_Tab_W501P-C52G03iss	EMEA	Belgium	LE.L0903.025	ICONIA_Tab_W501P-C52G03iss W7PR32ISBE1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_NL11
ICONIA_Tab_W501P-C52G03iss	EMEA	Germany	LE.L0903.031	ICONIA_Tab_W501P-C52G03iss W7PR32ISDE1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_DE11
ICONIA_Tab_W501P-C52G03iss	EMEA	France	LE.L0903.030	ICONIA_Tab_W501P-C52G03iss W7PR32ISFR1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_FR21
ICONIA_Tab_W501P-C52G03iss	EMEA	Denmark	LE.L0903.029	ICONIA_Tab_W501P-C52G03iss W7PR32ISDK2 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ENS1
ICONIA_Tab_W501P-C52G03iss	AAP	Australia/New Zealand	LE.L0903.049	ICONIA_Tab_W501P-C52G03iss W7PR32ISAU1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	WW	WW	S2.L0903.001	ICONIA_Tab_W501P-C52G03iss W7PR32ISWW1 MC Tab_W501P_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	AAP	Singapore	LE.L0A03.047	ICONIA_Tab_W501P-C52G03iss W7PR32ISSG1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ZH31
ICONIA_Tab_W501P-C52G03iss	AAP	Singapore	LE.L0A03.046	ICONIA_Tab_W501P-C52G03iss W7PR32ISSG1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P-C52G03iss W7PR32RUISUK1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RU61
ICONIA_Tab_W501P-C52G03iss	EMEA	Russia	LE.L0A03.001	ICONIA_Tab_W501P-C52G03iss W7PR32RUISRU1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RU11
ICONIA_Tab_W501P-C52G03iss	EMEA	Russia	LE.L0A03.002	ICONIA_Tab_W501P-C52G03iss W7PR32RUISRU1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Turkey	LE.L0A03.019	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISTR1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_TR31
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.011	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISMEC MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARA1

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.013	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISMEB MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_AR91
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.010	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISMEB MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARA1
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.009	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME9 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES81
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.006	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME6 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.012	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME4 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.005	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME3 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES81
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.014	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME2 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARA1

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.007	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARA1
ICONIA_Tab_W501P-C52G03iss	EMEA	Middle East	LE.L0A03.008	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISME1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_AR91
ICONIA_Tab_W501P-C52G03iss	EMEA	Algeria	LE.L0A03.004	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISDZ1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ARB1
ICONIA_Tab_W501P-C52G03iss	EMEA	South Africa	LE.L0A03.015	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISZA5 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	South Africa	LE.L0A03.017	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISZA4 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	South Africa	LE.L0A03.018	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISZA2 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	South Africa	LE.L0A03.016	ICONIA_Tab_W501P-C52G03iss EM W7PR32EMISZA1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES81

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	UK	LE.L0A03.045	ICONIA_Tab_W501P-C52G03iss W7PR32ISGB1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_EN11
ICONIA_Tab_W501P-C52G03iss	EMEA	Switzerland	LE.L0A03.044	ICONIA_Tab_W501P-C52G03iss W7PR32ISCH1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT41
ICONIA_Tab_W501P-C52G03iss	EMEA	Poland	LE.L0A03.038	ICONIA_Tab_W501P-C52G03iss W7PR32ISPL1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_PL11
ICONIA_Tab_W501P-C52G03iss	EMEA	Italy	LE.L0A03.036	ICONIA_Tab_W501P-C52G03iss W7PR32ISIT1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT11
ICONIA_Tab_W501P-C52G03iss	EMEA	Israel	LE.L0A03.035	ICONIA_Tab_W501P-C52G03iss W7PR32ISIL1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_HE71
ICONIA_Tab_W501P-C52G03iss	EMEA	Baltic	LE.L0A03.024	ICONIA_Tab_W501P-C52G03iss W7PR32ISBC4 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_LT11
ICONIA_Tab_W501P-C52G03iss	EMEA	Greece	LE.L0A03.032	ICONIA_Tab_W501P-C52G03iss W7PR32ISGR1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_EL31

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Spain	LE.L0A03.043	ICONIA_Tab_W501P-C52G03iss W7PR32ISES1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES51
ICONIA_Tab_W501P-C52G03iss	EMEA	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P-C52G03iss W7PR32ISCY1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501P-C52G03iss	EMEA	Portugal	LE.L0A03.042	ICONIA_Tab_W501P-C52G03iss W7PR32ISPT1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_PT11
ICONIA_Tab_W501P-C52G03iss	EMEA	Hungary	LE.L0A03.034	ICONIA_Tab_W501P-C52G03iss W7PR32ISHU1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_HU11
ICONIA_Tab_W501P-C52G03iss	EMEA	Baltic	LE.L0A03.022	ICONIA_Tab_W501P-C52G03iss W7PR32ISBC5 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_LT11
ICONIA_Tab_W501P-C52G03iss	EMEA	Baltic	LE.L0A03.023	ICONIA_Tab_W501P-C52G03iss W7PR32ISBC3 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SV21
ICONIA_Tab_W501P-C52G03iss	EMEA	Serbia/Bosni a-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P-C52G03iss W7PR32ISBA1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_A151

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Slovenia/Croatia	LE.L0A03.041	ICONIA_Tab_W501P-C52G03iss W7PR32ISS11 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SL11
ICONIA_Tab_W501P-C52G03iss	EMEA	Romania	LE.L0A03.039	ICONIA_Tab_W501P-C52G03iss W7PR32ISRO2 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RO11
ICONIA_Tab_W501P-C52G03iss	EMEA	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P-C52G03iss W7PR32ISBG1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RO11
ICONIA_Tab_W501P-C52G03iss	EMEA	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P-C52G03iss W7PR32ISAL1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_A111
ICONIA_Tab_W501P-C52G03iss	EMEA	Czech	LE.L0A03.027	ICONIA_Tab_W501P-C52G03iss W7PR32ISCZ2 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SK11
ICONIA_Tab_W501P-C52G03iss	EMEA	Austria	LE.L0A03.021	ICONIA_Tab_W501P-C52G03iss W7PR32ISAT1 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_DE61
ICONIA_Tab_W501P-C52G03iss	EMEA	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P-C52G03iss W7PR32ISLU3 MC Tab_W501P_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT41

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501P-C52G03iss	EMEA	Holland	LE.L0A03.033	ICONIA_Tab_W501P-C52G03iss W7PR32ISNL1 MC Tab_W501P_UMAGCcss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_NL11
ICONIA_Tab_W501P-C52G03iss	EMEA	Belgium	LE.L0A03.025	ICONIA_Tab_W501P-C52G03iss W7PR32ISBE1 MC Tab_W501P_UMAGCcss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_NL11
ICONIA_Tab_W501P-C52G03iss	EMEA	Germany	LE.L0A03.031	ICONIA_Tab_W501P-C52G03iss W7PR32ISDE1 MC Tab_W501P_UMAGCcss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_DE11
ICONIA_Tab_W501P-C52G03iss	EMEA	France	LE.L0A03.030	ICONIA_Tab_W501P-C52G03iss W7PR32ISFR1 MC Tab_W501P_UMAGCcss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_FR21
ICONIA_Tab_W501P-C52G03iss	EMEA	Denmark	LE.L0A03.028	ICONIA_Tab_W501P-C52G03iss W7PR32ISDK2 MC Tab_W501P_UMAGCcss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ENS1
ICONIA_Tab_W501P-C52G03iss	WW	WW	S2.L0A03.001	ICONIA_Tab_W501P-C52G03iss W7PR32ISWW1 MC Tab_W501P_UMAGCcss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	AAP	India	LE.L0602.034	ICONIA_Tab_W501-C52G03iss W7HP32INISIN1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	EMEA	UK	LE.L0602.026	ICONIA_Tab_W501-C52G03iss W7HP32ISGB1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_EN11
ICONIA_Tab_W501-C52G03iss	CHINA	Hong Kong	LE.L0602.031	ICONIA_Tab_W501-C52G03iss W7HP32ISHK2 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ZH31
ICONIA_Tab_W501-C52G03iss	AAP	Vietnam	LE.L0602.035	ICONIA_Tab_W501-C52G03iss EM W7HP32EMISVN1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	AAP	Thailand	LE.L0602.029	ICONIA_Tab_W501-C52G03iss EM W7HP32EMISTH1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_TH71
ICONIA_Tab_W501-C52G03iss	AAP	Malaysia	LE.L0602.028	ICONIA_Tab_W501-C52G03iss EM W7HP32EMISMY1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	AAP	Philippines	LE.L0602.027	ICONIA_Tab_W501-C52G03iss EM W7HP32EMISPH1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	AAP	Singapore	LE.L0602.033	ICONIA_Tab_W501-C52G03iss W7HP32ISSG1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ZH31

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	AAP	Singapore	LE.L0602.032	ICONIA_Tab_W501-C52G03iss W7HP32ISSG1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	EMEA	Denmark	LE.L0602.010	ICONIA_Tab_W501-C52G03iss W7HP32ISDK2 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ENS1
ICONIA_Tab_W501-C52G03iss	EMEA	Switzerland	LE.L0602.025	ICONIA_Tab_W501-C52G03iss W7HP32ISCH1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT41
ICONIA_Tab_W501-C52G03iss	EMEA	Poland	LE.L0602.019	ICONIA_Tab_W501-C52G03iss W7HP32ISPL1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_PL11
ICONIA_Tab_W501-C52G03iss	EMEA	Italy	LE.L0602.017	ICONIA_Tab_W501-C52G03iss W7HP32ISIT1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT11
ICONIA_Tab_W501-C52G03iss	EMEA	Israel	LE.L0602.016	ICONIA_Tab_W501-C52G03iss W7HP32ISIL1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_HE71
ICONIA_Tab_W501-C52G03iss	EMEA	Greece	LE.L0602.013	ICONIA_Tab_W501-C52G03iss W7HP32ISGR1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_EL31

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	EMEA	Cyprus	LE.L0602.008	ICONIA_Tab_W501-C52G03iss W7HP32ISCY1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	EMEA	Spain	LE.L0602.024	ICONIA_Tab_W501-C52G03iss W7HP32ISES1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES51
ICONIA_Tab_W501-C52G03iss	EMEA	Portugal	LE.L0602.020	ICONIA_Tab_W501-C52G03iss W7HP32ISPT1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_PT11
ICONIA_Tab_W501-C52G03iss	EMEA	Hungary	LE.L0602.015	ICONIA_Tab_W501-C52G03iss W7HP32ISHU1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_HU11
ICONIA_Tab_W501-C52G03iss	EMEA	Baltic	LE.L0602.004	ICONIA_Tab_W501-C52G03iss W7HP32ISBC4 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_LT11
ICONIA_Tab_W501-C52G03iss	EMEA	Baltic	LE.L0602.003	ICONIA_Tab_W501-C52G03iss W7HP32ISBC5 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_LT11
ICONIA_Tab_W501-C52G03iss	EMEA	Baltic	LE.L0602.005	ICONIA_Tab_W501-C52G03iss W7HP32ISBC3 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SV21

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	EMEA	Slovenia/Croatia	LE.L0602.023	ICONIA_Tab_W501-C52G03iss W7HP32ISS11 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SL11
ICONIA_Tab_W501-C52G03iss	EMEA	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501-C52G03iss W7HP32ISBA1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_A151
ICONIA_Tab_W501-C52G03iss	EMEA	Romania	LE.L0602.021	ICONIA_Tab_W501-C52G03iss W7HP32ISRO2 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RO11
ICONIA_Tab_W501-C52G03iss	EMEA	Bulgaria	LE.L0602.007	ICONIA_Tab_W501-C52G03iss W7HP32ISBG1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RO11
ICONIA_Tab_W501-C52G03iss	EMEA	Czech	LE.L0602.009	ICONIA_Tab_W501-C52G03iss W7HP32ISCZ2 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SK11
ICONIA_Tab_W501-C52G03iss	EMEA	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501-C52G03iss W7HP32ISAL1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_A111
ICONIA_Tab_W501-C52G03iss	EMEA	Luxembourg	LE.L0602.018	ICONIA_Tab_W501-C52G03iss W7HP32ISLU3 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT41

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	EMEA	Austria	LE.L0602.002	ICONIA_Tab_W501-C52G03iss W7HP32ISAT1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_DE61
ICONIA_Tab_W501-C52G03iss	EMEA	Holland	LE.L0602.014	ICONIA_Tab_W501-C52G03iss W7HP32ISNL1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_NL11
ICONIA_Tab_W501-C52G03iss	EMEA	Belgium	LE.L0602.006	ICONIA_Tab_W501-C52G03iss W7HP32ISBE1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_NL11
ICONIA_Tab_W501-C52G03iss	EMEA	Germany	LE.L0602.012	ICONIA_Tab_W501-C52G03iss W7HP32ISDE1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_DE11
ICONIA_Tab_W501-C52G03iss	EMEA	France	LE.L0602.011	ICONIA_Tab_W501-C52G03iss W7HP32ISFR1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_FR21
ICONIA_Tab_W501-C52G03iss	AAP	Australia/New Zealand	LE.L0602.030	ICONIA_Tab_W501-C52G03iss W7HP32ISAU1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	WW	WW	S2.L0602.001	ICONIA_Tab_W501-C52G03iss W7HP32ISWW1 MC Tab_W501_UMAGCcssK_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	EMEA	UK	LE.RK502.023	ICONIA_Tab_W501-C52G03iss W7HP32ISGB1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_EN11
ICONIA_Tab_W501-C52G03iss	AAP	Vietnam	LE.RK502.031	ICONIA_Tab_W501-C52G03iss EM W7HP32EMISVN1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	AAP	Philippines	LE.RK503.001	ICONIA_Tab_W501-C52G03iss EM W7PR32EMISPH1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	AAP	Indonesia	LE.RK503.002	ICONIA_Tab_W501-C52G03iss EM W7PR32EMISID1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD_E77R2_CIMR_ID21
ICONIA_Tab_W501-C52G03iss	AAP	Philippines	LE.RK502.027	ICONIA_Tab_W501-C52G03iss EM W7HP32EMISPH1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	AAP	Singapore	LE.RK502.030	ICONIA_Tab_W501-C52G03iss W7HP32ISSG1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ZH31
ICONIA_Tab_W501-C52G03iss	AAP	Singapore	LE.RK502.029	ICONIA_Tab_W501-C52G03iss W7HP32ISSG1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61
ICONIA_Tab_W501-C52G03iss	EMEA	Denmark	LE.RK502.010	ICONIA_Tab_W501-C52G03iss W7HP32ISDK2 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ENS1

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	CHINA	Hong Kong	LE.RK502.028	ICONIA_Tab_W501-C52G03iss W7HP32ISHK2 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ZH31
ICONIA_Tab_W501-C52G03iss	EMEA	Switzerland	LE.RK502.022	ICONIA_Tab_W501-C52G03iss W7HP32ISCH1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT41
ICONIA_Tab_W501-C52G03iss	EMEA	Poland	LE.RK502.019	ICONIA_Tab_W501-C52G03iss W7HP32ISPL1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_PL11
ICONIA_Tab_W501-C52G03iss	EMEA	Italy	LE.RK502.017	ICONIA_Tab_W501-C52G03iss W7HP32ISIT1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT11
ICONIA_Tab_W501-C52G03iss	EMEA	Israel	LE.RK502.016	ICONIA_Tab_W501-C52G03iss W7HP32ISIL1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_HE71
ICONIA_Tab_W501-C52G03iss	EMEA	Greece	LE.RK502.013	ICONIA_Tab_W501-C52G03iss W7HP32ISGR1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_EL31
ICONIA_Tab_W501-C52G03iss	EMEA	Cyprus	LE.RK502.008	ICONIA_Tab_W501-C52G03iss W7HP32ISCY1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	EMEA	Spain	LE.RK502.021	ICONIA_Tab_W501-C52G03iss W7HP32ISES1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_ES51
ICONIA_Tab_W501-C52G03iss	EMEA	Portugal	LE.RK502.024	ICONIA_Tab_W501-C52G03iss W7HP32ISPT1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_PT11
ICONIA_Tab_W501-C52G03iss	EMEA	Hungary	LE.RK502.015	ICONIA_Tab_W501-C52G03iss W7HP32ISHU1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_HU11
ICONIA_Tab_W501-C52G03iss	EMEA	Baltic	LE.RK502.004	ICONIA_Tab_W501-C52G03iss W7HP32ISBC4 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_LT11
ICONIA_Tab_W501-C52G03iss	EMEA	Baltic	LE.RK502.003	ICONIA_Tab_W501-C52G03iss W7HP32ISBC5 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_LT11
ICONIA_Tab_W501-C52G03iss	EMEA	Baltic	LE.RK502.005	ICONIA_Tab_W501-C52G03iss W7HP32ISBC3 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SV21
ICONIA_Tab_W501-C52G03iss	EMEA	Slovenia/Croatia	LE.RK502.020	ICONIA_Tab_W501-C52G03iss W7HP32ISSI1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SL11

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	EMEA	Serbia/Bosnia-Herzegovina	LE.RK502.026	ICONIA_Tab_W501-C52G03iss W7HP32ISBA1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_A151
ICONIA_Tab_W501-C52G03iss	EMEA	Romania	LE.RK502.025	ICONIA_Tab_W501-C52G03iss W7HP32ISRO2 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RO11
ICONIA_Tab_W501-C52G03iss	EMEA	Bulgaria	LE.RK502.007	ICONIA_Tab_W501-C52G03iss W7HP32ISBG1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_RO11
ICONIA_Tab_W501-C52G03iss	EMEA	Czech	LE.RK502.009	ICONIA_Tab_W501-C52G03iss W7HP32ISCZ2 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_SK11
ICONIA_Tab_W501-C52G03iss	EMEA	Albania/Macedonia	LE.RK502.001	ICONIA_Tab_W501-C52G03iss W7HP32ISAL1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_A111
ICONIA_Tab_W501-C52G03iss	EMEA	Luxembourg	LE.RK502.018	ICONIA_Tab_W501-C52G03iss W7HP32ISLU3 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_IT41
ICONIA_Tab_W501-C52G03iss	EMEA	Austria	LE.RK502.002	ICONIA_Tab_W501-C52G03iss W7HP32ISAT1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_DE61

Table 7-1. Model Definition

Model	RO	Country	Acer Part No	Description
ICONIA_Tab_W501-C52G03iss	EMEA	Holland	LE.RK502.01 4	ICONIA_Tab_W501-C52G03iss W7HP32ISNL1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_NL11
ICONIA_Tab_W501-C52G03iss	EMEA	Belgium	LE.RK502.00 6	ICONIA_Tab_W501-C52G03iss W7HP32ISBE1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_NL11
ICONIA_Tab_W501-C52G03iss	EMEA	Germany	LE.RK502.01 2	ICONIA_Tab_W501-C52G03iss W7HP32ISDE1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_DE11
ICONIA_Tab_W501-C52G03iss	EMEA	France	LE.RK502.01 1	ICONIA_Tab_W501-C52G03iss W7HP32ISFR1 MC Tab_W501_UMAGCss_3 1*2G/32G/3L3.26/2R/CBT_GNBT_1.3HD1.3M HD_E77R2_CIMR_FR21
ICONIA_Tab_W500-C52G06iss	WW	WW	S2.RK502.00 1	ICONIA_Tab_W500-C52G06iss W7HP32ISWW1 MC Tab_W500_UMAGCss_3 1*2G/64G/3L3.26/2R/CBT_GN_1.3HD_E77R2_CIMR_ES61

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500P-C5 2G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMACssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0803.026	ICONIA_Tab_W500P_UMACssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMACssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMACssK_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMACss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500P-C5 2G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMACss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMACss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bo snia-Herz egovina	LE.L0703.041	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/ Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Albania/M acedonia	LE.L0703.020	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Luxembou rg	LE.L0703.037	ICONIA_Tab_W500P_UMACss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500P-C5 2G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500P-C5 2G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Australia/ New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_UMACssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_UMACssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500-C52 G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	China	LE.RK602.052	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMACssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Slovenia/ Croatia	LE.RK602.023	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Serbia/Bo snia-Herz egovina	LE.RK602.022	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Albania/M acedonia	LE.RK602.002	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Luxembou rg	LE.RK602.018	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMACssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500-C52 G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500_UMACssK_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Belgium	LE.RHC02.025	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RHC02.043	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RHC02.033	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Korea	LE.RHC02.052	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RHC02.028	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RHC02.056	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.055	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RHC02.002	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.007	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.014	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC03.002	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC02.047	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.051	ICONIA_Tab_W500_UMACss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RHC02.05 4	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RHC02.05 3	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Ukraine	LE.RHC02.00 3	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RHC02.00 1	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Turkey	LE.RHC02.01 9	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 4	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 5	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 2	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 3	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 6	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 1	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 8	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 9	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Algeria	LE.RHC02.01 0	ICONIA_Tab_W500_UMACss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.017	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Japan	LE.RHC02.048	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	USA	LE.RHC02.046	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Hong Kong	LE.RHC02.050	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	China	LE.RHC02.049	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.018	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.016	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.015	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	UK	LE.RHC02.045	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RHC02.044	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RHC02.038	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RHC02.036	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RHC02.035	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RHC02.032	ICONIA_Tab_W500_UMACss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RHC02.027	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RHC02.039	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RHC02.034	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.023	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.022	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.024	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Slovenia/Croatia	LE.RHC02.042	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Romania	LE.RHC02.040	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Austria	LE.RHC02.021	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52 G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	AMDC50B
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	AMDC50B
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	AMDC50B
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0903.044	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0903.041	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Albania/Macedonia	LE.L0903.015	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Australia/New Zealand	LE.L0903.049	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0A03.044	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAGCss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bo snia-Herz egovina	LE.L0A03.040	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Slovenia/ Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Albania/M acedonia	LE.L0A03.020	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Luxembou rg	LE.L0A03.037	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501P-C5 2G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501P-C5 2G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAGCcss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGCcssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGCcssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGCcssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGCcssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGCcssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGCcssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Philippine s	LE.L0602.027	ICONIA_Tab_W501_UMAGCcssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGCcssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGCcssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501-C52 G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Slovenia/ Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Luxembourg	LE.L0602.018	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Australia/New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGCssK_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGCss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGCss_3	AMDC50B

Table 7-2. Model Definition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501-C52 G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Slovenia/ Croatia	LE.RK502.020	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Serbia/Bo snia-Herz egovina	LE.RK502.026	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Albania/M acedonia	LE.RK502.001	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Luxembou rg	LE.RK502.018	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52 G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501_UMAGCss_3	AMDC50B

Table 7-2. Model Difinition

Model	Country	Acer Part No	BOM Name	CPU
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGCss_3	AMDC50B
ICONIA_Tab_W500-C52G06iss	WW	S2.RK502.001	ICONIA_Tab_W501_UMAGCss_3	AMDC50B

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500P-C5 2G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0803.026	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500P-C5 2G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500P-C5 2G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500P-C5 2G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Australia /New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500-C52 G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	China	LE.RK602.052	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Slovenia /Croatia	LE.RK602.023	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Luxembourg	LE.RK602.018	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500-C52 G03iss	GCTWN	S2.RK602.00 1	ICONIA_Tab_W500_UMACssK_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Belgium	LE.RHC02.02 5	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RHC02.04 3	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RHC02.03 3	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Korea	LE.RHC02.05 2	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RHC02.02 8	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RHC02.05 6	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.05 5	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RHC02.00 2	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 7	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 4	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC03.00 2	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC02.04 7	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.05 1	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.054	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.053	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RHC02.003	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.001	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RHC02.019	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.004	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.005	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.012	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.013	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.006	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.011	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.008	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.009	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RHC02.010	ICONIA_Tab_W500_UMACss_3	H10.1WXGA w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.017	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Japan	LE.RHC02.048	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	USA	LE.RHC02.046	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Hong Kong	LE.RHC02.050	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	China	LE.RHC02.049	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.018	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.016	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.015	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	UK	LE.RHC02.045	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RHC02.044	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RHC02.038	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RHC02.036	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RHC02.035	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RHC02.032	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RHC02.027	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RHC02.039	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RHC02.034	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.023	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.022	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.024	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Slovenia /Croatia	LE.RHC02.042	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Romania	LE.RHC02.040	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Austria	LE.RHC02.021	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52 G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAGCssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0903.044	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0903.041	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Albania/ Macedonia	LE.L0903.015	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Australia/ New Zealand	LE.L0903.049	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P_UMAGCcss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0A03.044	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Slovenia /Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501P-C52G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGCssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGCssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501-C52 G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Slovenia /Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Luxembourg	LE.L0602.018	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Australia/New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGCcssK_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGCcss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501-C52 G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501-C52 G03iss	Spain	LE.RK502.02 1	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.RK502.02 4	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.RK502.01 5	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.00 4	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.00 3	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.00 5	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Slovenia /Croatia	LE.RK502.02 0	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Serbia/B osnia-He rzegovin a	LE.RK502.02 6	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Romania	LE.RK502.02 5	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.RK502.00 7	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Czech	LE.RK502.00 9	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Albania/ Macedo nia	LE.RK502.00 1	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Luxemb ourg	LE.RK502.01 8	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52 G03iss	Austria	LE.RK502.00 2	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP

Table 7-3. Model Definition

Model	Country	Acer Part No	BOM Name	LCD
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP
ICONIA_Tab_W500-C52G06iss	WW	S2.RK502.001	ICONIA_Tab_W501_UMAGCss_3	H10.1WXG A w/TP

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500P-C5 2G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMACssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0803.026	ICONIA_Tab_W500P_UMACssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMACssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMACssK_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMACss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500P-C5 2G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMACss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMACss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UMACss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500P-C5 2G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500P-C5 2G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Australia/ New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_UMACssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_UMACssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500-C52 G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	China	LE.RK602.052	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMACssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Slovenia/Croatia	LE.RK602.023	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Luxembourg	LE.RK602.018	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMACssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500-C52 G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500_UMACssK_3	UMA
ICONIA_Tab_W500-C52 G03iss	Belgium	LE.RHC02.025	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RHC02.043	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RHC02.033	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Korea	LE.RHC02.052	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RHC02.028	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RHC02.056	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.055	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RHC02.002	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.007	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.014	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC03.002	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC02.047	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.051	ICONIA_Tab_W500_UMACss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RHC02.054	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RHC02.053	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Ukraine	LE.RHC02.003	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RHC02.001	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Turkey	LE.RHC02.019	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.004	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.005	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.012	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.013	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.006	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.011	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.008	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.009	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Algeria	LE.RHC02.010	ICONIA_Tab_W500_UMACss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.017	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Japan	LE.RHC02.048	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	USA	LE.RHC02.046	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Hong Kong	LE.RHC02.050	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	China	LE.RHC02.049	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.018	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.016	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.015	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	UK	LE.RHC02.045	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RHC02.044	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RHC02.038	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RHC02.036	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RHC02.035	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RHC02.032	ICONIA_Tab_W500_UMACss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RHC02.027	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RHC02.039	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RHC02.034	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.023	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.022	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.024	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Slovenia/Croatia	LE.RHC02.042	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Romania	LE.RHC02.040	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Austria	LE.RHC02.021	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52 G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	UMA
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	UMA
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	UMA
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAGCssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAGCcssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAGCcssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0903.044	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0903.041	ICONIA_Tab_W501P_UMAGCssK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P_UMAGCssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Albania/Macedonia	LE.L0903.015	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Australia/New Zealand	LE.L0903.049	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UMAGCsshK_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P_UMAGCssh_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAGCss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0A03.044	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAGCss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAGCss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Slovenia/Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAGCcss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501P-C5 2G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501P-C5 2G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAGCcss_3	UMA
ICONIA_Tab_W501-C52 G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGCcssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGCcssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGCcssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGCcssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGCcssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGCcssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_UMAGCcssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGCcssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGCcssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501-C52 G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Slovenia/Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGCssK_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Luxembourg	LE.L0602.018	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	Australia/New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGCssK_3	UMA
ICONIA_Tab_W501-C52 G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGCss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501-C52 G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGCss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501-C52 G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Slovenia/Croatia	LE.RK502.020	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RK502.026	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Albania/Macedonia	LE.RK502.001	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Luxembourg	LE.RK502.018	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52 G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501_UMAGCss_3	UMA

Table 7-4. Model Definition

Model	Country	Acer Part No	BOM Name	VGA Chip
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGCss_3	UMA
ICONIA_Tab_W500-C52G06iss	WW	S2.RK502.001	ICONIA_Tab_W501_UMAGCss_3	UMA

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Switzerland	LE.L0803.026	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMAC ssK_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMACssK_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMAC ss_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500P-C52G03iss	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACss_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Australia/New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	China	LE.RK602.052	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMACs sK_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RK602.023	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RK602.018	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500_UMACs_sK_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RHC02.025	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Spain	LE.RHC02.043	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Holland	LE.RHC02.033	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500-C52G03iss	Korea	LE.RHC02.052	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Czech	LE.RHC02.028	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RHC02.056	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.055	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.002	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.007	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.014	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC03.002	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC02.047	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.051	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.054	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.053	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RHC02.003	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.001	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RHC02.019	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.004	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.005	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.012	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.013	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.006	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.011	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.008	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.009	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RHC02.010	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.017	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC02.048	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	USA	LE.RHC02.046	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RHC02.050	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	China	LE.RHC02.049	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.018	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.016	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.015	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	UK	LE.RHC02.045	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RHC02.044	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Poland	LE.RHC02.038	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Italy	LE.RHC02.036	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Israel	LE.RHC02.035	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Greece	LE.RHC02.032	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RHC02.027	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RHC02.039	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RHC02.034	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.023	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.022	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.024	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RHC02.042	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Romania	LE.RHC02.040	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Austria	LE.RHC02.021	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACs_s_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAG CsshK_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W50 1P-C52G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Switzerl and	LE.L0903.044	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Serbia/B osnia-H erzegov ina	LE.L0903.041	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Slovenia /Croatia	LE.L0903.042	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Romani a	LE.L0903.040	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W50 1P-C52G03iss	Albania/ Macedo nia	LE.L0903.015	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Luxemb ourg	LE.L0903.037	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	German y	LE.L0903.031	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Denmar k	LE.L0903.029	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Australi a/New Zealand	LE.L0903.049	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UMAG CssK_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Singapo re	LE.L0A03.047	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Singapo re	LE.L0A03.046	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Switzerl and	LE.L0A03.044	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W50 1P-C52G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Serbia/B osnia-H erzegov ina	LE.L0A03.040	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Slovenia /Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Romani a	LE.L0A03.039	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Albania/ Macedo nia	LE.L0A03.020	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Luxemb ourg	LE.L0A03.037	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	German y	LE.L0A03.031	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13
ICONIA_Tab_W50 1P-C52G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAG Css_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAGCss_3	CM2GbIII13
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W50 1-C52G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Slovenia /Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Serbia/B osnia-H erzegov ina	LE.L0602.022	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Romani a	LE.L0602.021	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Albania/ Macedo nia	LE.L0602.001	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Luxemb ourg	LE.L0602.018	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	German y	LE.L0602.012	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	Australi a/New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13
ICONIA_Tab_W50 1-C52G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGC ssK_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W501-C52G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13

Table 7-5. Model Definition

Model	Country	Acer Part No	BOM Name	Memory 1
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Slovenia/Croatia	LE.RK502.020	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK502.026	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Albania/Macedonia	LE.RK502.001	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.RK502.018	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13
ICONIA_Tab_W500-C52G06iss	WW	S2.RK502.001	ICONIA_Tab_W501_UMAGC ss_3	CM2GbIII13

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500P -C52G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UM ACssK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Switzerlan d	LE.L0803.026	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UM ACssK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500P -C52G03iss	Serbia/Bos nia-Herzeg ovina	LE.L0803.015	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Slovenia/C roatia	LE.L0803.024	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Albania/M acedonia	LE.L0803.001	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Luxembou rg	LE.L0803.020	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UM ACssK_3	F32GB
ICONIA_Tab_W500P -C52G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UM ACss_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UM ACss_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Switzerlan d	LE.L0703.043	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Serbia/Bos nia-Herzeg ovina	LE.L0703.041	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Slovenia/C roatia	LE.L0703.042	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Albania/M acedonia	LE.L0703.020	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P -C52G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UM ACss_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P-C52G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P-C52G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UM ACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Australia/New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMA CssK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500_UMA CssK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	China	LE.RK602.052	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMA C5sK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMA C5sK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RK602.023	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RK602.018	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500_UMA CssK_3	F32GB
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RHC02.025	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Spain	LE.RHC02.043	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Holland	LE.RHC02.033	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Korea	LE.RHC02.052	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Czech	LE.RHC02.028	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RHC02.056	ICONIA_Tab_W500_UMA Css_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.055	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.002	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.007	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.014	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC03.002	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC02.047	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.051	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.054	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.053	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RHC02.003	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.001	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RHC02.019	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.004	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.005	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.012	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.013	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.006	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.011	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.008	ICONIA_Tab_W500_UMA Css_3	F32GB
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.009	ICONIA_Tab_W500_UMA Css_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RHC02.010	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.017	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC02.048	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	USA	LE.RHC02.046	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RHC02.050	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	China	LE.RHC02.049	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.018	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.016	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.015	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	UK	LE.RHC02.045	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RHC02.044	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Poland	LE.RHC02.038	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Italy	LE.RHC02.036	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Israel	LE.RHC02.035	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Greece	LE.RHC02.032	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RHC02.027	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RHC02.039	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RHC02.034	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.023	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.022	ICONIA_Tab_W500_UMACss_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.024	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RHC02.042	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Romania	LE.RHC02.040	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Austria	LE.RHC02.021	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	F32GB
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	F32GB
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCcssK_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCcssK_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCcssK_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCcssK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Switzerlan d	LE.L0903.044	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W501P -C52G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Serbia/Bos nia-Herzeg ovina	LE.L0903.041	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Slovenia/C roatia	LE.L0903.042	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Albania/M acedonia	LE.L0903.015	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Luxembou rg	LE.L0903.037	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W501P -C52G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Australia/N ew Zealand	LE.L0903.049	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UM AGCcssK_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UM AGCcss_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Switzerlan d	LE.L0A03.044	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UM AGCcss_3	F32GB
ICONIA_Tab_W501P -C52G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UM AGCcss_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Slovenia/Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UM AGCss_3	F32GB
ICONIA_Tab_W501-C52G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMA GCssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMA GCssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMA GCssK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Slovenia/Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGCcssK_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W501-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.L0602.018	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	Australia/New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGCcssK_3	F32GB
ICONIA_Tab_W501-C52G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGCcss_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Slovenia/Croatia	LE.RK502.020	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK502.026	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501_UMAGCcss_3	F32GB

Table 7-6. Model Definition

Model	Country	Acer Part No	BOM Name	HDD 1(GB)
ICONIA_Tab_W501-C52G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Albania/Macedonia	LE.RK502.001	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.RK502.018	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGCcss_3	F32GB
ICONIA_Tab_W500-C52G06iss	WW	S2.RK502.001	ICONIA_Tab_W501_UMAGCcss_3	F64GB

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500P-C5_2G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5_2G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMACs_sK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0803.026	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMACs sK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500P-C5 2G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMACs s_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UMACs_s_3	2-in-1 card reader
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACs_s_3	2-in-1 card reader
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACs_s_3	2-in-1 card reader
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACs_s_3	2-in-1 card reader
ICONIA_Tab_W500P-C52G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACs_s_3	2-in-1 card reader
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACs_s_3	2-in-1 card reader
ICONIA_Tab_W500P-C52G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACs_s_3	2-in-1 card reader
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACs_s_3	2-in-1 card reader
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACs_s_3	2-in-1 card reader
ICONIA_Tab_W500-C52G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACss_K_3	2-in-1 card reader
ICONIA_Tab_W500-C52G03iss	Australia/New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACss_K_3	2-in-1 card reader
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACss_K_3	2-in-1 card reader
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACss_K_3	2-in-1 card reader
ICONIA_Tab_W500-C52G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACss_K_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	China	LE.RK602.052	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Slovenia/Croatia	LE.RK602.023	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Luxembourg	LE.RK602.018	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500-C52 G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500_UMACss K_3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Belgium	LE.RHC02.02 5	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RHC02.04 3	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RHC02.03 3	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Korea	LE.RHC02.05 2	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RHC02.02 8	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RHC02.05 6	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.05 5	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RHC02.00 2	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 7	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 4	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC03.00 2	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC02.04 7	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.05 1	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RHC02.05 4	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RHC02.05 3	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Ukraine	LE.RHC02.00 3	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RHC02.00 1	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Turkey	LE.RHC02.01 9	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 4	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 5	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 2	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 3	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 6	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 1	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 8	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 9	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500-C52 G03iss	Algeria	LE.RHC02.01 0	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.01 7	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Japan	LE.RHC02.04 8	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	USA	LE.RHC02.04 6	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Hong Kong	LE.RHC02.05 0	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	China	LE.RHC02.04 9	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.01 8	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.01 6	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.01 5	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	UK	LE.RHC02.04 5	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RHC02.04 4	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RHC02.03 8	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RHC02.03 6	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RHC02.03 5	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RHC02.03 2	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RHC02.02 7	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RHC02.03 9	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RHC02.03 4	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.02 3	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.02 2	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.02 4	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Slovenia/Croatia	LE.RHC02.04 2	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.04 1	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Romania	LE.RHC02.04 0	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Bulgaria	LE.RHC02.02 6	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Albania/Macedonia	LE.RHC02.02 0	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Luxembourg	LE.RHC02.03 7	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader
ICONIA_Tab_W500-C52 G03iss	Austria	LE.RHC02.02 1	ICONIA_Tab_W500_UMACss _3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W500-C52G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACss_3	2-in-1 card reader
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACss_3	2-in-1 card reader
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	2-in-1 card reader
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	2-in-1 card reader
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	2-in-1 card reader
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	2-in-1 card reader
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	2-in-1 card reader
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCssK_3	2-in-1 card reader
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCssK_3	2-in-1 card reader
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCssK_3	2-in-1 card reader
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCssK_3	2-in-1 card reader
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAGCssK_3	2-in-1 card reader
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAGCssK_3	2-in-1 card reader
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAGCssK_3	2-in-1 card reader
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAGCssK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0903.044	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0903.041	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501P-C5 2G03iss	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Albania/Macedonia	LE.L0903.015	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Australia/New Zealand	LE.L0903.049	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UMAG CsshK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0A03.044	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Slovenia/Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501P-C5 2G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAG Css_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501-C52 G03iss	Slovenia/Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Luxembourg	LE.L0602.018	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Australia/New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGCs sK_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501-C52 G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501-C52 G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Slovenia/Croatia	LE.RK502.020	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RK502.026	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Albania/Macedonia	LE.RK502.001	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52 G03iss	Luxembourg	LE.RK502.018	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader

Table 7-7. Model Definition

Model	Country	Acer Part No	BOM Name	Card Reader
ICONIA_Tab_W501-C52G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGCs_s_3	2-in-1 card reader

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C52G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C52G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C52G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0803.026	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500P-C5 2G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500P-C5 2G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500P-C5 2G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500P-C5 2G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500P-C5 2G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Australia/ New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	China	LE.RK602.052	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500-C52 G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Slovenia/Croatia	LE.RK602.023	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500-C52 G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Luxembourg	LE.RK602.018	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500_UMACssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Belgium	LE.RHC02.025	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Spain	LE.RHC02.043	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Holland	LE.RHC02.033	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Korea	LE.RHC02.052	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Czech	LE.RHC02.028	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500-C52 G03iss	Vietnam	LE.RHC02.05 6	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.05 5	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RHC02.00 2	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 7	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 4	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC03.00 2	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Philippines	LE.RHC02.04 7	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Indonesia	LE.RHC02.05 1	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RHC02.05 4	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Singapore	LE.RHC02.05 3	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Ukraine	LE.RHC02.00 3	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Russia	LE.RHC02.00 1	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Turkey	LE.RHC02.01 9	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 4	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 5	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 2	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 3	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 6	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.01 1	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 8	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Middle East	LE.RHC02.00 9	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Algeria	LE.RHC02.01 0	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.01 7	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Japan	LE.RHC02.04 8	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	USA	LE.RHC02.04 6	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Hong Kong	LE.RHC02.05 0	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	China	LE.RHC02.04 9	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.01 8	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.01 6	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	South Africa	LE.RHC02.01 5	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	UK	LE.RHC02.04 5	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Switzerland	LE.RHC02.04 4	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Poland	LE.RHC02.03 8	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Italy	LE.RHC02.03 6	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Israel	LE.RHC02.03 5	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Greece	LE.RHC02.03 2	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Cyprus	LE.RHC02.02 7	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Portugal	LE.RHC02.03 9	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Hungary	LE.RHC02.03 4	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.02 3	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.02 2	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G03iss	Baltic	LE.RHC02.02 4	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RHC02.042	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	Romania	LE.RHC02.040	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	Austria	LE.RHC02.021	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	3rd WiFi 2x2 BGN+ BT
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	3rd WiFi 1x1 BGN
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0903.044	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0903.041	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Albania/Macedonia	LE.L0903.015	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Australia/ New Zealand	LE.L0903.049	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501P-C5 2G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Switzerland	LE.L0A03.044	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Serbia/Bosnia-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501P-C5 2G03iss	Slovenia/Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501P-C5 2G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGCssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501-C52 G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501-C52 G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Slovenia/Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Luxembourg	LE.L0602.018	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501-C52 G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Australia/ New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGCcssK_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Philippine s	LE.RK503.001	ICONIA_Tab_W501_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Philippine s	LE.RK502.027	ICONIA_Tab_W501_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGCcss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501-C52 G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT

Table 7-8. Model Definition

Model	Country	Acer Part No	BOM Name	Wireless LAN1
ICONIA_Tab_W501-C52 G03iss	Slovenia/Croatia	LE.RK502.020	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Serbia/Bosnia-Herzegovina	LE.RK502.026	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Albania/Macedonia	LE.RK502.001	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Luxembourg	LE.RK502.018	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W501-C52 G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN+ BT
ICONIA_Tab_W500-C52 G06iss	WW	S2.RK502.001	ICONIA_Tab_W501_UMAGCss_3	3rd WiFi 1x1 BGN

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Switzerland	LE.L0803.026	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Australia/ New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	China	LE.RK602.052	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RK602.023	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RK602.018	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMACssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500_UMACssK_3	N	1.3M HD
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RHC02.025	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Spain	LE.RHC02.043	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Holland	LE.RHC02.033	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Korea	LE.RHC02.052	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Czech	LE.RHC02.028	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RHC02.056	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.055	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.002	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.007	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.014	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC03.002	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC02.047	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.051	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.054	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.053	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RHC02.003	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.001	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RHC02.019	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.004	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.005	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.012	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.013	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.006	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.011	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.008	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.009	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RHC02.010	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.017	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC02.048	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	USA	LE.RHC02.046	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RHC02.050	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	China	LE.RHC02.049	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.018	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.016	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.015	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	UK	LE.RHC02.045	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RHC02.044	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Poland	LE.RHC02.038	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Italy	LE.RHC02.036	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Israel	LE.RHC02.035	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Greece	LE.RHC02.032	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RHC02.027	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RHC02.039	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RHC02.034	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.023	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.022	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.024	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RHC02.042	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Romania	LE.RHC02.040	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Austria	LE.RHC02.021	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	1.3M HD	1.3M HD
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	N	1.3M HD
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	N	1.3M HD
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	N	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Switzerland	LE.L0903.044	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W501P-C52G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0903.041	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Albania/Macedonia	LE.L0903.015	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P_UMAGCcssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W5 01P-C52G03iss	Holland	LE.L0903.033	ICONIA_Tab_W50 1P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W50 1P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Germany	LE.L0903.031	ICONIA_Tab_W50 1P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	France	LE.L0903.030	ICONIA_Tab_W50 1P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W50 1P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Australia/ New Zealand	LE.L0903.049	ICONIA_Tab_W50 1P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	WW	S2.L0903.001	ICONIA_Tab_W50 1P_UMAGCcssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Singapore	LE.L0A03.04 7	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Singapore	LE.L0A03.04 6	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Ukraine	LE.L0A03.00 3	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Russia	LE.L0A03.00 1	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Russia	LE.L0A03.00 2	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Turkey	LE.L0A03.01 9	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Middle East	LE.L0A03.01 1	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Middle East	LE.L0A03.01 3	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Middle East	LE.L0A03.01 0	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Middle East	LE.L0A03.00 9	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Middle East	LE.L0A03.00 6	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD
ICONIA_Tab_W5 01P-C52G03iss	Middle East	LE.L0A03.01 2	ICONIA_Tab_W50 1P_UMAGCcss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Switzerland	LE.L0A03.044	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Slovenia/Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Slovenia/Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W501-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.L0602.018	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Australia/New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGCssK_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Slovenia/Croatia	LE.RK502.020	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK502.026	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD

Table 7-9. Model Definition

Model	Country	Acer Part No	BOM Name	Camera 2	Camera
ICONIA_Tab_W501-C52G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Albania/Macedonia	LE.RK502.001	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.RK502.018	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGCss_3	1.3M HD	1.3M HD

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Switzerland	LE.L0803.026	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Australia/ New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500-C 52G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Philippine s	LE.RK603.007	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Philippine s	LE.RK602.048	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	USA	LE.RK602.047	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	China	LE.RK602.052	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	UK	LE.RK602.026	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Switzerlan d	LE.RK602.025	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Slovenia/ Croatia	LE.RK602.023	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Serbia/Bo snia-Herz egovina	LE.RK602.022	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Albania/M acedonia	LE.RK602.002	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Luxembou rg	LE.RK602.018	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	France	LE.RK602.011	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500 _UMACssK_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Belgium	LE.RHC02.02 5	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Spain	LE.RHC02.04 3	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Holland	LE.RHC02.03 3	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Korea	LE.RHC02.05 2	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Czech	LE.RHC02.02 8	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Vietnam	LE.RHC02.05 6	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500-C 52G03iss	Indonesia	LE.RHC02.05 5	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Russia	LE.RHC02.00 2	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 7	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.01 4	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Philippine s	LE.RHC03.00 2	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Philippine s	LE.RHC02.04 7	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Indonesia	LE.RHC02.05 1	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Singapore	LE.RHC02.05 4	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Singapore	LE.RHC02.05 3	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Ukraine	LE.RHC02.00 3	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Russia	LE.RHC02.00 1	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Turkey	LE.RHC02.01 9	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 4	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 5	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.01 2	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.01 3	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 6	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.01 1	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 8	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 9	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500-C 52G03iss	Algeria	LE.RHC02.01 0	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RHC02.01 7	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Japan	LE.RHC02.04 8	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	USA	LE.RHC02.04 6	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Hong Kong	LE.RHC02.05 0	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	China	LE.RHC02.04 9	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RHC02.01 8	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RHC02.01 6	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RHC02.01 5	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	UK	LE.RHC02.04 5	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Switzerlan d	LE.RHC02.04 4	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Poland	LE.RHC02.03 8	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Italy	LE.RHC02.03 6	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Israel	LE.RHC02.03 5	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Greece	LE.RHC02.03 2	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Cyprus	LE.RHC02.02 7	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Portugal	LE.RHC02.03 9	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Hungary	LE.RHC02.03 4	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RHC02.02 3	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RHC02.02 2	ICONIA_Tab_W500 _UMACss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.024	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RHC02.042	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Romania	LE.RHC02.040	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Austria	LE.RHC02.021	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Switzerland	LE.L0903.044	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W501P-C52G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0903.041	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Albania/Macedonia	LE.L0903.015	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W501P-C52G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Australia/ New Zealand	LE.L0903.049	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UMAGCcssK_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UMAGCcss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Switzerland	LE.L0A03.044	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Slovenia/Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C52G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C52G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGCssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W501-C 52G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Philippine s	LE.L0602.027	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Switzerlan d	LE.L0602.025	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Slovenia/ Croatia	LE.L0602.023	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W501-C 52G03iss	Serbia/Bo snia-Herz egovina	LE.L0602.022	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Albania/M acedonia	LE.L0602.001	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Luxembou rg	LE.L0602.018	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	France	LE.L0602.011	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Australia/ New Zealand	LE.L0602.030	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	WW	S2.L0602.001	ICONIA_Tab_W501 _UMAGCssK_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	UK	LE.RK502.023	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Philippine s	LE.RK503.001	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Philippine s	LE.RK502.027	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W501-C 52G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Switzerlan d	LE.RK502.022	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Slovenia/ Croatia	LE.RK502.020	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Serbia/Bo snia-Herz egovina	LE.RK502.026	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH

Table 7-10. Model Definition

Model	Country	Acer Part No	BOM Name	NB Chipset
ICONIA_Tab_W501-C 52G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Albania/M acedonia	LE.RK502.001	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Luxembou rg	LE.RK502.018	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH
ICONIA_Tab_W501-C 52G03iss	France	LE.RK502.011	ICONIA_Tab_W501 _UMAGCss_3	AMD A50M FCH

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMACssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Switzerland	LE.L0803.026	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMACssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0803.015	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Slovenia/Croatia	LE.L0803.024	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Albania/Macedonia	LE.L0803.001	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0803.020	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMACssK_3	N
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMACss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMACss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500P-C52G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMACss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Australia/New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMACssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Ukraine	LE.RK602.036	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Russia	LE.RK602.034	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Turkey	LE.RK602.041	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.029	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.030	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.031	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.032	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.033	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.028	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_ UMACssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	China	LE.RK602.052	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_ UMACssK_3	N
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_ UMACssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RK602.023	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RK602.018	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500_UMACssK_3	N
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RHC02.025	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Spain	LE.RHC02.043	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Holland	LE.RHC02.033	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Korea	LE.RHC02.052	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Czech	LE.RHC02.028	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RHC02.056	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.055	ICONIA_Tab_W500_UMACss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500-C 52G03iss	Russia	LE.RHC02.00 2	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 7	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.01 4	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Philippines	LE.RHC03.00 2	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Philippines	LE.RHC02.04 7	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Indonesia	LE.RHC02.05 1	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Singapore	LE.RHC02.05 4	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Singapore	LE.RHC02.05 3	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Ukraine	LE.RHC02.00 3	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Russia	LE.RHC02.00 1	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Turkey	LE.RHC02.01 9	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 4	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 5	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.01 2	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.01 3	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 6	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.01 1	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 8	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Middle East	LE.RHC02.00 9	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Algeria	LE.RHC02.01 0	ICONIA_Tab_W500_ UMACss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RHC02.01 7	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Japan	LE.RHC02.04 8	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	USA	LE.RHC02.04 6	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Hong Kong	LE.RHC02.05 0	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	China	LE.RHC02.04 9	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RHC02.01 8	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RHC02.01 6	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	South Africa	LE.RHC02.01 5	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	UK	LE.RHC02.04 5	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Switzerland	LE.RHC02.04 4	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Poland	LE.RHC02.03 8	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Italy	LE.RHC02.03 6	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Israel	LE.RHC02.03 5	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Greece	LE.RHC02.03 2	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Cyprus	LE.RHC02.02 7	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Portugal	LE.RHC02.03 9	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Hungary	LE.RHC02.03 4	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RHC02.02 3	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RHC02.02 2	ICONIA_Tab_W500_ UMACss_3	N
ICONIA_Tab_W500-C 52G03iss	Baltic	LE.RHC02.02 4	ICONIA_Tab_W500_ UMACss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RHC02.042	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.041	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Romania	LE.RHC02.040	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RHC02.026	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RHC02.020	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RHC02.037	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Austria	LE.RHC02.021	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Germany	LE.RHC02.031	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.030	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	N
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	N
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	N
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCcssK_3	N
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCcssK_3	N
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCcssK_3	N
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCcssK_3	N
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAGCcssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Switzerland	LE.L0903.044	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAGCssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W501P-C52G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0903.041	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Albania/Macedonia	LE.L0903.015	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UMAGCssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W501P-C52G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Australia/New Zealand	LE.L0903.049	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UMAGCssK_3	N
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAGCss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Switzerland	LE.L0A03.044	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAGCss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W501P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Slovenia/Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	N
ICONIA_Tab_W501-C52G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGCssK_3	N
ICONIA_Tab_W501-C52G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGCssK_3	N
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGCssK_3	N
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGCssK_3	N
ICONIA_Tab_W501-C52G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGCssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W501-C 52G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Slovenia/Cr oatia	LE.L0602.023	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Serbia/Bos nia-Herzeg ovina	LE.L0602.022	ICONIA_Tab_W501_ UMAGCcssK_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W501-C 52G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Albania/Ma cedonia	LE.L0602.001	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Luxembour g	LE.L0602.018	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	France	LE.L0602.011	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	Australia/N ew Zealand	LE.L0602.030	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_ UMAGCcssK_3	N
ICONIA_Tab_W501-C 52G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_ UMAGCcss_3	N
ICONIA_Tab_W501-C 52G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_ UMAGCcss_3	N
ICONIA_Tab_W501-C 52G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_ UMAGCcss_3	N
ICONIA_Tab_W501-C 52G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_ UMAGCcss_3	N
ICONIA_Tab_W501-C 52G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_ UMAGCcss_3	N
ICONIA_Tab_W501-C 52G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_ UMAGCcss_3	N
ICONIA_Tab_W501-C 52G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_ UMAGCcss_3	N
ICONIA_Tab_W501-C 52G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_ UMAGCcss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W501-C 52G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Slovenia/Cr oatia	LE.RK502.020	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Serbia/Bos nia-Herzeg ovina	LE.RK502.026	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501_ UMAGCss_3	N
ICONIA_Tab_W501-C 52G03iss	Albania/Ma cedonia	LE.RK502.001	ICONIA_Tab_W501_ UMAGCss_3	N

Table 7-11. Model Definition

Model	Country	Acer Part No	BOM Name	SB Chipset
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.RK502.018	ICONIA_Tab_W501_UMAGCss_3	N
ICONIA_Tab_W501-C52G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501_UMAGCss_3	N
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGCss_3	N
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGCss_3	N
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGCss_3	N
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGCss_3	N

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500P-C52G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMACssK_3	3CELL3.26
ICONIA_Tab_W500P-C52G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMACssK_3	3CELL3.26
ICONIA_Tab_W500P-C52G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMACssK_3	3CELL3.26
ICONIA_Tab_W500P-C52G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMACssK_3	3CELL3.26
ICONIA_Tab_W500P-C52G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMACssK_3	3CELL3.26
ICONIA_Tab_W500P-C52G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMACssK_3	3CELL3.26
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMACssK_3	3CELL3.26
ICONIA_Tab_W500P-C52G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMACssK_3	3CELL3.26
ICONIA_Tab_W500P-C52G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMACssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Switzerlan d	LE.L0803.026	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500P -C52G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Serbia/Bos nia-Herzeg ovina	LE.L0803.015	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Slovenia/C roatia	LE.L0803.024	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Albania/Ma cedonia	LE.L0803.001	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Luxembour g	LE.L0803.020	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500P -C52G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	France	LE.L0803.010	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P _UMACssK_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P _UMACss_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Switzerlan d	LE.L0703.043	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P _UMACss_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500P -C52G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Serbia/Bos nia-Herzeg ovina	LE.L0703.041	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Slovenia/C roatia	LE.L0703.042	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Albania/Ma cedonia	LE.L0703.020	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Luxembour g	LE.L0703.037	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	France	LE.L0703.030	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500P -C52G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P _UMACss_3	3CELL3.26
ICONIA_Tab_W500- C52G03iss	India	LE.RK602.05 9	ICONIA_Tab_W500_ UMACssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500-C52G03iss	Australia/New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.035	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.042	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.045	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK603.009	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK603.007	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RK603.008	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK602.054	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Malaysia	LE.RK602.057	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK602.048	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.051	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.050	ICONIA_Tab_W500_UMACssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RK602.03 6	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.03 4	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RK602.04 1	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.02 9	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.03 0	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.03 1	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.03 2	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.03 3	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.02 8	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.04 3	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.04 4	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RK602.02 7	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.03 9	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Canada	LE.RK602.04 6	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	USA	LE.RK602.04 7	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	China	LE.RK602.05 2	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.04 0	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.03 8	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.03 7	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	UK	LE.RK602.02 6	ICONIA_Tab_W500_UMACssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.004	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.006	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RK602.023	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.022	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Romania	LE.RK602.021	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RK602.001	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RK602.002	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RK602.018	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Austria	LE.RK602.003	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Germany	LE.RK602.012	ICONIA_Tab_W500_UMACssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500-C52G03iss	France	LE.RK602.011	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RK602.010	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	GCTWN	S2.RK602.001	ICONIA_Tab_W500_UMACssK_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RHC02.025	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Spain	LE.RHC02.043	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Holland	LE.RHC02.033	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Korea	LE.RHC02.052	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Czech	LE.RHC02.028	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RHC02.056	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.055	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.002	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.007	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.014	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC03.002	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC02.047	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.051	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.054	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.053	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RHC02.003	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.001	ICONIA_Tab_W500_UMACss_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RHC02.01 9	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 4	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 5	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.01 2	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.01 3	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 6	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.01 1	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 8	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 9	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RHC02.01 0	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.01 7	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC02.04 8	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	USA	LE.RHC02.04 6	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RHC02.05 0	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	China	LE.RHC02.04 9	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.01 8	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.01 6	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.01 5	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	UK	LE.RHC02.04 5	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RHC02.04 4	ICONIA_Tab_W500_UMACss_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500-C52G03iss	Poland	LE.RHC02.03 8	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Italy	LE.RHC02.03 6	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Israel	LE.RHC02.03 5	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Greece	LE.RHC02.03 2	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RHC02.02 7	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RHC02.03 9	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RHC02.03 4	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.02 3	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.02 2	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.02 4	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RHC02.04 2	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.04 1	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Romania	LE.RHC02.04 0	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RHC02.02 6	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RHC02.02 0	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RHC02.03 7	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Austria	LE.RHC02.02 1	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Germany	LE.RHC02.03 1	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.03 0	ICONIA_Tab_W500_UMACss_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.029	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.001	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.003	ICONIA_Tab_W500_UMACss_3	3CELL3.26
Tab-C52G03iss	WW	S2.RHC02.001	ICONIA_Tab_W500_UMACss_3	3CELL3.26
Tab-C52G03iss	WW	S2.RHC02.002	ICONIA_Tab_W500_UMACss_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAGCcssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Switzerlan d	LE.L0903.044	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W501P -C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0903.041	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Slovenia/Croatia	LE.L0903.042	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Albania/Macedonia	LE.L0903.015	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Luxembourg	LE.L0903.037	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	France	LE.L0903.030	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Australia/New Zealand	LE.L0903.049	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P _UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Switzerlan d	LE.L0A03.044	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P _UMAGCss_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W501P -C52G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Serbia/Bos nia-Herzeg ovina	LE.L0A03.040	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Slovenia/C roatia	LE.L0A03.041	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Albania/Ma cedonia	LE.L0A03.020	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Luxembour g	LE.L0A03.037	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26
ICONIA_Tab_W501P -C52G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P _UMAGCcss_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W501P-C52G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Slovenia/Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.L0602.018	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W501-C52G03iss	Australia/New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGCssK_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26

Table 7-12. Model Definition

Model	Country	Acer Part No	BOM Name	Battery
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.00 4	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.00 3	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.00 5	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Slovenia/Croatia	LE.RK502.02 0	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK502.02 6	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Romania	LE.RK502.02 5	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Bulgaria	LE.RK502.00 7	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Czech	LE.RK502.00 9	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Albania/Macedonia	LE.RK502.00 1	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.RK502.01 8	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Austria	LE.RK502.00 2	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.01 4	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.00 6	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.01 2	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGCss_3	3CELL3.26

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500P -C52G03iss	UK	LE.L0803.027	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Czech	LE.L0803.009	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Philippines	LE.L0803.054	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Vietnam	LE.L0803.053	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	GCTWN	LE.L0803.048	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Thailand	LE.L0803.049	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0803.052	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0803.051	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Ukraine	LE.L0803.045	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0803.043	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0803.044	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Turkey	LE.L0803.042	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.034	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.036	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.033	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.032	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.029	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.035	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.028	ICONIA_Tab_W500P_UMAC ssK_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.037	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.030	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0803.031	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Algeria	LE.L0803.016	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.038	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.040	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.041	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0803.039	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Switzerlan d	LE.L0803.026	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Poland	LE.L0803.021	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Italy	LE.L0803.019	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Israel	LE.L0803.018	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0803.005	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Greece	LE.L0803.012	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Spain	LE.L0803.025	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Cyprus	LE.L0803.008	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Portugal	LE.L0803.022	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Hungary	LE.L0803.017	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0803.003	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0803.004	ICONIA_Tab_W500P_UMAC ssK_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500P -C52G03iss	Serbia/Bos nia-Herzeg ovina	LE.L0803.015	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Slovenia/C roatia	LE.L0803.024	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Romania	LE.L0803.023	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Bulgaria	LE.L0803.007	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Albania/Ma cedonia	LE.L0803.001	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Austria	LE.L0803.002	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Luxembour g	LE.L0803.020	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Holland	LE.L0803.013	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Belgium	LE.L0803.006	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Germany	LE.L0803.011	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	France	LE.L0803.010	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Denmark	LE.L0803.014	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	USA	LE.L0803.047	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Canada	LE.L0803.046	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	Hong Kong	LE.L0803.050	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	WW	S2.L0803.001	ICONIA_Tab_W500P_UMAC ssK_3	40W
ICONIA_Tab_W500P -C52G03iss	UK	LE.L0703.045	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Czech	LE.L0703.028	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Vietnam	LE.L0703.049	ICONIA_Tab_W500P_UMAC ss_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0703.048	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Singapore	LE.L0703.047	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Ukraine	LE.L0703.003	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0703.001	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Russia	LE.L0703.002	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Turkey	LE.L0703.019	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.011	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.013	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.010	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.009	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.006	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.012	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.014	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.005	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.007	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Middle East	LE.L0703.008	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Algeria	LE.L0703.004	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.015	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.017	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.018	ICONIA_Tab_W500P_UMAC ss_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500P -C52G03iss	South Africa	LE.L0703.016	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Switzerland	LE.L0703.043	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Poland	LE.L0703.038	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Italy	LE.L0703.036	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Israel	LE.L0703.035	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0703.024	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Greece	LE.L0703.032	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Spain	LE.L0703.044	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Cyprus	LE.L0703.027	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Portugal	LE.L0703.039	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Hungary	LE.L0703.034	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0703.022	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Baltic	LE.L0703.023	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0703.041	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Slovenia/Croatia	LE.L0703.042	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Romania	LE.L0703.040	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Bulgaria	LE.L0703.026	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Albania/Macedonia	LE.L0703.020	ICONIA_Tab_W500P_UMAC ss_3	40W
ICONIA_Tab_W500P -C52G03iss	Austria	LE.L0703.021	ICONIA_Tab_W500P_UMAC ss_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500P-C52G03iss	Luxembourg	LE.L0703.037	ICONIA_Tab_W500P_UMACss_3	40W
ICONIA_Tab_W500P-C52G03iss	Holland	LE.L0703.033	ICONIA_Tab_W500P_UMACss_3	40W
ICONIA_Tab_W500P-C52G03iss	Belgium	LE.L0703.025	ICONIA_Tab_W500P_UMACss_3	40W
ICONIA_Tab_W500P-C52G03iss	Germany	LE.L0703.031	ICONIA_Tab_W500P_UMACss_3	40W
ICONIA_Tab_W500P-C52G03iss	France	LE.L0703.030	ICONIA_Tab_W500P_UMACss_3	40W
ICONIA_Tab_W500P-C52G03iss	Denmark	LE.L0703.029	ICONIA_Tab_W500P_UMACss_3	40W
ICONIA_Tab_W500P-C52G03iss	Japan	LE.L0703.046	ICONIA_Tab_W500P_UMACss_3	40W
ICONIA_Tab_W500P-C52G03iss	Canada	LE.L0702.001	ICONIA_Tab_W500P_UMACss_3	40W
ICONIA_Tab_W500P-C52G03iss	WW	S2.L0703.001	ICONIA_Tab_W500P_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	India	LE.RK602.059	ICONIA_Tab_W500_UMACssK_3	40W
ICONIA_Tab_W500-C52G03iss	Australia/New Zealand	LE.RK602.049	ICONIA_Tab_W500_UMACssK_3	40W
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RK602.007	ICONIA_Tab_W500_UMACssK_3	40W
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RK602.053	ICONIA_Tab_W500_UMACssK_3	40W
ICONIA_Tab_W500-C52G03iss	Korea	LE.RK602.055	ICONIA_Tab_W500_UMACssK_3	40W
ICONIA_Tab_W500-C52G03iss	Czech	LE.RK602.009	ICONIA_Tab_W500_UMACssK_3	40W
ICONIA_Tab_W500-C52G03iss	Holland	LE.RK602.014	ICONIA_Tab_W500_UMACssK_3	40W
ICONIA_Tab_W500-C52G03iss	Spain	LE.RK602.024	ICONIA_Tab_W500_UMACssK_3	40W
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RK602.058	ICONIA_Tab_W500_UMACssK_3	40W
ICONIA_Tab_W500-C52G03iss	GCTWN	LE.RK602.056	ICONIA_Tab_W500_UMACssK_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.03 5	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.04 2	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.04 5	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK603.00 9	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK603.00 7	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RK603.00 8	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Thailand	LE.RK602.05 4	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Malaysia	LE.RK602.05 7	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RK602.04 8	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.05 1	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RK602.05 0	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RK602.03 6	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Russia	LE.RK602.03 4	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RK602.04 1	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.02 9	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.03 0	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.03 1	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.03 2	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.03 3	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.02 8	ICONIA_Tab_W500_UMACss K_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.043	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RK602.044	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RK602.027	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.039	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Canada	LE.RK602.046	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	USA	LE.RK602.047	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	China	LE.RK602.052	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.040	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.038	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RK602.037	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	UK	LE.RK602.026	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RK602.025	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Poland	LE.RK602.019	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Italy	LE.RK602.017	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Israel	LE.RK602.016	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Greece	LE.RK602.013	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RK602.008	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RK602.020	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RK602.015	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.005	ICONIA_Tab_W500_UMACss K_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.00 4	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RK602.00 6	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RK602.02 3	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK602.02 2	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Romania	LE.RK602.02 1	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RK602.00 1	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RK602.00 2	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RK602.01 8	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Austria	LE.RK602.00 3	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Germany	LE.RK602.01 2	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	France	LE.RK602.01 1	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RK602.01 0	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	GCTWN	S2.RK602.00 1	ICONIA_Tab_W500_UMACss K_3	40W
ICONIA_Tab_W500-C52G03iss	Belgium	LE.RHC02.02 5	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Spain	LE.RHC02.04 3	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Holland	LE.RHC02.03 3	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Korea	LE.RHC02.05 2	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Czech	LE.RHC02.02 8	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Vietnam	LE.RHC02.05 6	ICONIA_Tab_W500_UMACss _3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.05 5	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.00 2	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 7	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.01 4	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC03.00 2	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Philippines	LE.RHC02.04 7	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Indonesia	LE.RHC02.05 1	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.05 4	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Singapore	LE.RHC02.05 3	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Ukraine	LE.RHC02.00 3	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Russia	LE.RHC02.00 1	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Turkey	LE.RHC02.01 9	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 4	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 5	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.01 2	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.01 3	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 6	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.01 1	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 8	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Middle East	LE.RHC02.00 9	ICONIA_Tab_W500_UMACss _3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500-C52G03iss	Algeria	LE.RHC02.010	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.017	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC02.048	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	USA	LE.RHC02.046	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Hong Kong	LE.RHC02.050	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	China	LE.RHC02.049	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.018	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.016	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	South Africa	LE.RHC02.015	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	UK	LE.RHC02.045	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Switzerland	LE.RHC02.044	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Poland	LE.RHC02.038	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Italy	LE.RHC02.036	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Israel	LE.RHC02.035	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Greece	LE.RHC02.032	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Cyprus	LE.RHC02.027	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Portugal	LE.RHC02.039	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Hungary	LE.RHC02.034	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.023	ICONIA_Tab_W500_UMACss_3	40W
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.022	ICONIA_Tab_W500_UMACss_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W500-C52G03iss	Baltic	LE.RHC02.02 4	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Slovenia/Croatia	LE.RHC02.04 2	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RHC02.04 1	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Romania	LE.RHC02.04 0	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Bulgaria	LE.RHC02.02 6	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Albania/Macedonia	LE.RHC02.02 0	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Luxembourg	LE.RHC02.03 7	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Austria	LE.RHC02.02 1	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Germany	LE.RHC02.03 1	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	France	LE.RHC02.03 0	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Denmark	LE.RHC02.02 9	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	Japan	LE.RHC03.00 1	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W500-C52G03iss	WW	S2.RHC02.00 3	ICONIA_Tab_W500_UMACss _3	40W
Tab-C52G03iss	WW	S2.RHC02.00 1	ICONIA_Tab_W500_UMACss _3	40W
Tab-C52G03iss	WW	S2.RHC02.00 2	ICONIA_Tab_W500_UMACss _3	40W
ICONIA_Tab_W501P-C52G03iss	Thailand	LE.L0903.048	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.047	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P-C52G03iss	Singapore	LE.L0903.046	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P-C52G03iss	Ukraine	LE.L0903.003	ICONIA_Tab_W501P_UMAG CssK_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0903.001	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0903.002	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Turkey	LE.L0903.021	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.011	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.013	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.010	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.009	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.006	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.012	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.005	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.014	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.007	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0903.008	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Algeria	LE.L0903.004	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.022	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.019	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.020	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0903.018	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	UK	LE.L0903.045	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Switzerlan d	LE.L0903.044	ICONIA_Tab_W501P_UMAG CssK_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W501P -C52G03iss	Poland	LE.L0903.038	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Italy	LE.L0903.036	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Israel	LE.L0903.035	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0903.024	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Greece	LE.L0903.032	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Spain	LE.L0903.043	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Cyprus	LE.L0903.027	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Portugal	LE.L0903.039	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Hungary	LE.L0903.034	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0903.017	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0903.023	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Serbia/Bos nia-Herzeg ovina	LE.L0903.041	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Slovenia/C roatia	LE.L0903.042	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Romania	LE.L0903.040	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Bulgaria	LE.L0903.026	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Albania/Ma cedonia	LE.L0903.015	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Czech	LE.L0903.028	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Austria	LE.L0903.016	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Luxembour g	LE.L0903.037	ICONIA_Tab_W501P_UMAG CssK_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W501P -C52G03iss	Holland	LE.L0903.033	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Belgium	LE.L0903.025	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Germany	LE.L0903.031	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	France	LE.L0903.030	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Denmark	LE.L0903.029	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Australia/N ew Zealand	LE.L0903.049	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	WW	S2.L0903.001	ICONIA_Tab_W501P_UMAG CssK_3	40W
ICONIA_Tab_W501P -C52G03iss	Singapore	LE.L0A03.047	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Singapore	LE.L0A03.046	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Ukraine	LE.L0A03.003	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0A03.001	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Russia	LE.L0A03.002	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Turkey	LE.L0A03.019	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.011	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.013	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.010	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.009	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.006	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.012	ICONIA_Tab_W501P_UMAG Css_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.005	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.014	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.007	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Middle East	LE.L0A03.008	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Algeria	LE.L0A03.004	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.015	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.017	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.018	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	South Africa	LE.L0A03.016	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	UK	LE.L0A03.045	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Switzerlan d	LE.L0A03.044	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Poland	LE.L0A03.038	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Italy	LE.L0A03.036	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Israel	LE.L0A03.035	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Baltic	LE.L0A03.024	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Greece	LE.L0A03.032	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Spain	LE.L0A03.043	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Cyprus	LE.L0A03.029	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Portugal	LE.L0A03.042	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P -C52G03iss	Hungary	LE.L0A03.034	ICONIA_Tab_W501P_UMAG Css_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.022	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Baltic	LE.L0A03.023	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0A03.040	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Slovenia/Croatia	LE.L0A03.041	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Romania	LE.L0A03.039	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Bulgaria	LE.L0A03.026	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Albania/Macedonia	LE.L0A03.020	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Czech	LE.L0A03.027	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Austria	LE.L0A03.021	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Luxembourg	LE.L0A03.037	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Holland	LE.L0A03.033	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Belgium	LE.L0A03.025	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Germany	LE.L0A03.031	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	France	LE.L0A03.030	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	Denmark	LE.L0A03.028	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501P-C52G03iss	WW	S2.L0A03.001	ICONIA_Tab_W501P_UMAG Css_3	40W
ICONIA_Tab_W501-C52G03iss	India	LE.L0602.034	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	UK	LE.L0602.026	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.L0602.031	ICONIA_Tab_W501_UMAGC ssK_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.L0602.035	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Thailand	LE.L0602.029	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Malaysia	LE.L0602.028	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Philippines	LE.L0602.027	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.033	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Singapore	LE.L0602.032	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Denmark	LE.L0602.010	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.L0602.025	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Poland	LE.L0602.019	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Italy	LE.L0602.017	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Israel	LE.L0602.016	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Greece	LE.L0602.013	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.L0602.008	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Spain	LE.L0602.024	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Portugal	LE.L0602.020	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Hungary	LE.L0602.015	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.004	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.003	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Baltic	LE.L0602.005	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Slovenia/Croatia	LE.L0602.023	ICONIA_Tab_W501_UMAGC ssK_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W501-C52G03iss	Serbia/Bosnia-Herzegovina	LE.L0602.022	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Romania	LE.L0602.021	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Bulgaria	LE.L0602.007	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Czech	LE.L0602.009	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Albania/Macedonia	LE.L0602.001	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.L0602.018	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Austria	LE.L0602.002	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Holland	LE.L0602.014	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Belgium	LE.L0602.006	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Germany	LE.L0602.012	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	France	LE.L0602.011	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	Australia/New Zealand	LE.L0602.030	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	WW	S2.L0602.001	ICONIA_Tab_W501_UMAGC ssK_3	40W
ICONIA_Tab_W501-C52G03iss	UK	LE.RK502.023	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Vietnam	LE.RK502.031	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK503.001	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Indonesia	LE.RK503.002	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Philippines	LE.RK502.027	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.030	ICONIA_Tab_W501_UMAGC ss_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W501-C52G03iss	Singapore	LE.RK502.029	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Denmark	LE.RK502.010	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Hong Kong	LE.RK502.028	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Switzerland	LE.RK502.022	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Poland	LE.RK502.019	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Italy	LE.RK502.017	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Israel	LE.RK502.016	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Greece	LE.RK502.013	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Cyprus	LE.RK502.008	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Spain	LE.RK502.021	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Portugal	LE.RK502.024	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Hungary	LE.RK502.015	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.004	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.003	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Baltic	LE.RK502.005	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Slovenia/Croatia	LE.RK502.020	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Serbia/Bosnia-Herzegovina	LE.RK502.026	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Romania	LE.RK502.025	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Bulgaria	LE.RK502.007	ICONIA_Tab_W501_UMAGC ss_3	40W

Table 7-13. Model Definition

Model	Country	Acer Part No	BOM Name	Adapter
ICONIA_Tab_W501-C52G03iss	Czech	LE.RK502.009	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Albania/Macedonia	LE.RK502.001	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Luxembourg	LE.RK502.018	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Austria	LE.RK502.002	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Holland	LE.RK502.014	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Belgium	LE.RK502.006	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	Germany	LE.RK502.012	ICONIA_Tab_W501_UMAGC ss_3	40W
ICONIA_Tab_W501-C52G03iss	France	LE.RK502.011	ICONIA_Tab_W501_UMAGC ss_3	40W

CHAPTER 8

Test Compatible Components

Microsoft® Windows® 7 Environment Test	8-2
ICONIA Tab W500.....	8-2

Test Compatible Components

This computer's compatibility is tested and verified by Acer's internal testing department. All of its system functions are tested under Windows® 7 environment.

Refer to the following lists for components, adapter cards, and peripherals which have passed these tests. Regarding configuration, combination and test procedures, please refer to the Compatibility Test Report released by the Acer Mobile System Testing Department.

Microsoft® Windows® 7 Environment Test

ICONIA Tab W500

Table 8-1. ICONIA Tab W500

Vendor	Type	Description	Acer Part No.
CMOS			
0420-00800PB		Suyin 1.3M HD SY_6A1(TSV)_SP	AM.21400.091
0420-008U0PB		Liteon 1.3M LT_6A1(CSP)_SP	AM.21400.092
0420-008X0PB		Chicony 1.3M CH_6A1(CSP)_SP	AM.21400.093
0420-008V0PB		Suyin 1.3M HD SY_6A1(CSP)_SP	AM.21400.094
0420-008S0PB		Liteon 1.3M HD LT_2659_AU	AM.21400.095
0420-008W0PB		Chicony 1.3M HD CH_6A1(CSP)_SN234	AM.21400.096
0420-008Y0PB		Suyin 1.3M HD SY_2659_AU	AM.21400.097
0420-008T1PB		Liteon 1.3M HD LT_6A1(TSV)_SP (9A)	AM.21400.100
0420-008N0PB		Chicony 1.3M CH_6A1(TSV)_SP (9A)	AM.21400.101
0420-008R0PB		Suyin 1.3M HD SY_6A1(TSV)_SP (9A)	AM.21400.102
GPS			
0C09-000M0PB		FOXCONN/T77H288.00	LC.GPS00.001
WLAN			
0C05-00ER0PB		Foxconn Wirelss LAN Broadcom 4313 1x1 BGN (HM) T77H194.00	NI.23600.076
0C05-00DT0PB		Foxconn Wirelss LAN Atheros HB95 1x1 BGN (HM) L	NI.23600.078
No Datasheet		Foxconn Wirelss LAN Atheros HB125 1x1 BGN	NI.23600.085
No Datasheet		Liteon Wireless LAN Atheros HB125 1x1 BGN	NI.23600.086
0C05-00EQ0PB		Liteon Wireless LAN Reltek RTL8188CE 1x1 BGN	NI.23600.088
No Datasheet		Foxconn Wirelss LAN Broadcom 4313 IPA 1x1 BGN	NI.23600.090
0C08-003Q0PB		Hon Hai Wireless LAN Atheros WB195	NI.23600.092
3G			
0C06-002T0PB		Huawei EM770W-Rev2	LC.21300.066

Table 8-1. ICONIA Tab W500

Vendor	Type	Description	Acer Part No.
SSD			
1901-001J0PB		Flash Disk SAMSUNG SSD NAND 32GB MZMPA032HMCD-000 LF+HF	KF.0320B.002
1901-001B0PB		Flash Disk SANDISK SSD NAND 32GB SDSA4DH-032G LF+HF	KF.0320D.001
1901-001N0PB		Flash Disk SAMSUNG SSD NAND 64GB MZMPA064HMDR-000 LF+HF	KF.0640B.005
1901-00180PB		Flash Disk SANDISK SSD NAND 64GB SDSA4DH-064G LF+HF	KF.0640D.002
CPU			
0102-00F40PB		AMD/ZM101234B2240	need CT provide
SD Card			
0A0B-003S0PB	Ci72630Q M	A-DATA/AUSDH8GCL6-PA1	IC.0800C.003
0A0B-003T0PB	Ci72720Q M	KINGSTON/RBU-SDC4/8GBCJ-ACER	IC.0800D.003

CHAPTER 9

Online Support Information

Introduction 9-1

Online Support Information

Introduction

This section describes online technical support services available to help users repair their Acer Systems.

For distributors, dealers, ASP or TPM, please refer the technical queries to a local Acer branch office. Acer Branch Offices and Regional Business Units may access our website. However some information sources will require a user i.d. and password. These can be obtained directly from Acer CSD Taiwan.

Acer's Website offers convenient and valuable support resources.

In the Technical Information section users can download information on all of Acer's Notebook, Desktop and Server models including:

- Service guides for all models
- Bios updates
- Software utilities
- Spare parts lists
- TABs (Technical Announcement Bulletin)

For these purposes, we have included an Acrobat File to facilitate the problem-free downloading of our technical material.

Also contained on this website are:

- Detailed information on Acer's International Traveller's Warranty (ITW)
- Returned material authorization procedures
- An overview of all the support services we offer, accompanied by a list of telephone, fax and email contacts for all technical queries.

We are always looking for ways to optimize and improve our services, so do not hesitate to direct any suggestions or comments to us.